

**Roads Department of the Ministry of Regional Development and
Infrastructure of Georgia**



**Sadakhlo-Algeti Road Section under East-West E-60
Highway Improvement Project Construction and Operation Project**



Environmental Impact Assessment

Tbilisi 2019

Report Structure

In line with Article 10 of the Law of Georgia On „Environmental Assessment Code“ and requirements of Scoping Opinion № 10 (30.01.2019) issued by the Ministry of Environment Protection and Agriculture of Georgia, the present EIA Report incorporates the following information:

CONTENTS

1	INTRODUCTION.....	7
	2. LEGISLATION AND NORMATIVE ACTS EFFECTIVE IN THE FIELD OF ENVIRONMENTAL PROTECTION AND ASSOCIATED WITH THE PLANNED ACTIVITY	9
3.	ANALYSIS OF ALTERNATIVE OPTIONS.....	11
	3.1 Non-project alternative – substantiation of the project need	11
	3.1.1 Results of Traffic Survey.....	12
	3.2 Alternative corridors of the highway	13
	3.2.1 Alternative 0 – widening the existing road.....	14
	3.2.2 Alternate of the New Corridor of the Highway.....	15
	3.2.2.1 Comparative Analysis of Alternatives	17
	3.2.3 Additional Options of the Main Alternate Corridors	19
4.	PROJECT DESCRIPTION.....	22
	4.1 Introduction	22
	4.2 Geometric parameters of the Road Alignment	27
	4.3 Typical cross sections of the motorway	28
	4.4 Underpasses/viaducts	30
	4.5 Bridges.....	33
	4.6 Water pipes (culverts)	35
	4.7 Road pavement.....	38
	4.8 Drainage systems and protection against erosion	39
	4.9 Road Safety	43
	4.10 Construction Organization	44
	4.10.1 Proposed camp site	45
	4.10.2 Dumpsites.....	45
	4.10.3 Supposed list of construction techniques.....	46
	4.10.4 Sources of Construction Material	47
	4.10.5 Water Supply-Sanitation	48
	4.10.6 Relocating engineering and utility lines.....	49
	4.10.7 Traffic Management during Construction	50

4.10.8 Temporary access roads	52
4.10.9 Recultivation of the temporarily used areas and hard shoulders	52
4.10.10 Road construction works - summary	52
5 NATURAL AND SOCIAL-ECONOMIC STATE OF THE PROJECT CORRIDOR – BACKGROUND PROPERTIES, FIELD STUDY RESULTS.....	53
5.1 Physical-geographical and administrative location	53
5.2 Description of natural environmental objects	54
5.2.1 Microclimatic properties	57
5.2.2 Climate change	59
5.2.3 Geology	63
5.2.3.1 Geomorphological conditions.....	63
5.2.3.2 Geology.....	64
5.2.3.3 Hydro-geology.....	66
5.2.3.4 Tectonics and seismicity ³	67
5.2.3.5 Engineering Geological Survey.....	71
5.2.3.5.1 Engineering Geological Survey by CPTu Sounding.....	73
5.2.3.5.2 Results of the Laboratory Tests.....	76
5.2.3.5.3 Empirical soil parameters	78
5.2.3.5.4 Conclusions and recommendations	78
5.2.4 Soil.....	81
5.2.5 Hydrology	81
5.2.5.1 Water peak discharges.....	83
5.3 Biological environment	88
5.3.1 Flora and vegetation cover	89
5.3.1.1 General description of the vegetation cover	89
5.3.1.2 Detailed botanical study of the study area	90
5.3.1.3 Red-Listed Species	101
5.3.2 Fauna and their habitats	102
5.3.2.1 General description of the project corridor	102
5.3.2.2 Animal species common in the project corridor and adjacent to it, mammals:	103
5.3.3 Summary of biological environment survey results.....	109
5.4 Social-Economic Environment.....	110
5.4.1 General.....	110
5.4.2 Local population.....	110
5.4.3 Economics	111
5.4.4 Agriculture	111
5.4.5 Tourism, Historical-cultural monuments.....	112

5.4.6 Infrastructure	112
6. METHODS, APPROACHES AND EVALUATION CRITERIA USED TO	113
ASSESS THE ENVIRONMENTAL IMPACT.....	113
6.1 Introduction	113
6.2 Assessment criteria of the impact on the atmospheric air quality	115
6.3 Noise and vibration propagation – Impact Assessment Criteria.....	116
6.4 Assessment criteria of the expected impact on water	118
6.5 Assessment criteria of the expected impact on the soil.....	119
6.6 Assessment criteria of the expected impact on the geological environment	120
6.7 Assessment criteria of the expected impact on the biological environment	121
6.8 Assessment criteria of the expected impact on the visual-landscape environment	122
6.9 Social Impact Assessment Criteria.....	123
6.10 Assessment criteria of the expected impact on the historical-cultural monuments	125
7. DESCRIPTION OF THE PROJECT ENVIRONMENTAL IMPACT AND ASSESSING THE IMPACT VALUE	126
7.1 Impact on atmospheric air quality – emissions in the construction and operation phases.....	127
7.1.1 Construction Phase	127
7.1.1.1 Quantitative calculations of the emission (emissions of harmful substances) in the atmospheric air for the construction camp	127
7.1.1.2 Emission calculations	141
7.1.2 Exploitation phase.....	146
7.1.3 Impact mitigation measures	146
7.2 Noise and vibration propagation	147
7.3 Noise level standards.....	147
7.3.1 Noise sources, noise modeling methods	147
7.3.2 Present situation	150
7.3.3 Construction phase.....	150
7.3.3.1 Construction Camp	151
7.3.3.2 Construction corridor	151
7.3.4 Mitigation Measures	152
7.3.4.1 Mitigation at a noise source.....	152
7.3.4.2 Mitigation Along the Path.....	153
7.3.4.3 Mitigation at the existing receptors	153
7.3.4.4 Training Programs for Contractors	153
7.3.5 Operation phase	153
7.4 Changes in the geological environment and expected impacts on the geological environment.....	160
7.4.1 Construction Phase	160

7.4.2 Operation phase	163
7.4.3 Impact mitigation measures	163
7.5 Impact on water environment	163
7.5.1 Construction phase	164
7.5.2 Operation phase	165
7.5.3 Impact mitigation measures	165
7.6 Impact on soil productivity and quality	166
7.6.1 Construction works.....	166
7.6.2 Operation phase	167
7.6.3 Mitigation measures.....	168
7.7 Impact on biological environment	168
7.7.1 Loss and fragmentation of habitats	169
7.7.1.1 Construction Phase	169
7.7.1.2 Operation phase	171
7.7.1.3 Impact mitigation measures	171
7.7.2 Impact on vegetation cover	172
7.7.2.1 Construction phase	172
7.7.2.2 Operation phase	172
7.7.2.3 Impact mitigation measures	172
7.7.3 Direct and indirect impact on fauna	173
7.7.3.1 Operation phase	173
7.7.3.2 Operation phase	173
7.7.3.3 Impact Mitigation Measures	174
7.7.4 Potential Impacts of Climate Change Upon the Project	174
7.8 Visual-landscape changes	185
7.8.1 Construction Phase	185
7.8.2 Operation phase	185
7.8.3 Impact mitigation measures	185
7.9 Waste	186
7.10 Impact on social-economic environemnt	186
7.10.1 Resettlement and impact on private business	186
7.10.2 Impact on agriculture	189
7.10.3 Eemporal obstruction of traffic	189
7.10.4 Expected impact on local infrastructure	189
7.10.5 Human health and safety	190
7.10.6 Positive social-economic impact	190

7.11 Risks of impact on the historical and archeological monuments	190
7.11.1 Mitigation Measures	191
7.12 Information about the possible transboundary impact.....	191
7.13 Cumulative Impact.....	192
7.14 Residual impact.....	193
7.15 Summary table of the expected environmental impacts.....	192
8. ENVIRONMENTAL MANAGEMENT PLAN	194
8.1 Introduction	194
8.2 Environmental Documents and Records	195
8.3 Costs of ESMP Implementation	195
8.4 Environmental management plan (EMP) - Planning stage of building organization	196
8.5 Environmental management plan (EMP) - Construction phase	197
8.6 Environmental management plan (EMP) - Exploitation phase.....	209
9. ENVIRONMENTAL MONITORING PLAN	212
9.1 Introduction	212
9.2 Environmental monitoring plan in the construction phase	213
9.3 Environmental Monitoring Plan – Operation Phase	223
10. PUBLIC CONSULTATION AND GRIEVANCE REDRESS MECHANISM	220
10.1 Information disclosure and andpublic consultations	220
10.2 Grievance Redress Mechanism	225
10.3 Grievance Redress Procedures	228
10.4 Grievance Log	229
11. CONCLUSIONS	230
12. REFERENCE	233
13. ANNEXES	235
13.1 Annex 1. Responses to the questions specified by scoping opinion of the Ministry of Environment Protection and Agriculture of Georgia	235
13.2 Annex 2. Engineering-geological sections.....	241
13.3 Annex 3. Comparative values of expected impact along the different sections of the design corridor	253
13.4 Annex 4. Software print of calculation of emissions of harmful substances into the atmospheric air in the construction phase	260
13.5 Annex 5. Taxation list of timber resources	319
13.6 Annex 6. Waste Management Plan.....	323
13.7 Annex 7. Emergency Response Plan	291
13.8 Appendix 7 Results of Noise Modeling: Existing, Construction and Operation.....	302
Stages (2020 and 2025)	302

1 INTRODUCTION

One of the most important components of the economic policy of the Government of Georgia is the implementation of strategically important infrastructural projects and upgrading and development of the road network. This priority is shown in a 4-point Reform Plan developed by the government recently. The priority objective of the spatial development under the Plan is the International East-West E-60 Highway Improvement Project what will significantly promote the establishment of Georgia as a regional transport and logistics center.

Consequently, the Georgian Government, assisted by the international organizations, started to implement the program envisaging the improvement and upgrading of the main roads in Georgia. This program is controlled by the Roads Department of the Ministry of Regional Development and Infrastructure of Georgia.

The present document is about Sadakhlo-Algeti Road Section under East-West E-60 Highway Improvement Project. The Road connects Georgia with Armenian and is also an important connecting chain to Europe across the Black Sea and Central Asia across the Caspian Sea. Following its great importance, the upgrading of the said Road is more than merely an ordinary infrastructural project.

The present environment scoping report was developed by “Eco-Spectri” Ltd. for the Roads Department of the Ministry of Regional Development and Infrastructure of Georgia. See the Table 1 below for the contact information.

Table 1. Contact Information

Implementing agency:	Roads Department
Legal address:	#12, A. Kazbegi Ave., Tbilisi 0160, Georgia
Implementation location:	Marneuli Municipality
Type of activity:	Upgrading Sadakhlo Algeti section of E-60 Highway
Chairman of the Roads Department of Georgia:	Irakli Karseladze
Contact person:	Gia Sopadze
Tel:	+995 599 939209
E-mail:	Gia.sopadze@georoad.ge
Consultation Company:	“Eco-Spectri” Ltd.
Director of “Eco-Spectri” Ltd.:	Irakli Kaviladze
Tel:	+995 599 979748; +995 322 904422

Legislative basis and goals of the document development:

The procedures to provide an Environmental Impact Assessment (EIA), make relevant environmental decisions and for public participation and expertise during the implementation of various kinds of activities in Georgia are regulated in line with the requirements of the Environmental Assessment Code, the Georgian law adopted on June 1, 2017. The activities of different contents are prescribed in the I and II Annexes to the Code. The activities provided for by Annex I are subject to the EIA procedures, while those in Annex II must be subject to the screening procedure thus necessitating the EIA procedure.

The project to consider in the present document is among the activities under the I Annex:

- Clause 11. Construction of motor roads of international or intrastate significance.
- Clause 12. Reconstruction and/or modernization of motor roads the entire section of which is 5 km or more in length.
- Clause 13. Construction of tunnels and/or bridges located on the motor roads of international or intrastate significance.

Following the above-mentioned, the project is definitely subject to the EIA procedure.

The main stages of the EIA are given in Article 6 of the Code, suggesting that at the initial stage, a scoping procedure is necessary. As the Code defines, scoping is the procedure, which determines the list of the information needed to obtain and study for the EIA purposes and means to reflect this information in the EIA Report. Following the said requirements, the project Scoping Report was developed and submitted to the Ministry of Environmental Protection and Agriculture of Georgia.

In line with the requirements of the Code, the Ministry held the public hearing of the Scoping Report. Based on the scoping report, scoping opinion №10 30.01.2019 was issued, which gives the list of studies and information to obtain and study as necessary for the EIA Report development.

The responses to the issues envisaged by the Scoping Opinion of the Ministry of Environment Protection and Agriculture of Georgia are given in Annex 1.

Following the above-listed procedures, the present EIA Report was developed. As the Code explains, the EIA Report is a procedure to identify and study possible environmental impact based on relevant studies for the planned activity, which may have a significant impact on the environment. The purpose of an EIA is to identify, study and describe direct and indirect impacts resulting from the planned activities on the following factors:

- human health and safety;
- biodiversity (including species of plant and animals species, habitats);
- water, air, soil, land, climate and landscape;
- cultural heritage and material assets, and
- any interaction between the factors provided for above.

The present EIA Report was developed in line with Article 10 of the Law of Georgia On „Environmental Assessment Code“. Based on the EIA Report, the Ministry of Environment protection and Agriculture of Georgia issue an environmental decision, what is the necessary precondition for implementing the activity in question.

2. LEGISLATION AND NORMATIVE ACTS EFFECTIVE IN THE FIELD OF ENVIRONMENTAL PROTECTION AND ASSOCIATED WITH THE PLANNED ACTIVITY

Under Article 37 of the Constitution of Georgia, all citizens of Georgia have the right to live in harmless environment and to have use of the natural and cultural environment. Everyone is obliged to take care of the natural and cultural environment. The state, by considering the interests of the present and future generations, ensures environmental protection and rational use of natural resources, sustainable development of the country to provide the environment safe for human health in line with the public economic and environmental interests.

The basis for the environmental legislative and normative documents effective in Georgia is the Law of Georgia “On Environmental Protection”. The Law regulates the legal relations between the state authorities and the physical and legal entities in the field of environmental protection and nature use on the whole territory of Georgia, including its territorial waters, air space, continental shelf and economic zone in particular.

Following the requirements of the above-mentioned Laws, a number of by-laws and normative documents are in force in Georgia, which regulate the legal relations in the field of environmental protection (the list of the legislative and normative documents is given in Tables 2.1 and 2.2).

Table 2.1. List of Environmental Laws of Georgia

Year	Final version	Law	Registration Code
1994	14/06/2011	Georgian Law on Soil Protection	370.010.000.05.001.000.080
1996	06/09/2013	Georgian Law Environmental Protection	360.000.000.05.001.000.184
1997	06/09/2013	Law of Georgia on Wildlife	410.000.000.05.001.000.186
1997	06/09/2013	Law of Georgia on Water	400.000.000.05.001.000.253
1999	05/02/2014	Law of Georgia on the Protection of Atmospheric Air	420.000.000.05.001.000.595
1999	06/09/2013	Forest Code of Georgia	390.000.000.05.001.000.599
1999	06/06/2003	Law of Georgia on Compensation for Harm Caused by Hazardous Substances	040.160.050.05.001.000.671
2003	06/09/2013	Law of Georgia on Red List and Red Book of Georgia	360.060.000.05.001.001.297
2003	19/04/2013	Law of Georgia on the Conservation of Soils and Restoration and Improvement of Their Fertility	370.010.000.05.001.001.274
2005	20/02/2014	Law of Georgia Licenses and Permits	300.310.000.05.001.001.914
2007	25/03/2013	Law of Georgia on Ecological Examination	360.130.000.05.001.003.079
2007	06/02/2014	Law of Georgia on Environmental Permit	360.160.000.05.001.003.078
2007	13/12/2013	Law of Georgia on Public Health	470.000.000.05.001.002.920
2007	25/09/2013	Law of Georgia on Cultural Heritage	450.030.000.05.001.002.815
2007	03/06/2016	The Law of Georgia on Rules for Expropriation of Ownership for Necessary Public Needs	370.060.000.05.001.003.003

2008	06/09/2013	The Law of Georgia on Rules for Expropriation of Ownership for Necessary Public Needs	020.060.040.05.001.000.670
2014	01/07/2014	Law of Georgia on Civil Security	140070000.05.001.017468
2014	01/06/2017	Waste Management Code	360160000.05.001.017608
2017	05/07/2018	Environmental Assessment Code	360160000.05.001.018492

Table 2.2. Major environmental protection normative documents

Adopted on:	Name of the Normative Document	Registration code
15/05/2013	Decree #31 of the Minister of Environment and Natural Resources of Georgia "On Approving the Provision on Environmental Impact Assessment".	360160000.22.023.016156
31/12/2013	<u>Decree №425 of the Government of Georgia</u> Technical Regulation – "Protection of Surface Water Contamination".	300160070.10.003.017650
31/12/2013	<u>Decree №435 of the Government of Georgia</u> Technical Regulation – "Methods of calculating the actual amount of emissions according to instrumental methods for determining the actual amount of emissions in ambient air from stationary sources of pollution, list of special measuring and controlling equipment for determining the actual amount of emissions in ambient air from stationary sources of pollution and technological processes from stationary pollution sources".	300160070.10.003.017660
31/12/2013	Decree №408 of the Government of Georgia. Technical Regulation – "Methods of calculation of maximum permissible emission of hazardous substances into ambient air"	300160070.10.003.017622
31/12/2013	<u>Decree №415 of the Government of Georgia</u> Technical Regulation - provisions on "Determining Levels of Soil Fertility" and "Soil Conservation and Fertility Monitoring".	300160070.10.003.017618
31/12/2013	Decree №424 of the Government of Georgia Technical Regulation – on "Topsoil Removal, Storage, Use and Cultivation".	300160070.10.003.017647
03/01/2014	<u>Technical Regulation</u> – "Operation of Dust-Trapping Devices approved by Decree №21 of the Government of Georgia.	300160070.10.003.017590
03/01/2014	<u>Technical Regulation</u> - "Radiation safety standards within the territory of Georgia", approved by the Decree №28 of the Government of Georgia.	300160070.10.003.017585
03/01/2014	<u>Decree №8 of the Government of Georgia</u> Technical Regulation - "The unfavorable weather conditions for Protection of Environment".	300160070.10.003.017603
03/01/2014	<u>Decree №17 of the Government of Georgia</u> Environmental Technical Regulation.	300160070.10.003.017608
06/01/2014	Decree №42 of the Government of Georgia. Technical Regulation - "Method for inventory of Stationary Sources of Air Pollution"	300160070.10.003.017588

14/01/2014	<u>Decree №54 of the Government of Georgia</u> Technical Regulation - "Environmental Damage Determination (calculation) Method".	300160070.10.003.017673
15/01/2014	Decree №65 of the Government of Georgia. Technical Regulation – “On safe exploitation of oil depots”	300160070.10.003.017683
15/01/2014	<u>Order №70 of the Government of Georgia</u> Technical Regulation – “Maximum Allowed Concentrations of harmful substances at work places”.	300160070.10.003.017688
17/02/2015	<u>Decree №61 of the Government of Georgia</u> „The rule of implementation of state control by the Environmental Supervision Department of subdivision agency of the Ministry of Environment and Natural Resources Protection of Georgia”.	040030000.10.003.018446
04/08/2015	<u>Decree №211 of the Minister of Environment and Natural Resources Protection of Georgia</u> Technical Regulation - "Rules of reviewing and coordinating the company's waste management plan".	360160000.22.023.016334
11/08/2015	<u>Decree №422 of the Government of Georgia</u> on "Waste Recording, Form and Content."	360100000.10.003.018808
17/08/2015	<u>Decree №426 of the Government of Georgia.</u> Technical regulation “On Determination and classification of the list of waste according to their types and characteristics”.	300230000.10.003.018812
01/04/2016	Technical Regulation - <u>Decree №159 of the Government of Georgia</u> “On the rule for the collection and treatment of municipal waste”.	300160070.10.003.019224
29/03/2016	<u>Decree №144 of the Government of Georgia</u> “On the rule and terms of registration of the collection, storage, transportation, pretreatment and temporal disposal of waste”.	360160000.10.003.019209
29/03/2016	<u>Decree №145 of the Government of Georgia</u> Technical regulation “On special requirements for the collection and treatment of hazardous waste”.	360160000.10.003.019210
29/03/2016	<u>Decree №143 of the Government of Georgia</u> Technical Regulation “On approving the rule of waste transportation”.	300160070.10.003.019208
01/04/2016	<u>Decree #160 of the Government of Georgia</u> „On approving the waste management national strategy for waste management of 2016-2030 and national action plan of 2016-2020”	360160000.10.003.019225

3. ANALYSIS OF ALTERNATIVE OPTIONS

East-West E-60 Highway Improvement Project project envisages construction of new four-lane highway from Rustavi ((auto market) to Georgia-Armenia state border (Sadakhlo Border Crossing Point).The project road corridor will pass through two self-governing units: City of Rustavi and Municipality of Marneuli. However, as noted in the introductory section, in this document we will discuss only the section passing through the Marneuli municipality area, starting from Sadakhlo Road Junction planned to the East of Azizkedi village to the Sadakhlo Border Checkpoint (Algeti Sadakhlo section).

This is because the initial section (from the city of Rustavi to Algeti) is described in a separately developed EIA Report and the Environmental Permit to it is issued separately.

Within the scope of the EIA, various alternative options of the project were considered, including non-project (no action) alternative and alternative routes of the road corridor.

3.1 Non-project alternative – substantiation of the project need

Presently, the traffic from the capital of Georgia and E60 Highway to Sadakhlo border checkpoint is possible along Tbilisi-Marneuli-Guguti and Marneuli-Sadakhlo International Roads. The road traffic intensity at the Armenian border is 3000 vehicles a day.

When analyzing no-action alternative, attention must be paid to the option of free movement of within the highway: in various fields (including tourism, trade, etc.) on the background of successful cooperation between Georgia and Armenia the demand for exploiting the given section of E-60 road main (See the following sub-chapter – “Results of the study of vehicle flows”). The existing situation and forecasted data increase the risks associated with traffic safety and prolongs the travel time. Increased traffic flows due to insufficient road sizes, has a negative impact on the living conditions of the local population (the action of disturbing factors, such as noise, dust, etc. increases). In the future, simultaneously with the increased traffic flows 9what is quite possible in case of realization of such announced tourism development projects, as the construction of Anaklia Deep Sea Port, etc.), the situation described above is expected to aggravate further.

At the same time, it must be said that no-action alternative will fiercely decrease the positive social-economic effect gained at the expense of modernized sections of the E-60 highway and will have a negative impact on the expectations of the country population and businesses.

The goal of East-west E-60 highway improvement project, including Rustavi-Red Bridge section is to reduce the cost of transportation of the existing roads and give the opportunities for sustainable growth of the road network. The economic development brought by the existing road is in compliance with the long-term development strategy of the Government of Georgia.

The improvement of the state of the road will support the economic development. Reduced costs of transportation and/or improved access to them ensure high competence for the economic activity in the region:

- Field of road service: the improvement of the state of the road may result from an increase traffic intensity what will increase the local incomes of the roadside businesses, such as gas fueling station, hotels, restaurants, etc.
- Tourism: similarly, the road improvement will result in the increased number of tourists interested in the region what will increase the incomes and general well-being in the region;
- Social benefit: by improving the state of the road, the access to health, education, cultural improvement and other social needs may increase;
- Employment: local population will be engaged in the construction works what will have a positive impact on their incomes.

Following the above-mentioned, it may be said that the modernization project of E-60 highway will significantly support the sustainable development of the country. The reduction of the scales and area of the expected negative impacts on the environment caused by the implementation of the project will be possible by taking relevant compensation and mitigation measures.


3.1.1 Results of Traffic Survey

The study of traffic flows was accomplished at the stage of the feasibility study of the project. The vehicles were counted in April of 2017, near Rustavi, Red Bridge and Algeti. Future trade potential of the project are and generated traffic estimates were modeled in HDM-4 during the feasibility study.

The results of the vehicle count and predicted traffic volumes are shown for 2040, 2050 in Table 3.1.1.1.

Table 3.1.1.1. Results of Traffic Survey

Year	Destination	Average number of vehicles a day						
		Motorcycle	car	Minibus	Large bus	Small truck	Truck	Total
2017	Algeti	0	2235	199	30	301	577	3342
	Sadakhlo	0	2767	103	46	125	271	3312
2040	Algeti	4	24600	3300	300	3900	5700	37800
	Sadakhlo	0	9800	400	200	500	1700	12500
2050	Algeti	5	28900	3900	300	4500	6400	44000
	Sadakhlo	0	11500	400	200	600	1900	14600

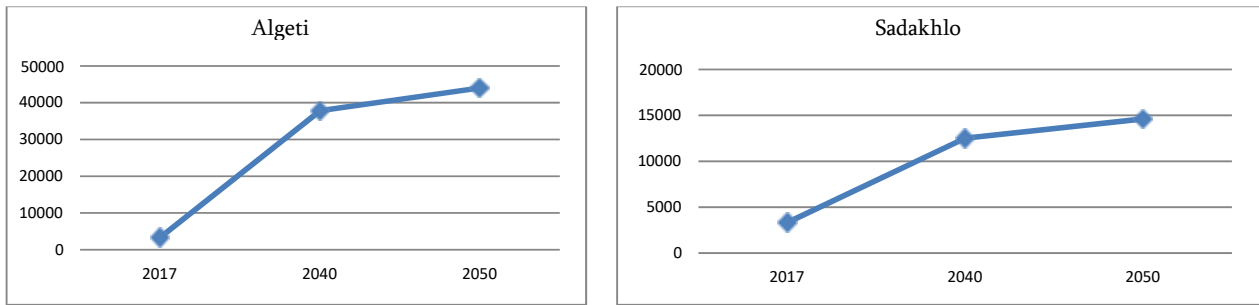

3.2 Alternative corridors of the highway


Within the scope of the feasibility study, four technically realizable and financially more or less beneficial alternative corridors were considered:

- Alternative 0 – widening of the existing road;
- Alternative 1 – the so called Red Alternative;
- Alternative 2 – the so called Blue Alternative;
- Alternative 3 – the so called Green Alternative.

All three alternatives are marked on the drawing 3.2.1. In the following paragraphs, there is a comparative analysis of alternative corridors from financial-economic and environmental point of view.

In addition, in this scoping report, we will consider additional alternative options specified in the intermediate phase of the project process, concerning a slight adjustment of the middle section of the corridor of the second alternative (blue).

Figure 3.2.1. Alternatives of the highway alignment

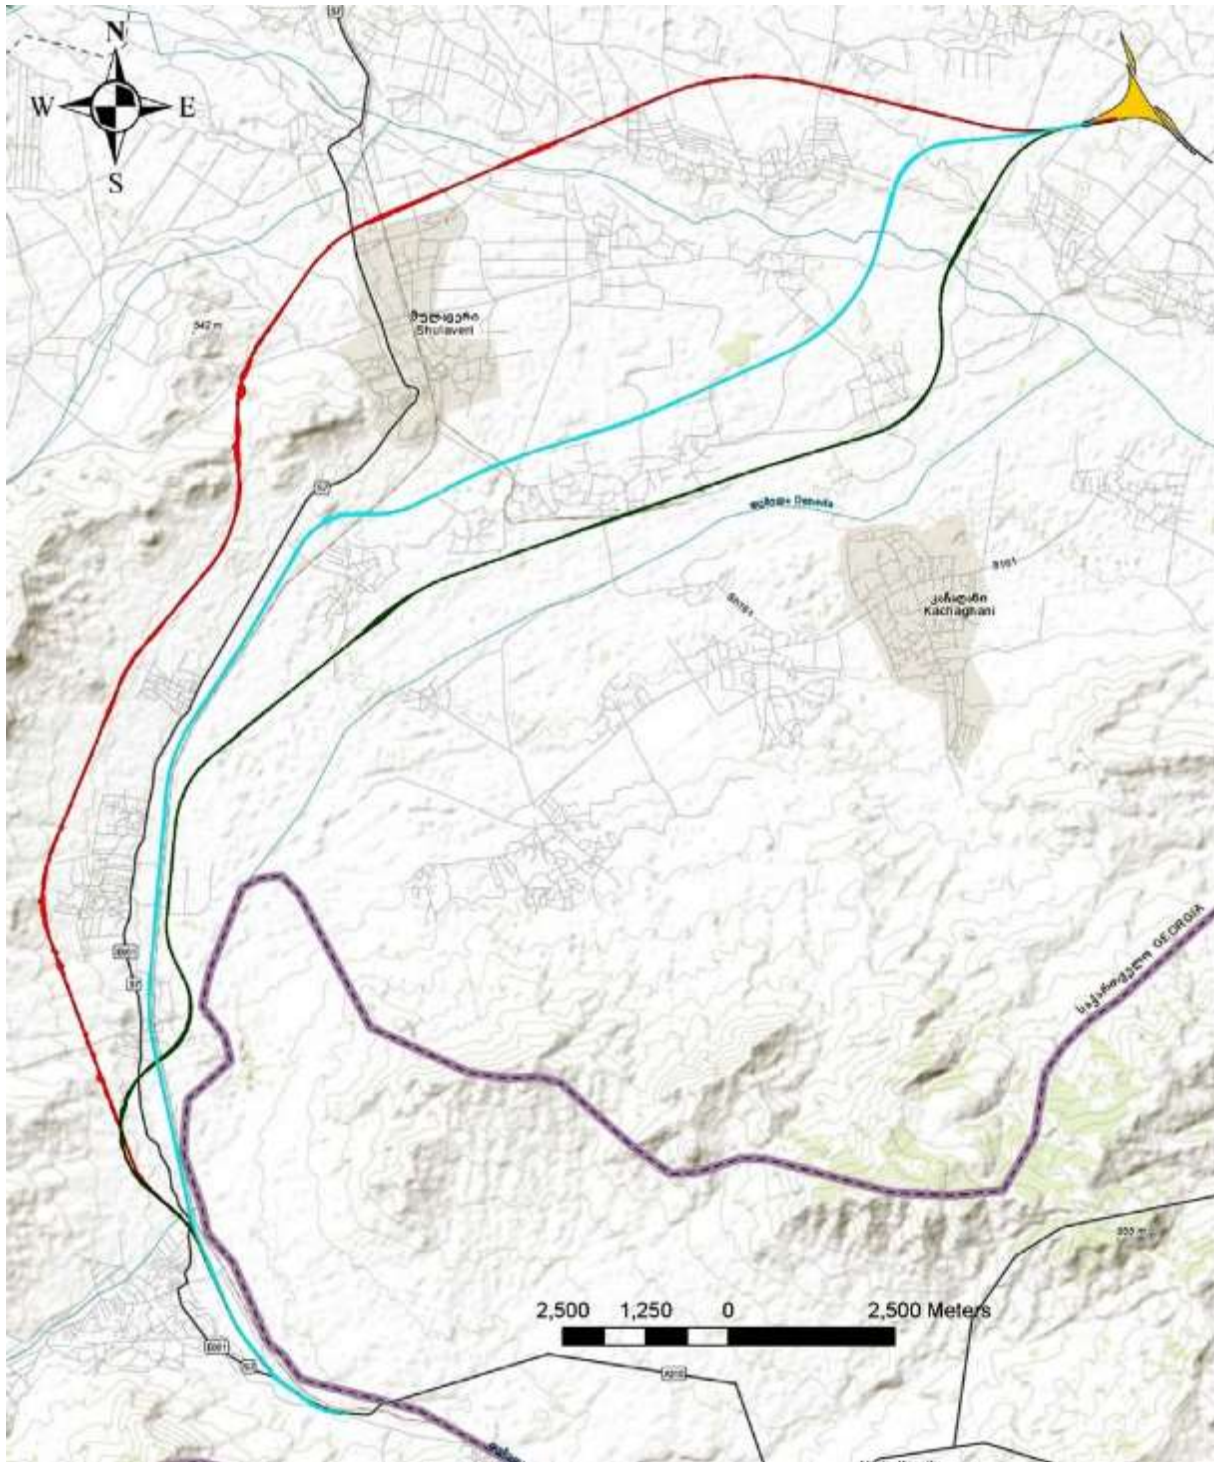

3.2.1 Alternative 0 – widening the existing road

An alternative of expanding the existing road was rejected right at the initial stages of the feasibility study, the reason for which was named a number of insuperable barriers.

At present, movement from the capital of Georgia (from E60 highway) to the Sadakhlo border crossing point is possible through Tbilisi-Marneuli-Guguti and international Marneuli-Sadakhlo highways. Alternative of widening the existing road can be considered for this route, which is about 80 km long section. Accordingly, "Alternatives 0 - widening of the existing road" is about 30

km longer than the new corridor planned from Rustavi, and if we consider that the proposed road to the Red Bridge can be constructed independently, the difference is 50 km. It is obvious that the alternative of widening the existing road is unacceptable in terms of route length - operation costs will be higher compared to other discussed alternative options.

In addition, nonlinear route of the existing road shall be taken into consideration, in particular, it makes sharp turning at several points. Such a route could not ensure the realization of the expected major benefits (reduction of transportation time and distance, transportation security, etc.) of the project. During the design process, it will be virtually impossible to meet the TEM standards, which was probably the main reason for neglecting this alternative option at the stage of feasibility study.

Significant socio-economic and environmental deficiencies were also revealed. It is noteworthy that the corridor will pass through the centers of such densely populated villages, such as Koda, Imiri, Damia-Giarurarkhi, etc. Most importantly, it crossed the City of Marneuli and practically it will be necessary to design its bypass road. Because of these circumstances, the alternative option will be related to dozens of physical resettlements.

The proximity of residential houses increases the impact of the noise and emissions on the local population (at both stages of the project). In this regard, especially at the operation stage, it will be necessary to take expensive mitigation measures (arrangement of noise barriers). Risks associated with safety of the population and the scale of visual-landscape impacts will be increased.

Taking into consideration the above circumstances, it is clear that the widening of the road is unacceptable. It is advisable to select a new corridor that will be away from sensitive objects (in this case residential zones) as far as possible. In addition, the technical parameters established by the international standards for the highways will be provided and the expected benefit will be achieved at maximum level.

3.2.2 Alternate of the New Corridor of the Highway

As it was already mentioned above, 3 alternative options of a new corridor of the highway have been discussed. Alternative options: Alternative 1 - the so called Red Alternative; Alternative 2 - the so called Blue Alternative; and Alternative 3 - the so called Green Alternative. All three alternatives start from the Sadakhlo Road Junction of the planned Rustavi-Red Bridge Road and ends at the Sadakhlo border crossing point.

Sadakhlo Road Junction will be arranged between Azizkenda and Didi Mughanlo villages, on agricultural lands (Coordinates: X – 497370; Y – 4583775). From the road junction, all three alternatives continue to the West (see Picture 3.2.2.1.).



Picture 3.2.2.1. Sadakhlo Road Junction and initial section of the road corridor

After about 1 km from Sadakhlo Road Junction, the Green Alternative passes to the south, crosses the River Khrami, passes in the vicinity of Didi Mughanlo village and passes around Kirikhlo village from the East and South. Then, the road route continues through the groves and agricultural lands along the left bank of Debeda River. It should be noted that the alternative corridor crosses the railway near Mamaisi village.

After about 2.5 km from Sadakhlo Road Junction, the Red and Blue Alternatives have different directions. The first one turns to the right, it passes around Kultlari and Baidari villages from the north, then crosses Khrami River and Marneuli-Sadakhlo International road between Shulaveri and Imiri villages. The next route is directed to the south - it passes through the villages of Zemo Sarali, Damia-Giarurarkhi, hilly terrain conditions to the west of Kirovka, as well as on agricultural lands.

The blue alternative turns to the left and crosses Khrami River (see Picture 3.2.2.2.). Farther, the route continues on the agricultural lands between the villages of Kulari and Kirikhlo (see Pictures 3.2.2.3.) to the village of Kvemo Sarali. After that the route turns to the south.



Picture3.2.2.2. Project corridor, Khrami River crossing section



Picture 3.2.2.3. Project corridor to Kvemo Sarali village

From Kvemo Sarali village, the Blue Alternative passes to the east of the existing road, almost parallel to it. The corridor covers agricultural lands and partially the left grove of Debeda River (see Pictures 3.2.2.4.).

Alternate corridors join each other to the East of Sadakhlo village and about 3 km long ending section is identical for all three options. This section passes on agricultural lands of Sadakhlo village and partially it envisages the widening of the existing road. The corridor ends at Sadakhlo Border Checkpoint (see Pictures 3.2.2.5.).



Picture 3.2.2.4. Project Corridor from Kvemo Sarali village to Sadakhlo



Piicture 3.2.2.5. Project Corridor From the village Sadakhlo to the last point

3.2.2.1 Comparative Analysis of Alternatives

From feasibility point of view:

In the next table, there is a comparison between proposed alternatives according to their basic

geometric parameters. Comparison is made for one design speed and for the typical cross sections, so the number of lanes and other values are the same and is not shown in the table of comparison.

Table 3.2.2.1.1. Comparative table of technical specifications of alternate options

Element	Red Alternative	Blue Alternative	Green Alternative
Length, km	52,22	48.10	52.02
Min. horizontal radius, m	800	825	800
Min. Vertical radius, m	20000	20000	20000
Length of the section with slope, m			
3-4%	4955	6041	1410
4-5%	3296	-	-
5-6%	-	-	-
Number of big bridges	7	5	8
Capacity of the cross section, m ³	8876970	4675060	7503580
Capacity of embankment, m ³	4115363	2885955	6652700
The difference between the cross section and embankment (potential waste rock, topsoil) m ³	4761607	1789105	850880

Note: The data is given for the entire length of the project road, from Rustavi to Sadakhlo check point.

The main disadvantage of Red Alternative is a long section with 4.83% slope. In the plain, the road mainly passes through the populated areas. By one big passage, the road crosses railway and national road, then goes up to the mountains to the west direction. The earth works are very important at this section. From the border of Armenia, the main line passes from the existing road to the west side. Geometric elements are acceptable.

The main disadvantage of Green Alternative is that after Azizkendi village, the corridor passes to the South direction, between the villages and Debeda River. Existing corridor is not enough for the highway. In this corridor there are industrial facilities, including greenhouse farms. The Green Alternative is approaching the railway line corridor and passes over it with big overpass.

Table 3.2.2.1.1. presents data for the entire length of the project road, from Rustavi to Sadakhlo check point. According to the feasibility study, advantage is given to Blue Alternative: it has very good horizontal and vertical geometric elements. Artificial structures in the layout are moderate. Alternative corridor passes through the lowland populated areas and will less likely affect the settlement and agricultural lands. Then, it crosses railway and continues to the border between the railway and existing national road.

From environmental point of view:

Some of the technical parameters discussed above also influence the environmental advantages and disadvantages of alternative options, such as: From Table 3.2.2.1., it is clear that less earth works will be required in case of Blue Alternative - this means that transport operations will be much less as well. Under conditions where local roads are often approaching the populated zones, this issue is important in terms of reducing noise propagation and emissions in ambient air. Although the volume of expected waste rock will be more compared to Green Alternative, the difference is due to the fact that Green Alternative requires arrangement of a large number of embankments, which cannot support its superiority. Furthermore, considering the relief of the area, finding appropriate areas for waste rock disposal will not be associated with significant difficulties. Reduction of earth works will also reduce the risk of impact on geological environment.

Blue Alternative is also the best option in terms of the impact on surface waters and aquatic inhabitants - compared to other options, it is less likely to reach surface water bodies. In the case of Red and Green Alternatives, these risks are high, first of all, for the construction of more bridges. In addition, the Green Alternative, almost the entire length, is very close to the riverbed. In case of Red Alternative, the proximity of the new Sadakhlo irrigation channel should be taken into consideration.

The green alternate corridor should be considered as the most unacceptable option in terms of the impact on biodiversity, since its large part passes through the fragments of the River Debeda floodplain forest. Although the floodplain forest is quite degraded and modified in this section, it is still considered a relatively sensitive ecosystem compared to other discussed options. Then comes the red alternate corridor, which is not distinguished by the value of biological components, but relatively sensitive to the blue variant.

Blue Alternative, which will mainly pass through agricultural lands in parallel with the existing road and railway line, will have less impact on vegetation cover and the habitat integrity. At the preliminary study phase, no significant difference was observed between alternatives in terms of impact on social environment (mainly, private land acquisition) and soil.

Overall, we can say that blue alternative is preferable compared to the other two alternatives. In addition to the geometric parameters the advantage of this alternative option is expressed in the reduced volume of construction works and in various environmental aspects, including the reduction of the length of the road by 4 km (considering the average width - 16 ha) and need to destroy existing land resources is less.

3.2.3 Additional Options of the Main Alternate Corridors

As already mentioned in the introductory section, there was a slight adjustment of the reviewed alternative options at the intermediate stage of the project development. Middle section of the main second alternative corridor (Blue) was slightly changed, namely, from km 8 to km 15 (7 km) from Algeti Junction. Alternative corridor is marked on the drawing 3.2.3.1.

Alternative 2a. This corridor was specified before the amendments have been made at the intermediate stage of the project development. It is mainly heading towards the south-west direction from the northeast, on the agricultural lands between Shulaveri and Araflo villages. The need to change the road corridor and the need for additional alternative was due to the fact that Alternative 2a was crossing two land plots where the following state significance projects are implemented:

1. Within the framework of the state program "Plant Future", the Partnership "Georgian Berries" received state funding in the amount of 53 305 GEL (as the owners say, several donors were also involved in the project and the total investment amount reached half a million GEL), within the framework of which raspberry bio-plantation is grown in Akhlomakhmudlu village of Marneuli Municipality. The plantation covers 7 ha area and the first harvest is planned for this year (cadastre code of the plot: 83.09.19.031);
2. The solar greenhouses, one-sided greenhouses and other auxiliary buildings will be constructed in the administrative unit of Shulaveri within the framework of the cooperation project between Georgia and China signed on 15 January 2014. Two types of demonstration area for vegetable production will be arranged. Georgian farmers and technicians will be trained in China. The total value of the project is 20 million yuan


(RMB). Greenhouse complex equipped with new technologies was constructed on the territory of 5 ha area owned by LEPL Agricultural Research Center (Cadastral code of the plot: 83.09.14.406).

Alternative 2b considers to maximally avoid the road corridor from the above mentioned land plots, in particular, shifting the starting section of the road to the north from 7 km long section under discussion, and moving the end section of the road to the south. As a result, the length of the corridor will increase slightly, but the above land plots will be no longer affected.

It is noteworthy that the existing background situation in the other sections of the modified corridor is similar in case of alternative 2a. The corridor runs on agricultural land plots. No sensitive sections are observed in terms of biodiversity (the section is almost free from tree-vegetation). The relief and geological environment is also stable and it is not necessary to take additional preventive measures in this regard. The only thing to consider is that the last section of the 7 km long section road is closer to residential houses of Araflo village, the distance is approximately 80m and more. Overall, preference is given an alternative option 2b, since it was determined that in this case the need for economic resettlement and appropriate excise measures will be less. At the same time, above discussed projects of state importance will be maintained.

Implementation of mitigation measures for the reduction of noise propagation and emission will ensure the reduction of impact on residential houses of Arafle village to the permissible level, especially given that the distance is not critical.

Figure 3.2.3.1. Layout scheme of additional alternatives(2a and 2b)

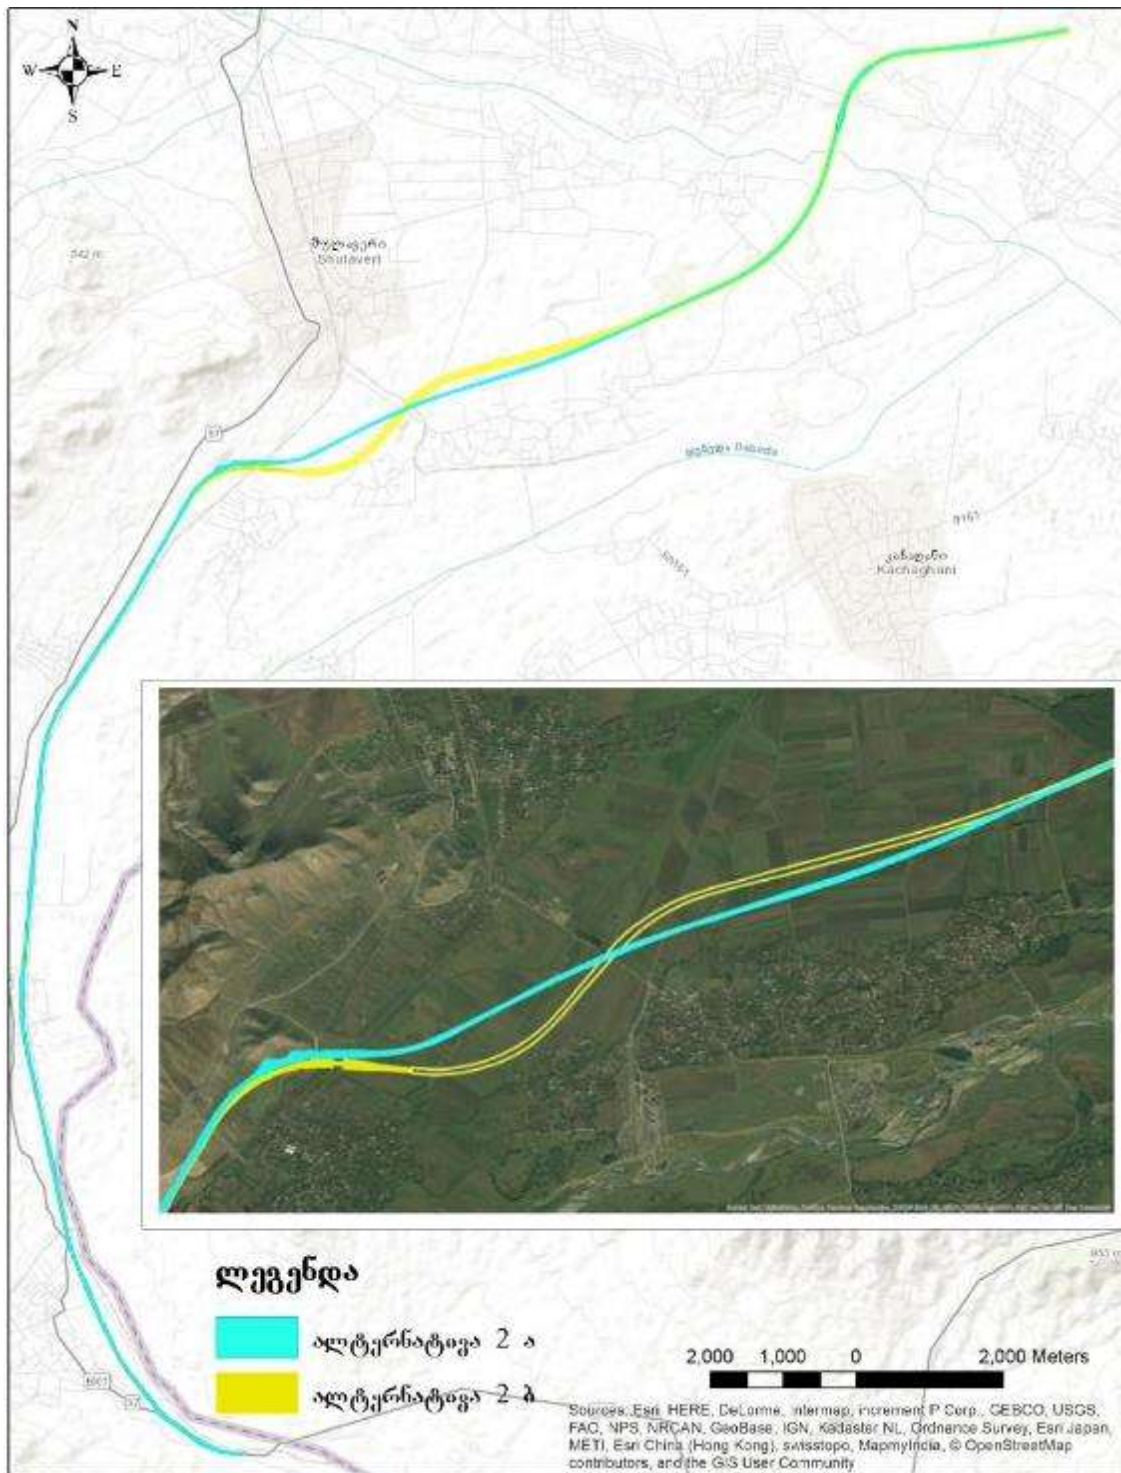

4. PROJECT DESCRIPTION

4.1 Introduction

Rustavi-Red Bridge and Rustavi-Sadakhlo Roads area motorway of an international importance with design speed of 120 kmph. The road project is prepared by company „M/s Antea Group“ in collaboration with local companies, in particular „Policy and Management Consulting Group“ (PMCG) and Ltd „Sakgzametsniereba“. In a technical respect, the project characteristics are as follows:

- Total length of the road – 30 km;
- The road configuration is constructed with the rigid pavement width of 22~ 25m average with hard shoulder;
- The drainage system of the road will be provided in the middle of the road section;
- The motorway is 4x3.75m width with hard shoulder of 2.5m wide;
- All in all, 4 viaducts will be provided within the scope of the project;
- 2 river bridges, 1 bridge across the railway line and 1 overpass bridge are planned to construct. The bridge span is 33m.

The road is design as per the accepted international standards such as Trans-European Motorway Standards, AASHTO, European standards.

In the process of designing, Rustavi-Red Bridge road is divided into two sections:

- Section 1 (Lot 3 within the scope of the project) – from Algeti to Mareti. The length of this section is 13 km. The section starts west of Algeti underpass and ends at Mareti, 400 m from the crossing point with Georgian-Armenian railway line;
- Section 2 (Lot 4) – from Mareti to Sadakhlo. The length of this section is 16,3 km. Lot 4 starts 400 m from the crossing point with Tbilisi-Armenian railway. After the crossing point, the road profile follows the railway from its right side.

The maps of both sections are given in Drawings 4.1.1. and 4.1.2. the Drawings show all principal project communications, while the general layout is given in Drawing 4.1.3. by showing the distances of the corridor from the population.

Drawing 4.1.1. General map of Algeti-Sadakhlo highway (Algeti –Mareti Section, 13km)

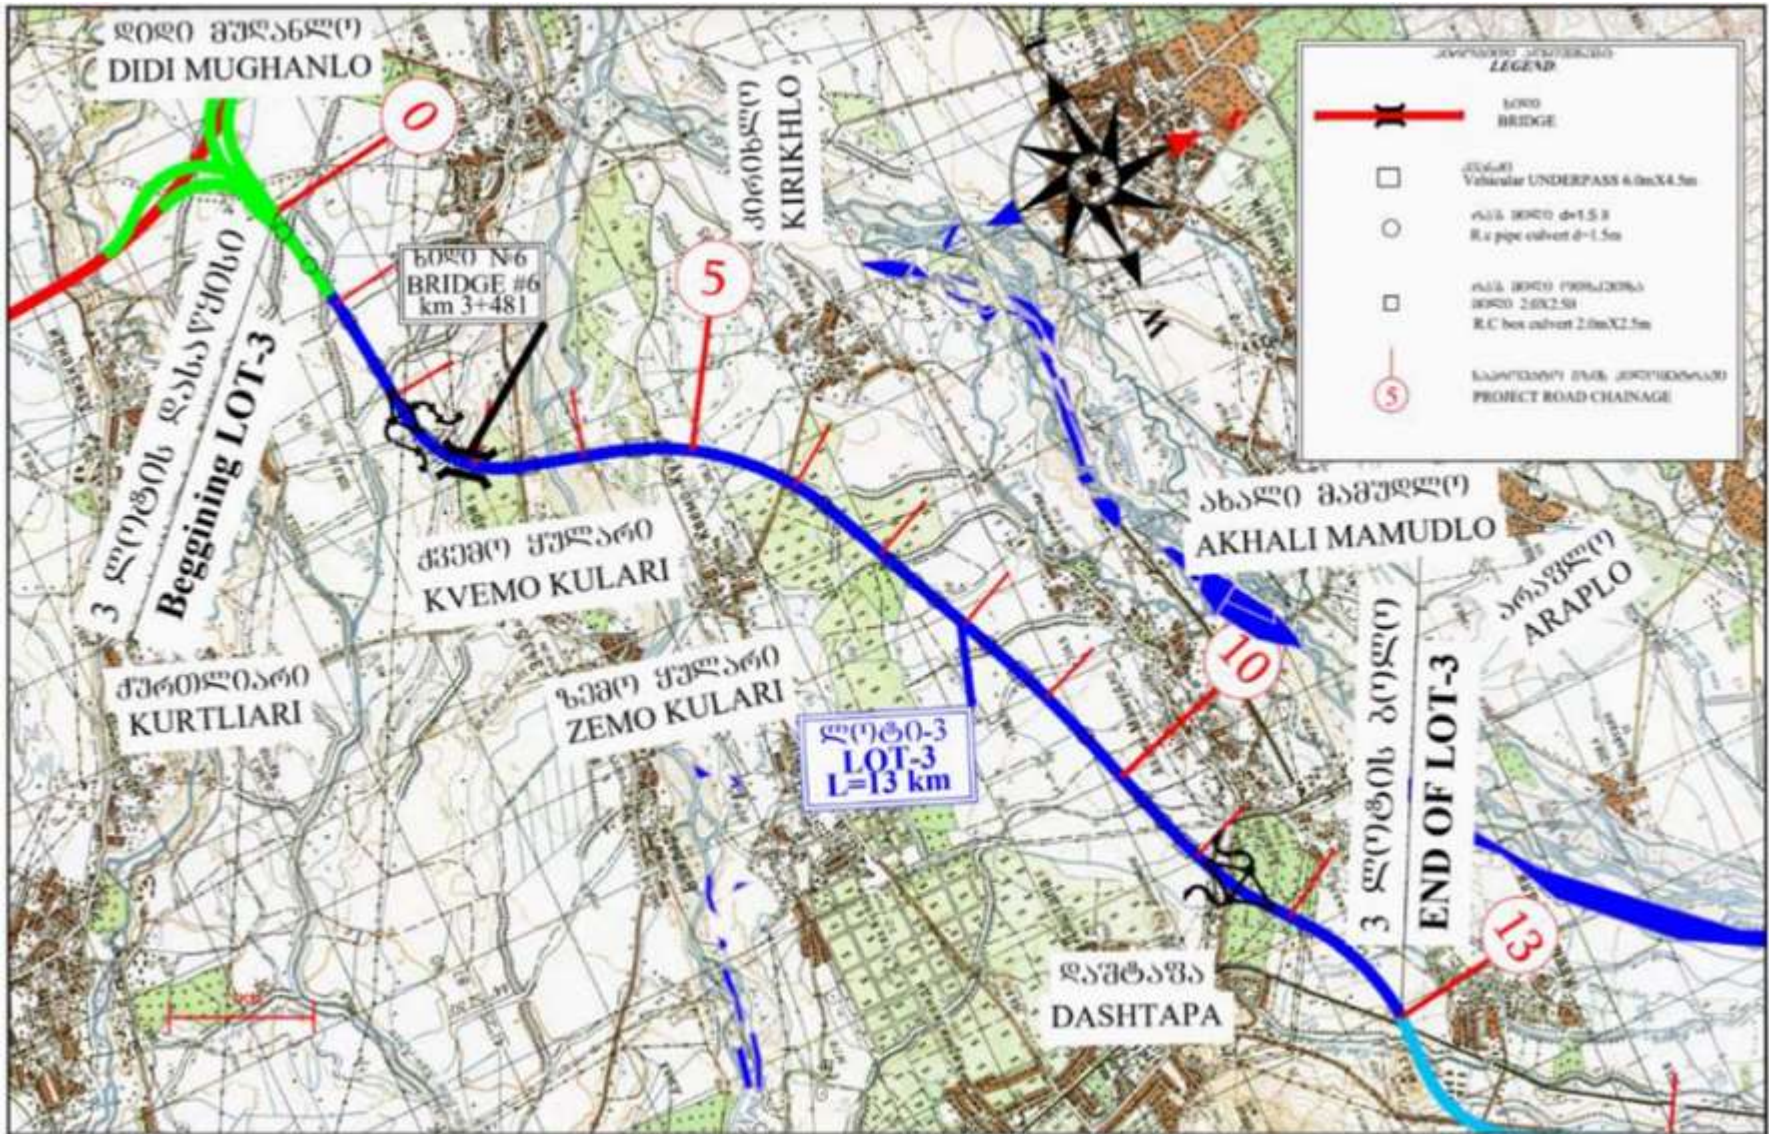


Figure 4.1.2. General Map of Algeti-Sadakhlo Highway (Materi-Sadakhlo Section, 16,3km)


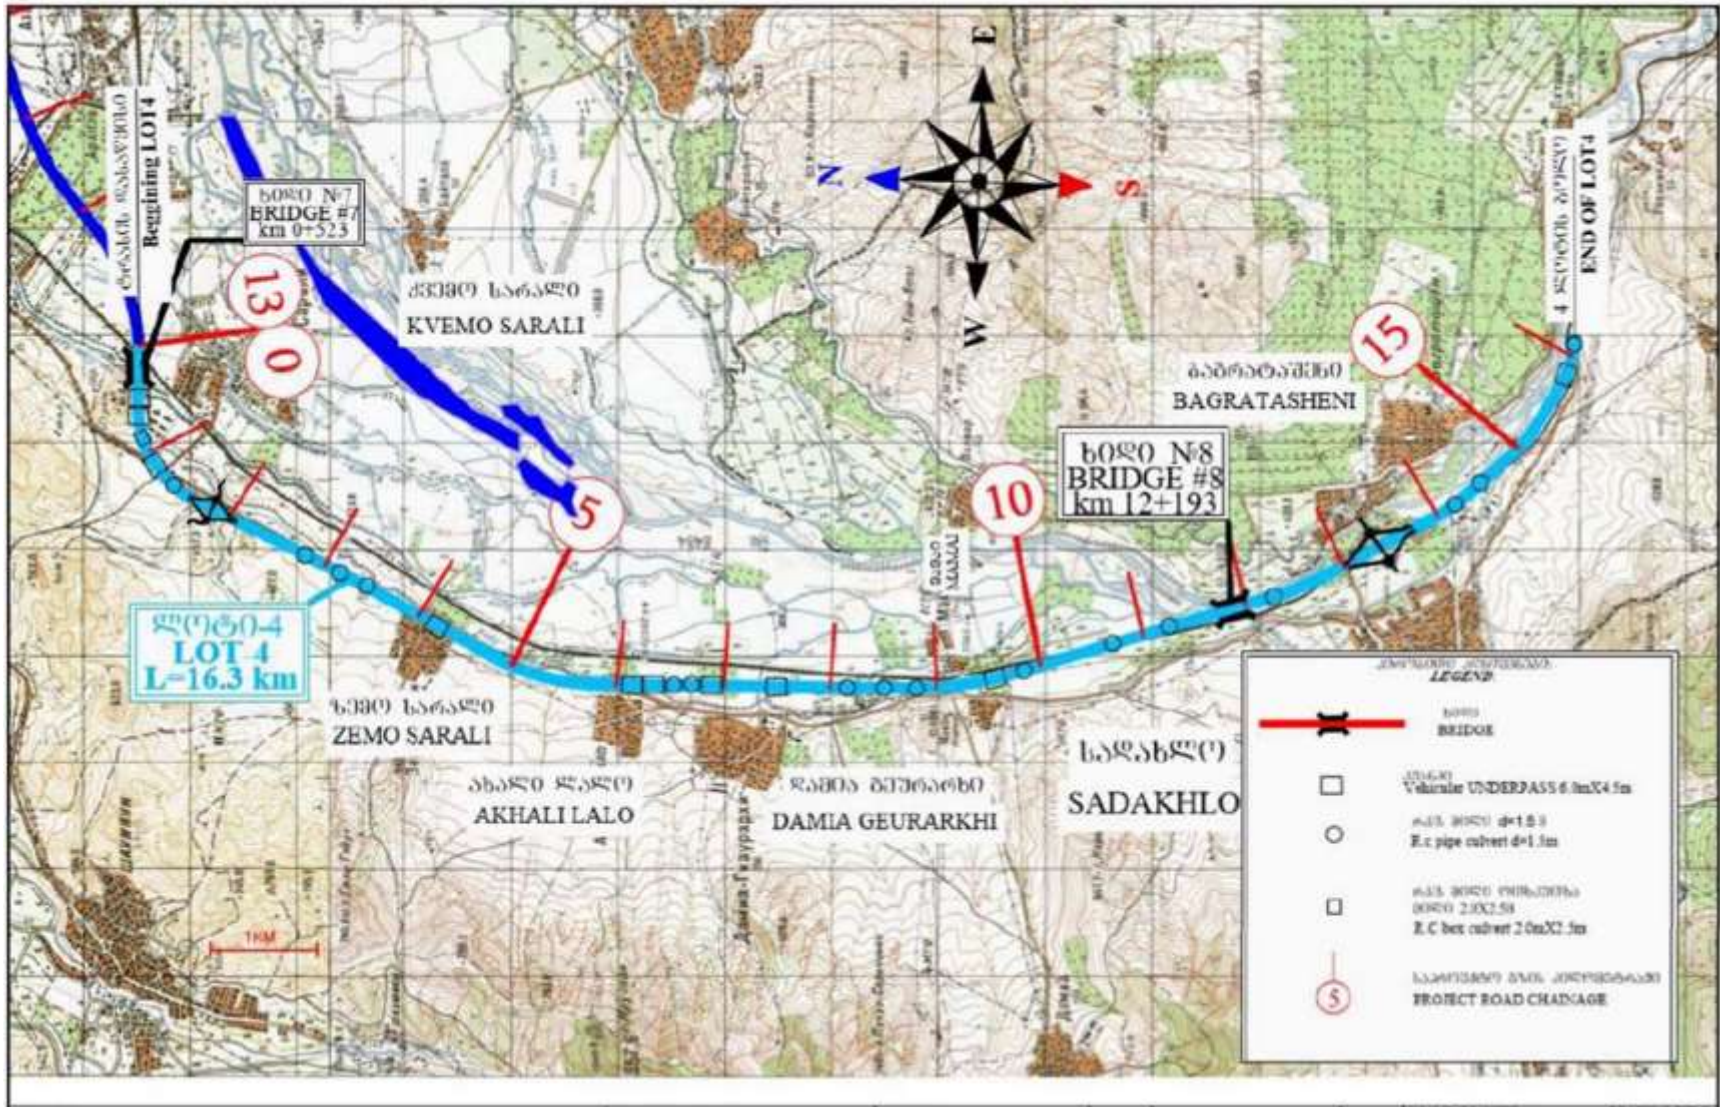


Figure 4.1.3. Layout of the Algeti-Sadakhlo Highway

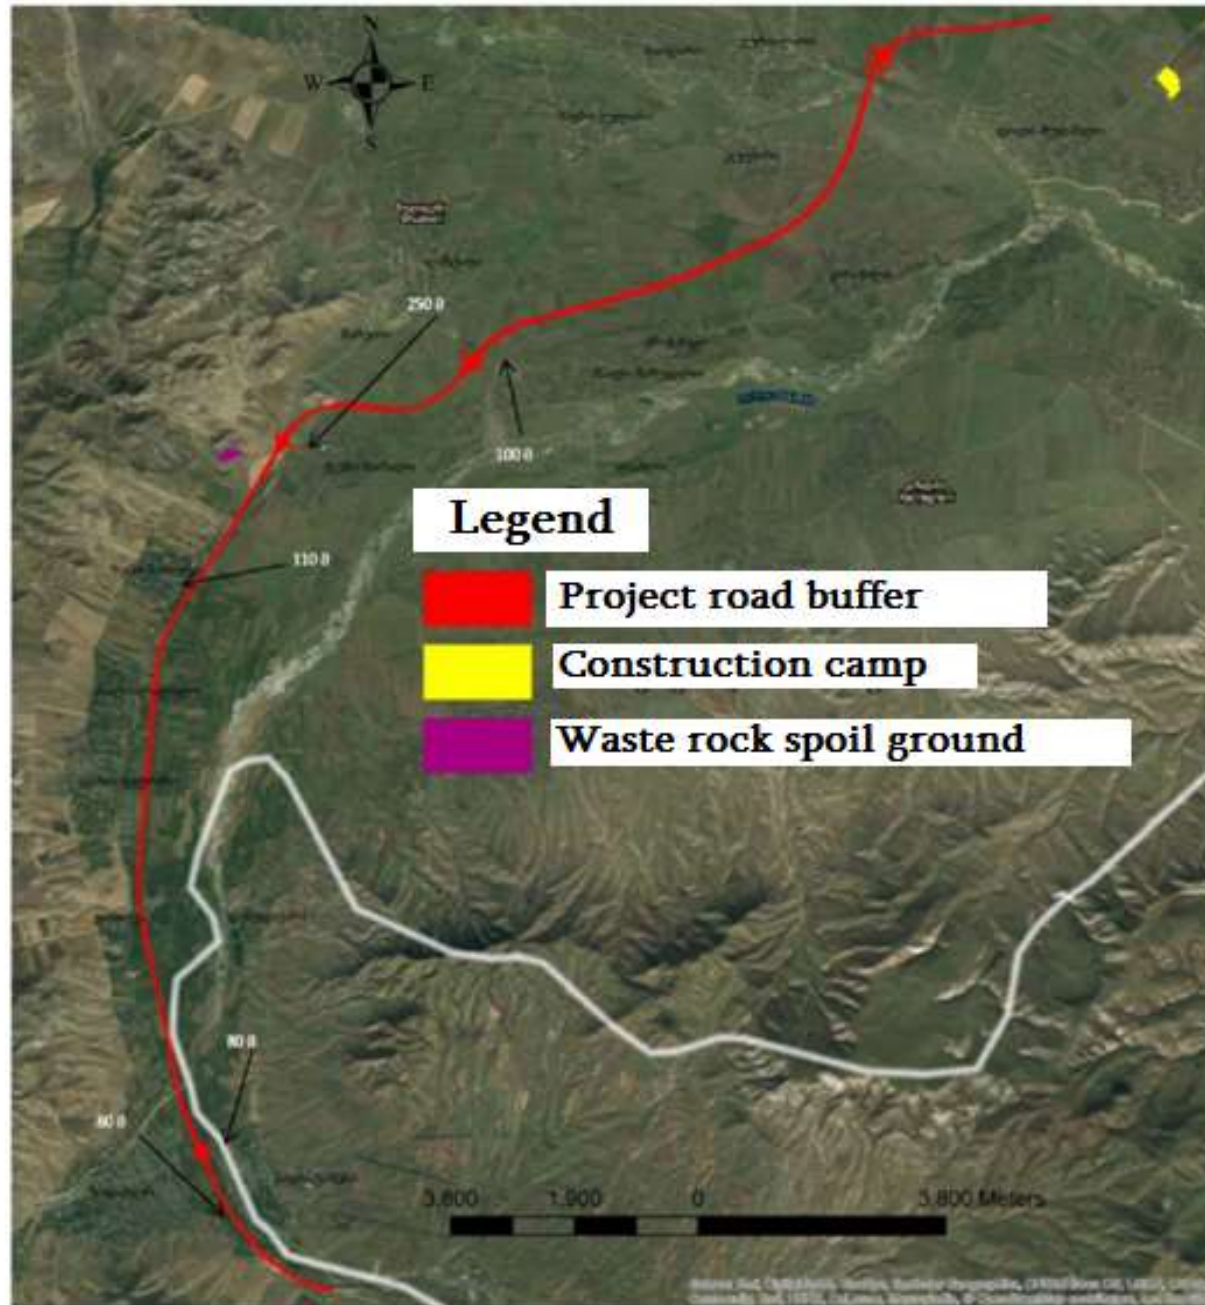

4.2 Geometric parameters of the Road Alignment

The geometric design of the new motorway alignment has generally followed the requirements of the TEM standards. Table 4.2.1 shows the design parameters required for the main carriageway, connector and slip roads, at the selected design speed of 120 kph.

Table 4.2.1. Geometric design parameters

Horizontal and vertical alignment (main carriageway)	Minimum horizontal radius Min. Convex vertical radius Min. Concave vertical radius Maximum longitudinal gradient Min. longitudinal gradient Min. crossfall in straight sections Max. cross fall in curved sections Minimum transition length Min. radius requiring the same cross slope as for straight sections Stopping distance Stopping distance in curves Minimum vertical clearance	650 m 12 000 m 8 000 m 5 % 0,3 % 2.5 % 7 % 70 m 3 500 m 200 m 250 m 4.7 m
Horizontal and vertical alignment of interchange	Minimum horizontal radius Min. Convex vertical radius Min. Concave vertical radius Maximum longitudinal gradient Min. longitudinal gradient Min. crossfall in straight sections Max. cross fall in curved sections	650 m 12 000 m 12 000 m 5 % 0,3 % 2.5 % 7 %
Horizontal and vertical alignment of other interchanges and slip roads	Min. Design speed Minimum horizontal radius Min. Convex vertical radius Min. Concave vertical radius Maximum longitudinal gradient Min. longitudinal gradient	40 km/h 50 m 800 m 400 m ↑ 6% ↓ 6% 0,3 %
Cross section (main Alignment)	Platform Carriageway Traffic lanes (2 per carriageway) Shoulder Center mall Verges w/o side pavement	27.5m 11 m 3.75 2.5 m 3.0 m 1.25 m
Cross section (two lane connector)	Carriageway Shoulder Verges	3.5 Ø 1.0 Ø 0.5 Ø
Cross section (slip roads)	Carriageway width Shoulder width Verges w/o side pavement	4.0 Ø 1.0 Ø 0.5 Ø

4.3 Typical cross sections of the motorway

As mentioned above, the projected highway will follow the requirements of the TEM standards. Consequently, the cross sections are identified according to THE standards. A typical cross of the road is given in Drawing 4.3.1. Drawing 4.3.2 shows a typical cross of a two-lane ramp with asphalt concrete pavement.

Figure 4.3.1. Typical cross sections of the new road


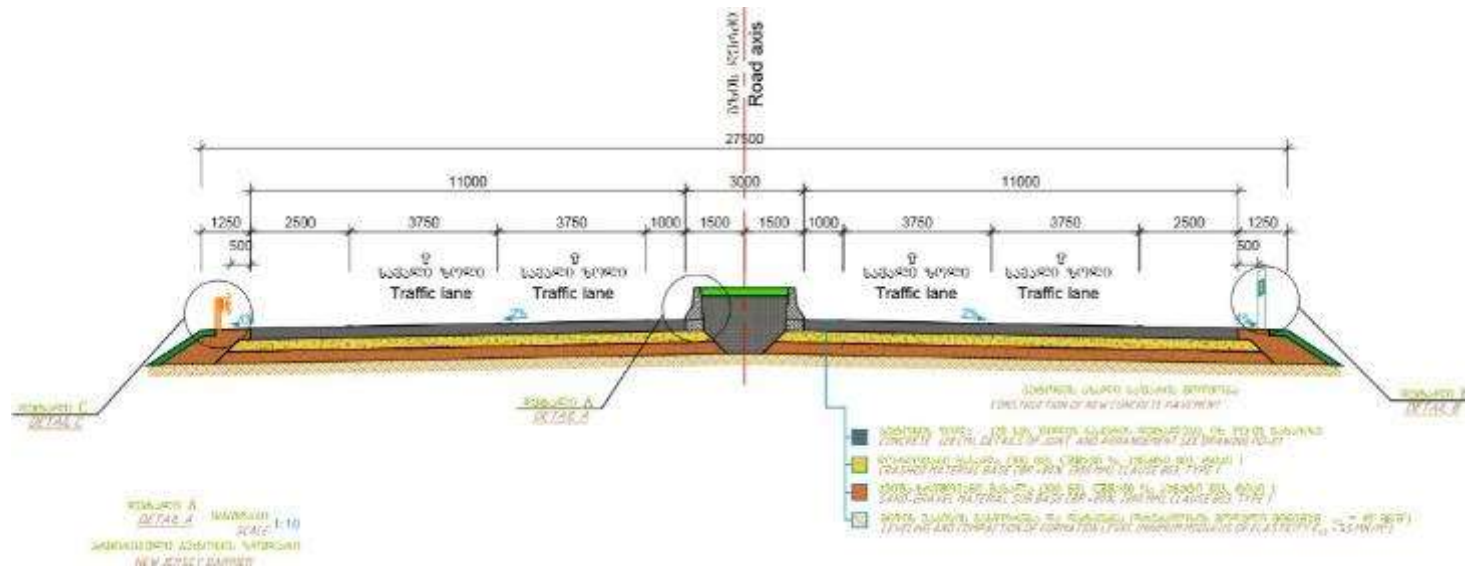


Figure 4.3.2. Typical cross section of two lane ramp with asphalt concrete pavement

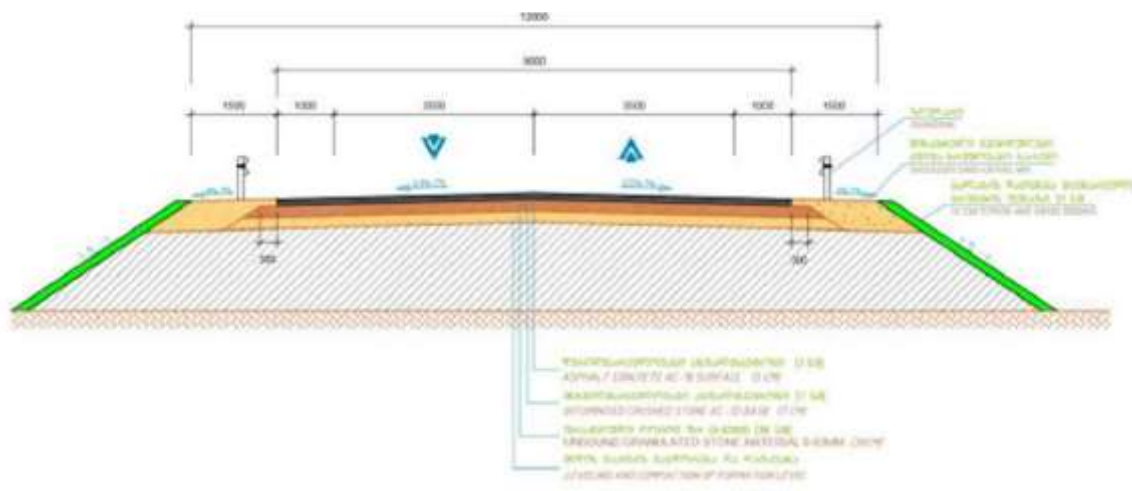


4.4 Underpasses/viaducts

Within the scope of the Algeti-Sadakhlo Motorway, total 4 viaducts underpasses/viaducts are designed. Along section 1 of the motorway (Algeti-Mareti), 2 underpasses will be provided and 2 other underpasses will be provided along section 2 (Mareti-Sadakhlo). Their description is given below.

Underpass at km 2+900, approx, Mughanlo interchange

The given interchange allows crossing the existing local road with a bridge. The first crossing point was found at 3+245 km, but was moved to 2+888 km to provide sufficient height for the traffic running under the bridge. A small diamond interchange was designed with two round underpasses, one on each side of the motorway. This solution allows large vehicles turning safely in any direction. Maintaining the existing local road is important for the local people to travel.


Drawing 4.4.1. Underpass km 2+900, Mughanlo Interchange

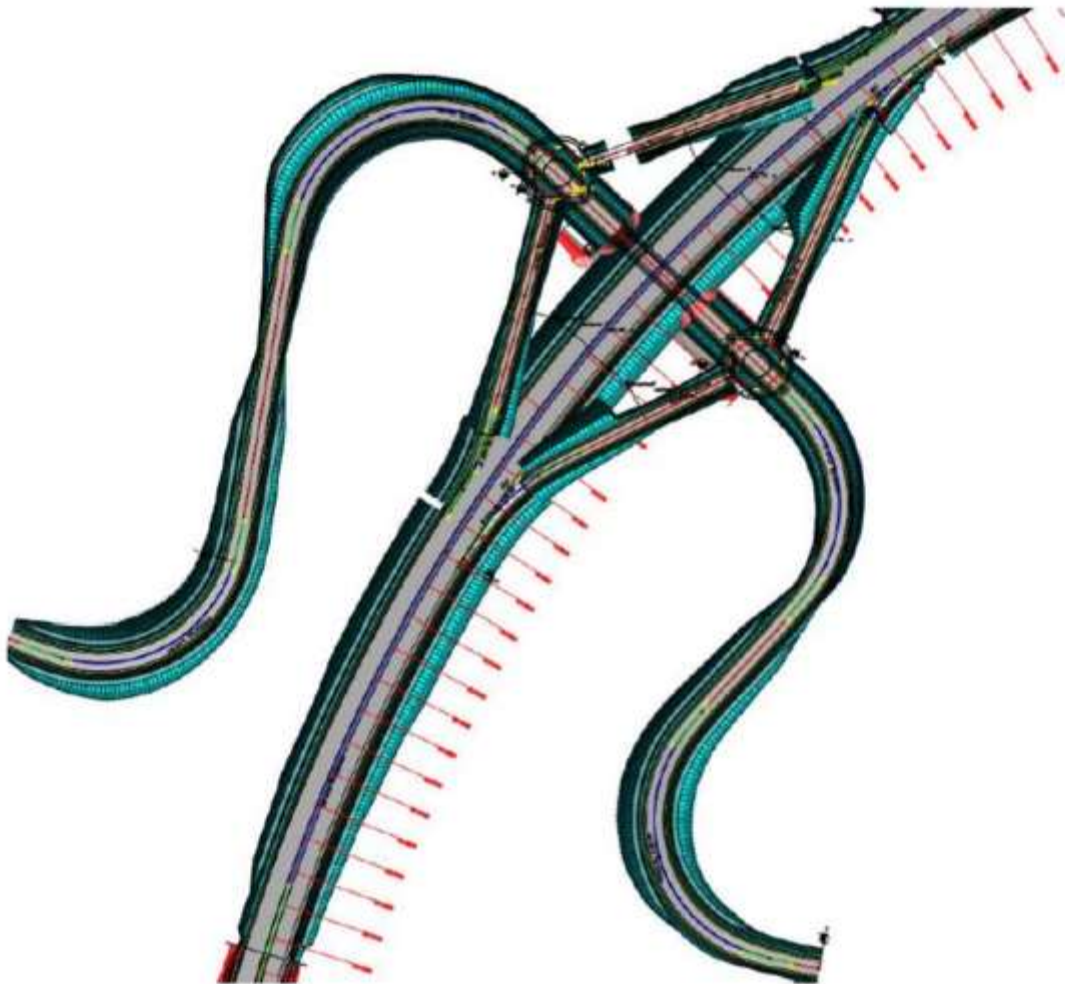

Araplo Interchange approximately 11+400 km


The given underpass allows maintaining the existing local road connecting village Marneuli and village Araplo. Like the previous underpass, this object too, was moved to a more profitable location to provide sufficient height for the vehicles by using an underground pass (which will be made of a box culvert with sizes 8 x 4,7 m).

Figure 4.4.2. Araplo Interchange 11+900 km

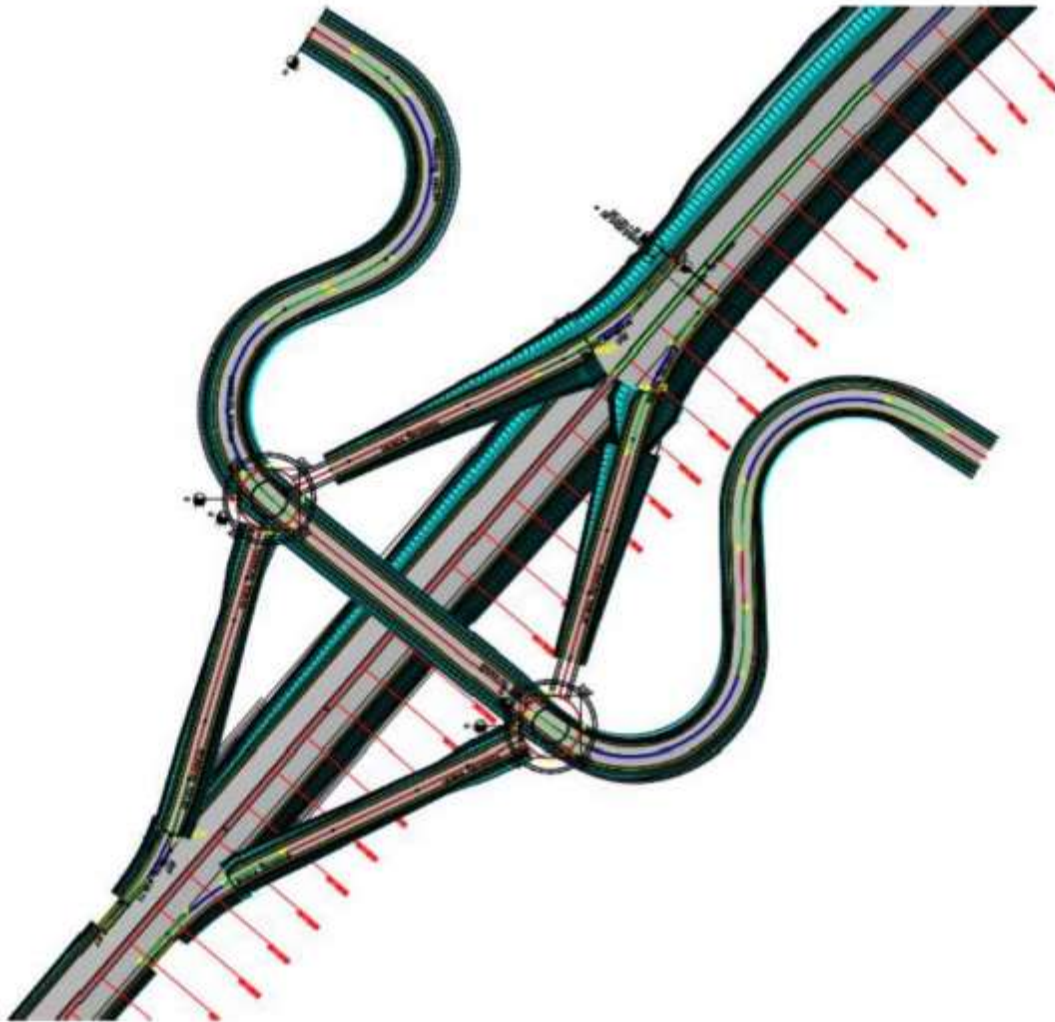


Only two relatively simple interchanges were required in Lot 4, section 2 of the design highway, as the proposed road was located in relatively flat surroundings with no major roads crossing the of corridor. Figure below shows the Mareti interchange and Sadakhlo interchange.

Mareti Interchange

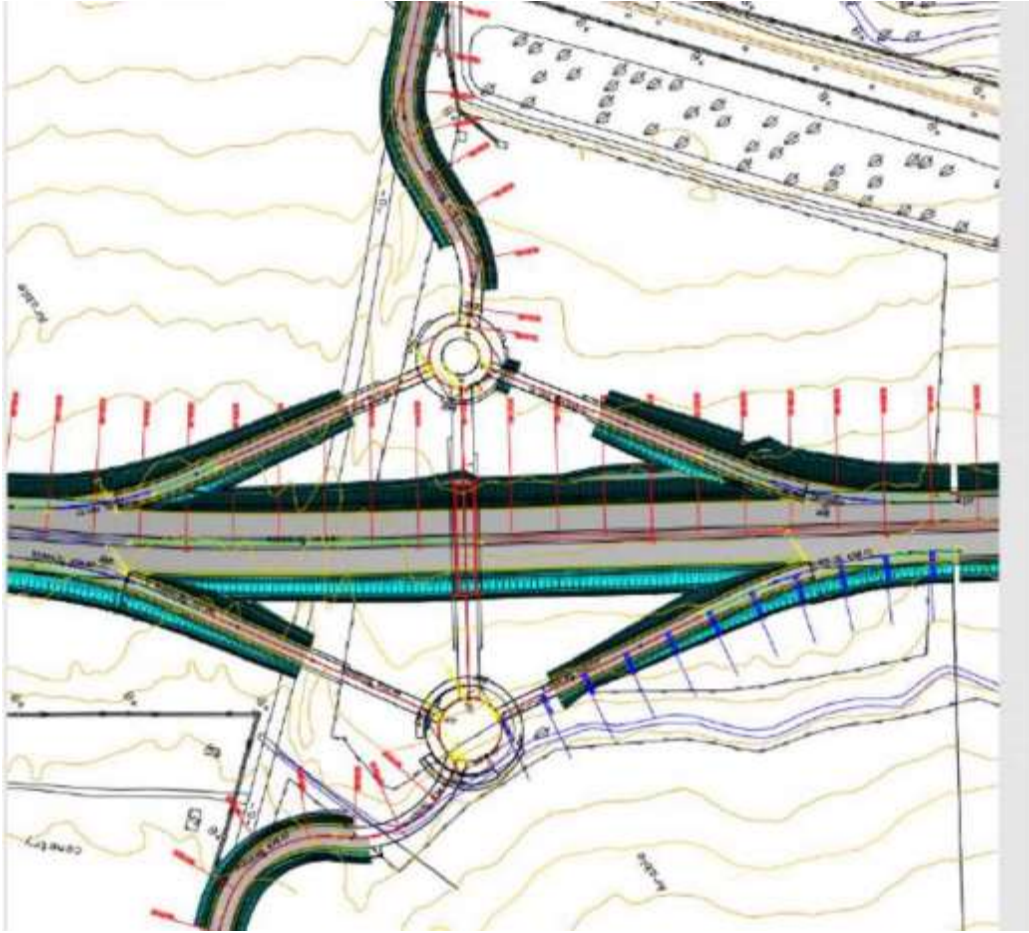

Sadakhlo Interchange

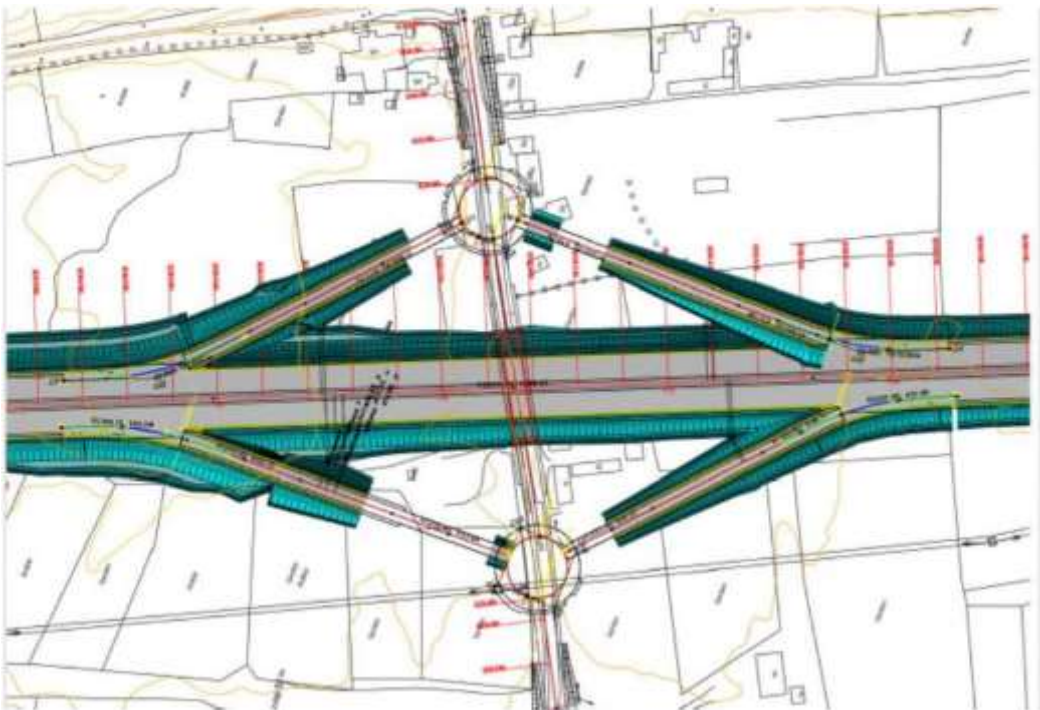

4.5 Bridges

Total 4 bridges are planned to construct within the scope of Algeti-Sadakhlo highway including (№6 and №8) which are the bridges across the river. One of them (#7) will be built across the railway line, and another (#17) is a bridge of an overpass type. The principal parameters of the bridges are given in table 4.5.1.

Table 4.5.1. Principal parameters of the bridges planned to construct on the project highway


Bridge №	Chainage, km	Length, m	Deck Dimensions BxL	DeckArea m2
Brisge №6 (Khrami River)	3+452.59	144,4	(2*14)*(4*33)	3696
Overpassing bridge №17	2+896.45	78,2	(1*12,2)*(2*33)	805
Bridge №7 (crossing point with the railway)	0+522.03 ²	81,4	(2*14)*(2*33)	1848
Bridge №8 (Riv. Banovcha)	12+193.9	78,2	(2*14)*(2*33)	1848

Bridge №6 Khrami River

The bridges are double bridges with two traffic lane in each direction crossing the River. The bridge is made up of 4 spans. The length of each bridge span is 33 m. The width of the carriageway is 14 m. The bridge carriageway was designed with prestressed, T-shape concrete beams and in-situ cast decks and cast-in-place bridge deck. The substructures are designed with in-situ reinforced concrete abutments and in-situ two-column type pier. Foundations consist of cast in place concrete boredpiles.

Typical cross sections of the bridges are given on Drawing 4.5.1.

Drawing 4.5.1. Typical cross section of the design road

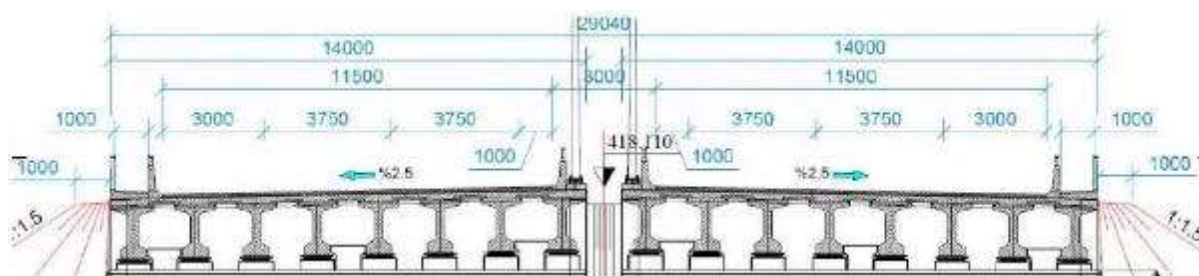

Overpassing bridge N17

Bridge #17 crossing the project highway is a single span bridge with a single lane in each direction. It crosses the designed highway from above. This simple bridge will have spans with the length of 33 m. the width of the road of bridge is 12.2 m. The road of bridge is designed with pre-stressed reinforced concrete beams of an inverse T shape and has a cast-in-place deck. The bearing structure is designed with reinforced concrete cast-in-place bank abutments and one-column cast-in-place abutment. The foundations are made up of cast-in-place bored concrete piles.


¹ The numbers of bridges are taken as per the project, by considering the bridges planned along Rustavi-Red Bridge Highway;

² The chainage is taken from the starting point of Lot 4

Railway overpass bridge N7

The railway overpass bridge belongs to the highway, which will run along the line occupied by the railway. Safety measures for power lines, railway ROW and railway line free area are envisaged. Bridge N7 is shown on the plan on Drawing 4.5.2.

Drawing 4.5.2. Railway overpass bridge N7

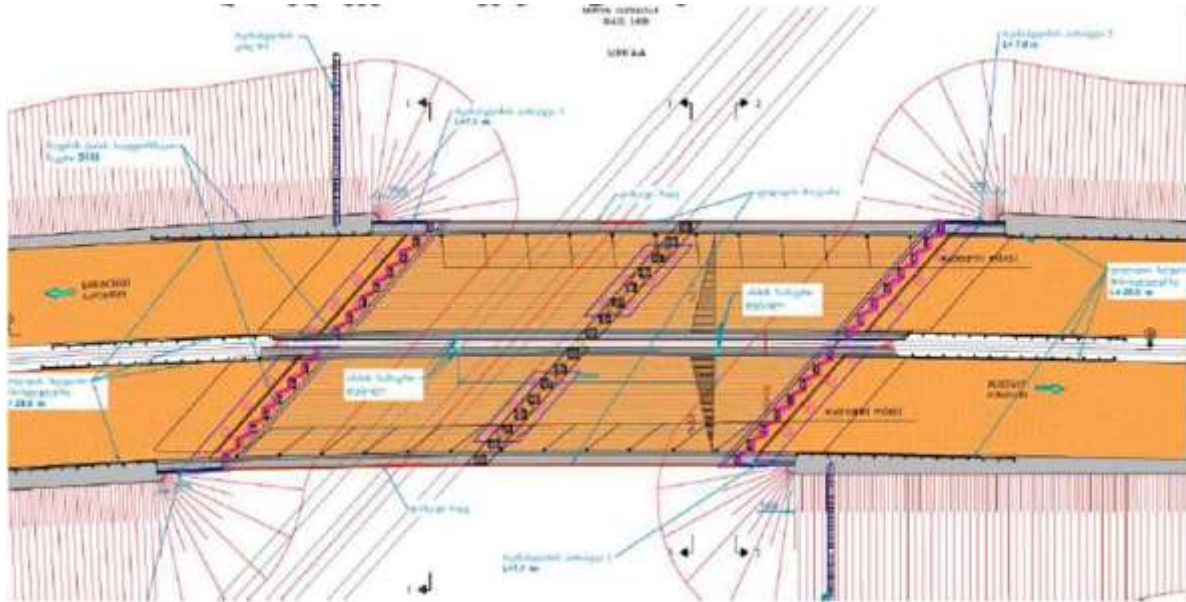

Bridge N 8 across River Banovcha

The length of the road of the bridge will be two lanes with the width of 3.75 m, shoulders with the width of 2,5 m + fencing edge beams of 0,5 m on both sides, making total of 13.50m. As this is a road of a limited use, the total width of the footpath was reduced to 0,5 m. The geometrical parameters were set as follows:

Road of bridge – $2 * 3,75 = 7,50\text{m}$

Safety lines on both sides – $2 * 0,5 \text{ m} = 1,00\text{m}$


Central mall – 2,50m

Footpath – 2,50m

The slab of the bridge road is made up of pre-stressed reinforced concrete beams of an overturned T shape and has a cast-in-place deck. A typical bridge superstructure is 33 m. The height of the relevant beam is 1500 mm. The beams are located at 1800 mm distance.

A typical foundation of the river bridges are shown in Drawing 4.5.3.

Drawing 4.5.3. Typical foundation of river bridges

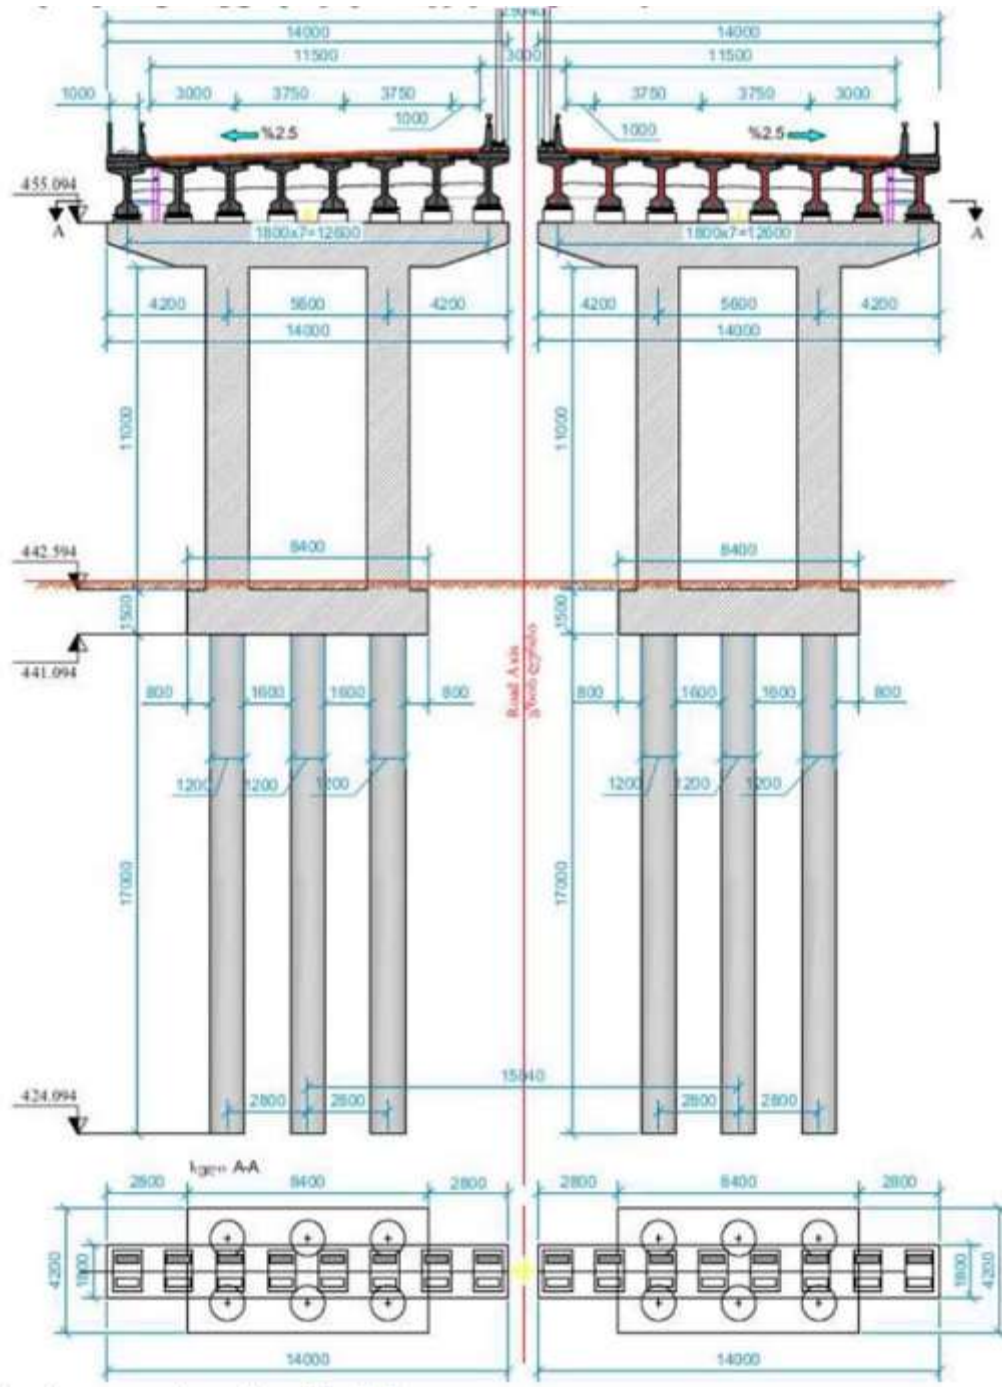

4.6 Water pipes (culverts)

Reinforced concrete box culverts were designed for drainage purposes and also for the provision of access from one side of the motorway to the other, particularly for farm vehicles and animals. Box culvert underpasses were also provided where effective land use would otherwise have been affected, or where land was effectively severed by the Motorway alignment.

Reinforced concrete round pipes were designed mostly for water drainage and irrigation channels/ditches maintenance purposes. Without them, the highway embankment will deteriorate their condition.

The principal parameters of the box culverts for first sections of the project road are given in table 4.6.1. The main parameters of the box culverts for second sections are given in the table below 4.6.2

Table 4.6.1. The principal parameters of the box culverts for first sections of the project road

Chain age on CL	Underpass Description	Culvert Length
0+236	Round culvert 1.5 m dia.	57
0+630	Round culvert 1.5 m dia.	40
1+100	Round culvert 1.5 m dia.	40
1+701	Round culvert 1.5 m dia.	32
2+296	Main underground crossing, size 8x4,5 m	36
2+615	Road vehicle underground crossing 6.0 x 4.5 m	38
2+632	Round culvert 1.5 m dia.	40
4+560	Road vehicle underground crossing 6.0 x 4.5 m	36
5+356	Road vehicle underground crossing 6.0 x 4.5 m	36
5+785	Main underground crossing, size 8x4,5 m	46
6+283	Round culvert 1.5 m dia.	36
7+160	Round culvert 1.5 m dia.	43
7+486	Round culvert 1.5 m dia.	36
7+708	Round culvert 1.5 m dia.	35
8+328	Round culvert 1.5 m dia.	42
8+808	Road vehicle underground crossing 6.0 x 4.5 m	52
9+518	Round culvert 1.5 m dia.	47
9+770	Main underground crossing, size 8x4,5 m	42
10+190	Round culvert 1.5 m dia.	51
10+450	Round culvert 1.5 m dia.	39
10+728	Road vehicle underground crossing 6.0 x 4.5 m	55
11+720	Main underground crossing, size 8x4,5 m	37

Table 4.6.2. The main parameters of the box culverts for second sections


CH	Description of pipes	Pile length
0+120	Vehicle underpass 6.0m x 4.5m	36m
0+665	Vehicle overpass 6.0m x 4.5m	36m
0+784	Reinforced concrete box culvert 2.0m x 2.5m	42m
1+279	Vehicle underpass 6.0m x 4.5m	36m
1+421	Reinforced concrete water-pipe 1.5m diameter	46m
1+720	Main underpass 8.0m x 4.7m	30m
2+708	Reinforced concrete water-pipe 1.5m diameter	31m
3+078	Reinforced concrete water-pipe 1.5m diameter	34m
3+213	Reinforced concrete water-pipe 1.5m diameter	35m
4+348	Vehicle underpass 6.0m x 4.5m	36m

6+061	Vehicle underpass 6.0m x 4.5m	36m
6+301	Vehicle underpass 6.0m x 4.5m	39m
6+535	Reinforced concrete water-pipe 1.5m diameter	37m
6+960	Reinforced concrete water-pipe 1.5m diameter	35m
6+970	Vehicle underpass 6.0m x 4.5m	30m
7+529	Vehicle underpass 6.0m x 4.5m	30m
8+147	Reinforced concrete water-pipe 1.5m diameter	31m
8+595	Reinforced concrete water-pipe 1.5m diameter	36m
8+935	Reinforced concrete water-pipe 1.5m diameter	34m
9+583	Vehicle underpass 6.0m x 4.5m	30m
9+891	Reinforced concrete water-pipe 1.5m diameter	38m
10+738	Reinforced concrete water-pipe 1.5m diameter	31m
11+169	Reinforced concrete water-pipe 1.5m diameter	31m
12+414	Reinforced concrete water-pipe 1.5m diameter	32m
13+229	Main overpass 8.0m x 4.7m	30m
14+249	Reinforced concrete water-pipe 1.5m diameter	45m
15+135	Reinforced concrete water-pipe 1.5m diameter	33m
15+875	Vehicle underpass 6.0m x 4.5m	36m
16+101	Reinforced concrete water-pipe 1.5m diameter	36m


4.7 Road pavement

Two types of road pavement are planned to use for design highway: non-rigid concrete pavement will be used for bridges, interchange ramps and roundabouts, while rigid pavement will be used along other sections of the highway. The types of the pavements are shown below:

Drawing 4.7.1. Road pavement

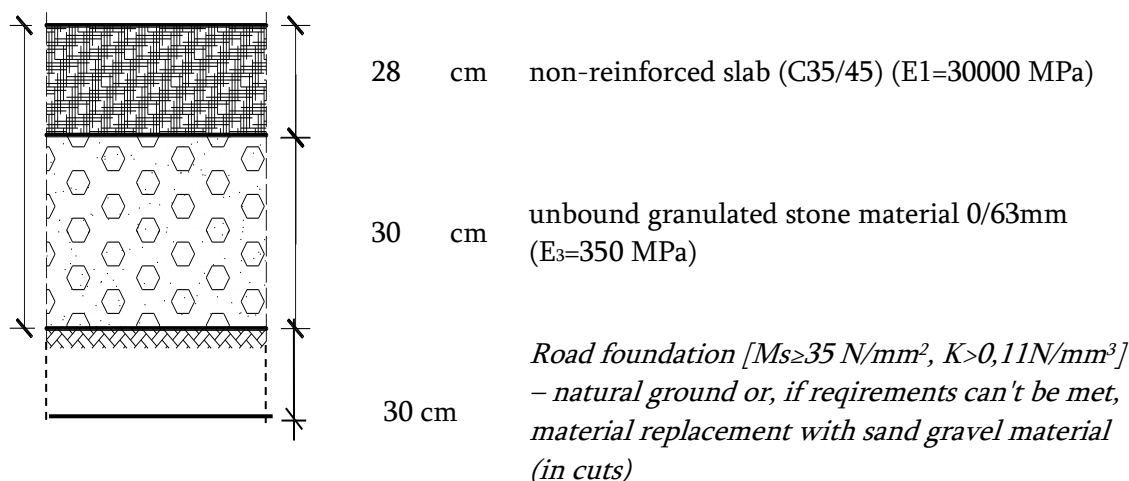

Drawing 4.7.2. Schematic section of the rigid road pavement

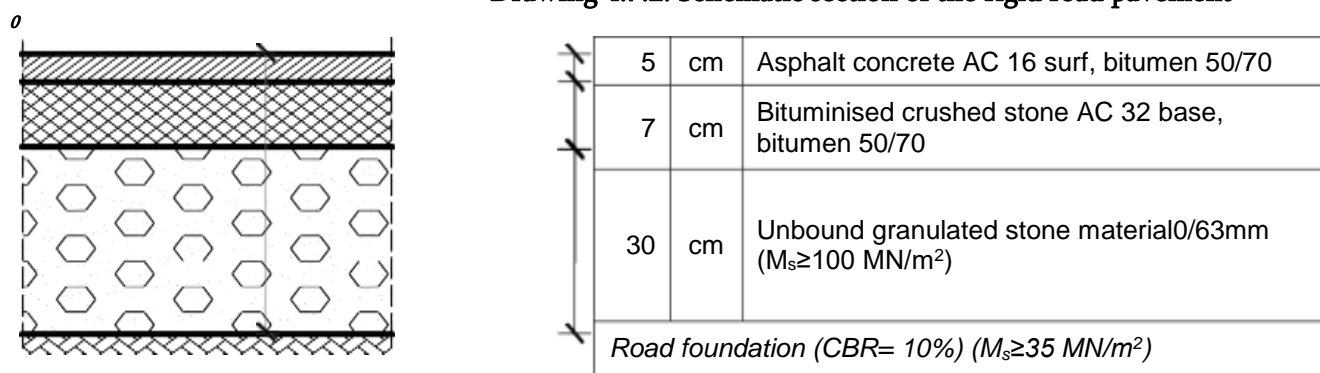

4.8 Drainage systems and protection against erosion

The tasks under Hydrology and Drainage are the definition of all the drainage arrangements along the road, for both ditches and gutters along the alignment, and pipes, box culverts or bridges crossing the alignment. A preliminary sizing of the culverts has been done in the Feasibility Study stage.

Calculation of design peak discharge

Two different methods have been applied to the calculation of the flood peak discharges, depending on the size of the catchments. Catchments less than 200 square kilometres have been computed with the Rational Formula,

$$Q = 0.278 * C * I * A$$

where:

- Q** peak flow at catchment outlet (culvert) [m³/sec]
- C** runoff coefficient [-]
- I** rainfall intensity [mm/h] of the T duration
- A** catchment area size [km²]

(b) Catchments greater than 200 square kilometres have been evaluated by employing a hydrological model.

The calculation provided at the stage of designing the facilities crossing the surface water are compliant

with the results of the hydrological calculations accomplished in the course of the EIA procedure. The design facilities ensure safe transfer of the peak discharges.

Drainage system on the surface of the highway

In order to provide a safe traffic operation it is important to keep the surface of the motorway free of rainwater in case it is raining

Since the Georgian motorway design standard SST72 2009-Public Motor Roads Geometric and Structural-Requirements does not provide design guidelines for the installation of motorway surface drainage facilities the Consultant adopted the German design standard RAS-Ew.

According to RAS-Ew drainage area of 600m² can be connected to an inlet resulting in a maximum drain pipe length of 50m.

The pipes have to be installed with bottom slopes ranging from 0.04% to 2.78%.

Roadside Drain Design

Roadside drains have been foreseen in order to collect rainfall discharge in cases where this runoff water cannot be collected by the motorway surface drainage pipeline.

In general trapezoidal ditches with a bottom width of $b = 0.5$ m and a side slope of vertical to horizontal ($v/h = 1/1.5$) are proposed. The capacity of the required roadside drains was determined by employing the Manning-Strickler equation.

$$Q = A * k_{St} * r_{hy}^{2/3} * I_s^{1/2}$$

Where:

- Q flow (m³/s),
- A wetted cross section area of the drainage ditch (m²),
- k_{St} Manning's flow coefficient (m^{1/3}/s),
- r_{hy} hydraulic radius (m), and
- I_s slope of the bottom (-).

The hydraulic radius is defined as ratio of flow cross section area by wetted perimeter:

where

$$r_{hy} = \frac{A}{l_U}$$

- r_{hy} hydraulic radius(m),
- A cross section area (m²),and
- l_U wetted perimeter(m).

In addition the shear stress was calculated by employing the following formula

$$T = r * g * r_{hy} * I_s$$


Where:

- T shear stress in N/m²
- r density of water (r = 1000 kg/m³)
- g gravitational acceleration (g = 9.81 m/s²)
- r_{hy} hydraulic radius of the wet cross section
- I_s bottom slope of the roadsidedrain.

The calculated shear stress indicates whether the roadside drain has to be protected against erosion. If the cross section of the roadside drain is covered with grass then the roadside drain can withstand shear stresses of up to $T = 30\text{N/m}^2$. The calculated shear stresses are varying between 6 N/m^2 and 39 N/m^2 .

The water from the bridges will be drained by means of an inclination of 2,0-2,5% both, in the pedestrian and road lanes. The plan of the drainage system of the bridges is shown in Drawing 4.8.1.

Drawing 4.8.1. Drainage system of bridges

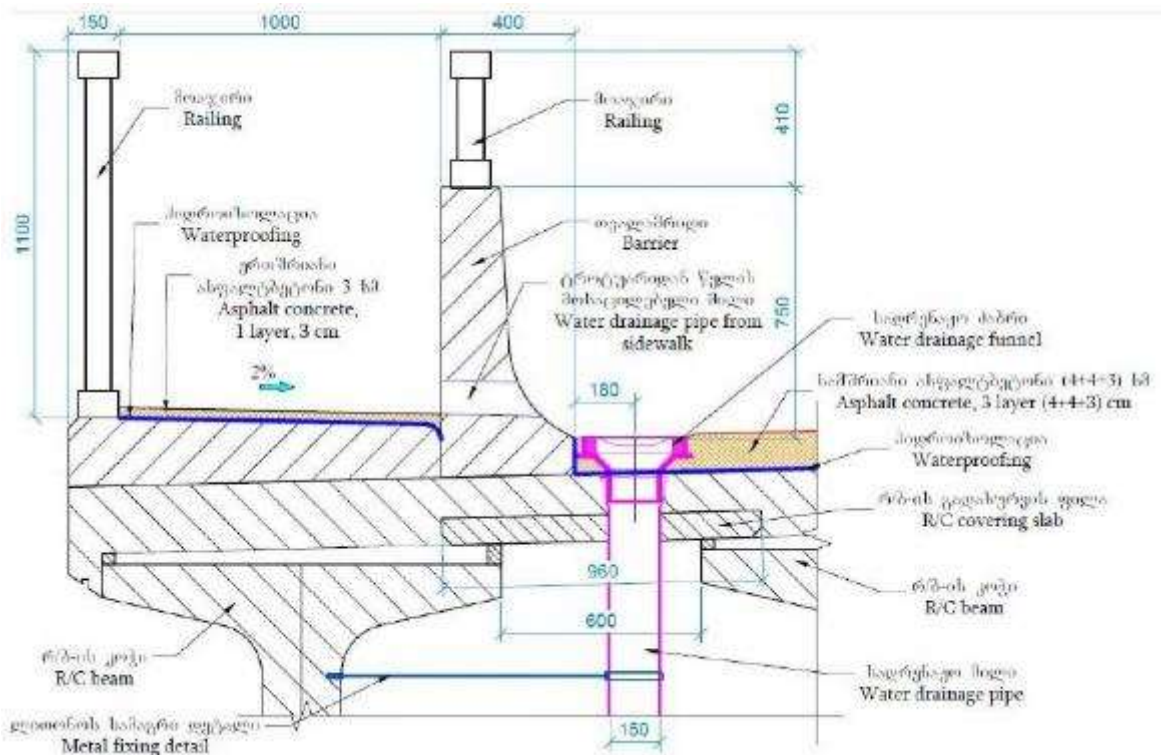

Erosion Protection

If the flow at the outlet of the culvert is super critical then a hydraulic jump occurs shortly after the outlet. The hydraulic jump is associated with a high energy conversion. The energy conversion produces erosion which should be avoided.

Erosion protection in the form of gabion boxes has been provided at culvert outlets when the Froude number exceeds 1 indicating a hydraulic jump to be occurring. Gabion boxes have been selected due to the following reasons:

- it is relatively cheap;
- it is a flexible protection and often finds its own effective level
- it is easy to install and repair by hand.

However, the length of the hydraulic jump and thus the length of the gabion boxes have to be calculated. In the first step the correlated tail water depth has to be calculated with the following formula:

$$h_{\text{tail}} = h_{\text{out}} * (0.5 ((Fr_{\text{out}}^2 + 1)^{0.5} - 1))$$

Where

h_{tail} correlated tail water depth in m

h_{out} water depth at the outlet in m (result of HY8)

Fr_{out} Froude number of the flow at the outlet (-) (result of HY8).

After having calculated the correlated tail water depth the length of the hydraulic jump can be calculated with the following empirical formula

$$L = 6 * (h_{\text{tail}} - h_{\text{out}})$$

Where

L length of the hydraulic jump

h_{tail} correlated tail water depth in m

h_{out} water depth at the outlet in m

Expected washing depths near the design piers

Bridge piers are susceptible to scour. There are some procedures available to calculate the expected pier scour depth. However, most formulas are based on laboratory tests and it is well known that these estimates are very conservative. However, the Consultant employed the Colorado State University equation (CSU Equation) to obtain an estimate of the scour depth to be expected. The CSU Equation is recommended by the FHWA and it is published in the Hydraulic Engineering Circular 18 (HEC 18) of the FHWA.

$$t_{sc} = h * (2 * K_1 * K_2 * K_3 * h^{0.35} * (D/h)^{0.65} * Fr^{0.43})$$

where :

- t_{sc} the expected scour depth in m
- K_1 Correction factor for pier nose shape. $K_1=1$ for piers with cylindrical shape or for a group of piers with cylindrical shape.
- K_2 Correction factor for angle of attack of flow.

$$K_2 = (\cos(a) + L/D * \sin(a))^{0.65}$$

where:

- a angle of attack in degrees
- L pier length in m
- D pier width in m
- K_3 correction factor for bed condition. K_3 ranges from 1.1 to 1.3
- h flow depth directly upstream of the pier in m (result of HEC-RAS)
- D pier width in m
- Fr Froude number directly upstream of the pier (result of HEC-RAS)

The above formula is also implemented in the software package HEC-RAS

The calculations showed that the expected washout depth at the bridge piers varies within 1.93-2.65 m.

4.9 Road Safety

Road safety design was done in accordance with the Georgian design standards and good engineering practice generally. The project road was planned as a motorway with a main carriageway design speed of 120 km/h. Road safety considerations were therefore given high priority in the design of the high-speed road with the aim of minimizing the occurrence of road traffic accidents of all kinds.

Road signs, pavement markings and safety barriers at the central median, along the roadside verge, and alongside and at approaches to structures, were considered and incorporated within the design in accordance with TEM Standards or the appropriate recommended international standard for traffic safety. Road lighting was also considered to be an important safety feature for the project road.

4.10 Construction Organization

Prior to the onset of the core works, the organization and technical issues will be solved to provide a field of construction operations. Preparatory works envisage arranging a temporary infrastructure (construction camps) necessary for the highway construction works and mobilization of relevant construction machines/mechanisms (crusher and sorting plant, asphalt plant, etc.). An issue of water- and power-supply of temporary objects and the like will also be solved.

After the preparatory stage, the construction corridor will be prepared for construction meaning the relocation of existing engineering and communication lines, cutting trees and plants.

Afterwards, earthworks are planned (including the striping and storage of top soil). Sections and fills will be provided at relevant locations in the project corridor; roadbeds will be prepared and the topography will be put in order.

At the same time, the road infrastructure will be provided and viaducts, bridges and other communications will be constructed.

After the construction of the road and bridges is over, certain improving works will be accomplished, including the installation of the road marks, painting lanes, etc.

An important stage of the project implementation is the management of different types of waste originated in the course of the construction. After the construction works are complete, the building camps and other temporary facilities will be demobilized, the cultivation works will be done and the landscape will be harmonized.

The proposed motorway is the new construction expecting the longer service ability and durability. The consultant considered geophysical condition for existing road, construction operation factors, budget and disbursement plan, and miscellaneous condition such as weather, custom conditions, urgent condition for implementation, and community events to evaluate construction period. The construction period for Rustavi-red bridge is estimated to be 30 months

The works of the project highway will be realized as a single plan, i.e. the earthworks will be accomplished all along the corridor and the viaduct sections and bridges will be constructed simultaneously. As the works are finished, improvement and recultivation works will be accomplished all along the road. The preparatory works will take approximately 1 to 2 months. The improvement and recultivation works will take approximately the same time. The remained time of construction (26-28 months) covers major works, including earthworks and concrete works.

Approximately 90-100 people will be employed in the construction phase, with minimum 70% local people.

4.10.1 Proposed camp site

The main camp will be provided along the first section envisaged in the scoping phase, in particular: near the initial section of the project corridor, east of village Didi Mughanlo, approximate coordinates: X–498353;Y–4582495. Plot cadastre code: 83.07.08.708 (see Figure 4.10.1.1.). This territory will be used during the construction of Rustavi-Red Bridge Highway as well.



Figure 4.10.1.1. Proposed site for the main camp

The proposed territory is approximately 7 ha and is totally fenced with a concrete enclosure of 2-2.5 m height. There are also premises with no function on the given territory, which can be freely used for various activities, e.g., for storing materials, installing equipment, etc. The given territory also has areas free from any premises, which can be used by considering the existing needs. The territory is under high anthropogenic impact and virtually, has no topsoil. The selected plot is located east of village Didi Mughanlo, with the nearest residential, house located approximately 800 m in village Lezhbadini. The given territory can be accessed by the existing road. There is an irrigation channel near the plot. The plot has all types of communication, such as electrical power and gas supply.

On the territory of the selected construction camp, a vehicle parking area, concrete plant, etc. The plant of the contracting companies operating in the Region will be used for crushing and sorting of inert materials, which will be located on the inert materials extraction site. Despite this, the operation of the given plant on the territory of the camp was considered in the calculations of the emissions into the atmospheric air to assess the value of impact for the worst scenario.

The exact composition of the camp and general layout will be specified further prior to the commencement of the construction works, at the discretion of the Construction Contractor and will be agreed with the Ministry in case of a relevant request. The general layout of the camp considered at the given stage is given in Drawing 4.10.1.1. Besides, on other sites of the project corridor, the Construction Contractor may provide the construction grounds of a minor composition, mostly to store materials and keep techniques on them. When identifying such sites, the following important issues will be taken into account:

- Near location of the highway to the construction corridor.
- Availability of communications (water- and power-supply, existing roads, etc.).
- Satisfactory natural conditions (plane relief, less vegetation, less soil cover).
- Sufficient distance to the sensitive receptors (houses, protected areas, etc.) so that the expected impacts caused by noise, emissions and vibration are minimized.
- Category of the site owner and land plot (state lands must be preferred; however, relevant agreements with private entities are also an option).

The exact parameters of the temporary construction grounds, as per the request, will be agreed with the Ministry of Environmental Protection and Agriculture of Georgia before the works start.

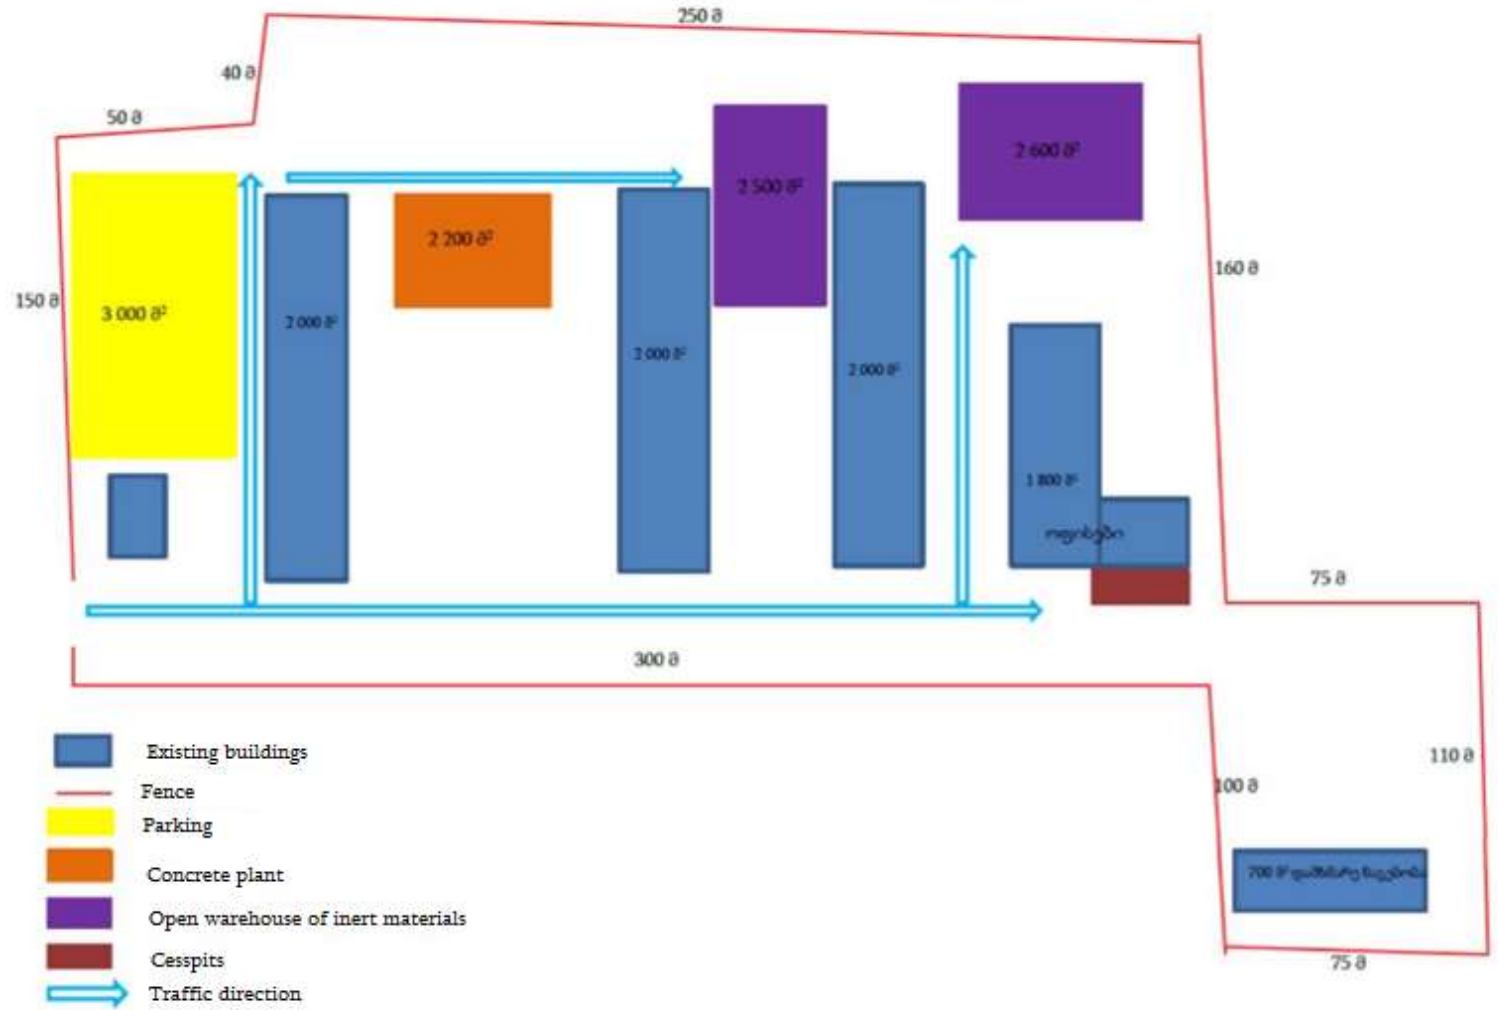


Figure 4.10.1.2. Construction Camp Layout (will be specified prior to the commencement of the works)

4.10.2 Dumpsites

During the construction of the project road, waste rock is expected to originate mainly during the construction of bridges and in minor amounts during the relief leveling works. The relief leveling works will be mostly necessary along the road section running west of village Kvemo Sarali and along the last section of the project road. 60% of the originated waste rock will be used during the construction works. In the construction phase, approximately 120 000 – 150 000 m³ spoil will be necessary to dispose permanently.

The environmental consultation company has suggested approximately 2 ha of land plot owned by the state (cadastre code 83.09.05.703), west of village Kvemo Sarali where the waste rock will be suitable to dispose during the construction. The transportation distance will be 4.5 km and there are no densely populated areas between the construction ground and the selected dumpsite.


The vegetation cover on the site selected for the dumpsite is grass only. The topsoil in the area is approximately 10 cm thick. The topsoil stripped from the plot will be placed on the selected site, in isolation from the waste rock and will be later used to recultivate the same territory. The existing ground road runs to the selected area. The nearest residential house in village Sarali is located more than 1 km away.

The view of the selected site is given in Figure 4.10.2.1., and its location is given in Drawing 4.10.2.1.

Figure 4.10.2.1. View of the site selected as a dumpsite



Drawing 4.10.2.1. Location of the site selected as a dumpsite

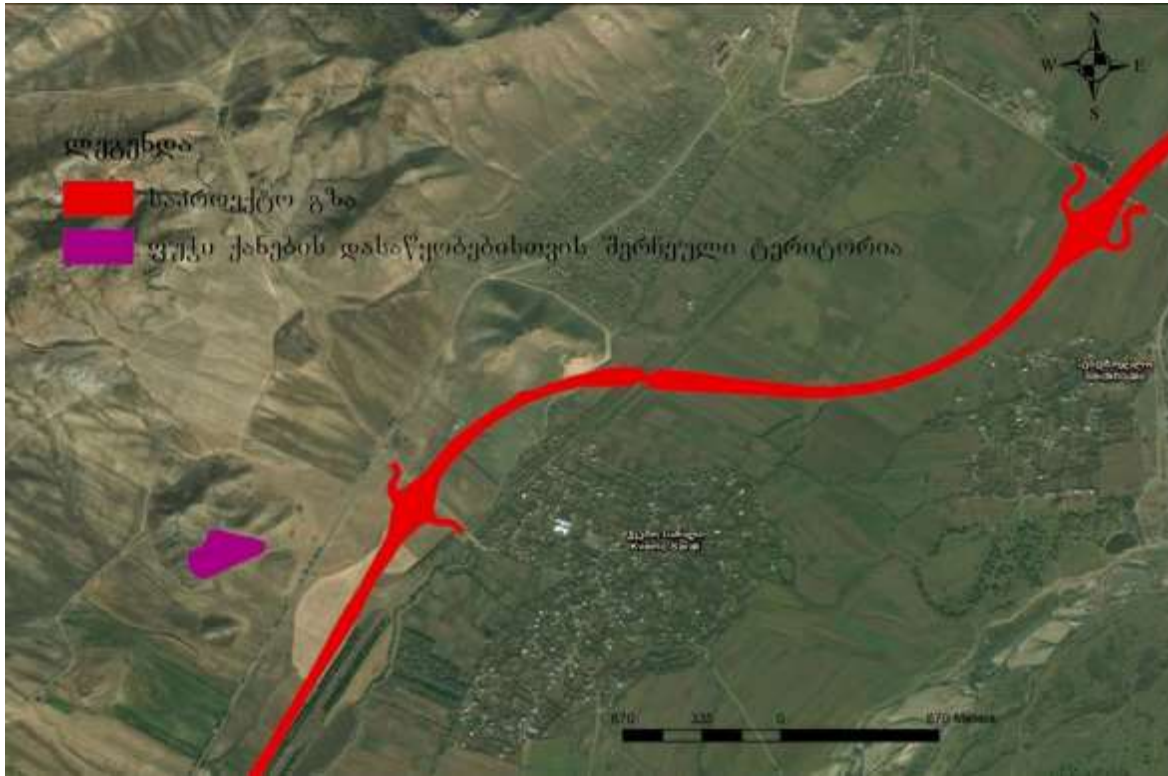

When disposing the waste rock on the dumpsite (spoil ground), the following conditions will be met:

- The question of providing spoil grounds will be agreed with the local authority;
- Before the spoil grounds are used, the existing trees and vegetation will be cleared and the topsoil will be stripped;
- Waste rock will be stored/placed in sections, layer by layer;
- The height of each pile will be 2 m. The second and third layers will be arranged in a similar mode. The total height of the pile will not be more than 5 m what is optimal to mitigate the risk of instability and negative visual impact;
- An angle of natural gradient of the territories selected for spoil grounds will be 1:2. Slope angle of the embankment will be 40°;
- Drainage channels will be provided as necessary;
- Vehicle traffic will be safe to the sites of the spoil ground where waste rocks are disposed.;
- The waste rock will be transported to the spoil ground by strictly observing the traffic rules and minimizing traffic speed (5-20 km/hr). If necessary, the traffic will be regulated by specially trained staff;
- Boundaries of the selected area will be strictly controlled so that the waste rock is not disposed outside the perimeter and damage of the vegetation cover is avoided;
- After the spoil grounds are filled, recultivation works are planned over its slopes and surface, in particular, a topsoil layer will be provided and loosened;
- After the closure of the spoil grounds, the erosion processes will be supervised and appropriate corrective measures will be taken as necessary.

4.10.3 Supposed list of construction techniques

The construction of Algeti-Sadakhlo will use typical construction machinery commonly used in similar types of projects. Table 4.10.3.1 gives the probable list of the principal construction machinery to be used during the construction works. The precise list will be provided before the construction works start.


Table 4.10.3.1. Main techniques to be used during the construction works

Item	Approximate qty
Grader	2-3
Excavator	5-10
Excavator-based pneumatic drilling hummers	2-5
Bulldozer	2-5
Tractor	2-5
Bush-cutting machine	2-3
Derooting machine	2-3
Tree cutting machine	1-2
Crane with motor motion	2-3
Smooth roller	2
Pneumatic roller	2-3
Asphalt/concrete distributor	1-2
Motor-truck concrete mixer,	10-15
Dump truck	20-30
Vibrator	7
Hand drill	2-3
Mobile compressor (with pneumatic hammers)	2-3
Watering and washing machine	3-5
Road marking machine	2-3
Fuel transporter	2-3
High-sided truck	2

4.10.4 Sources of Construction Material

The expressway construction needs many material such as aggregate, sand, cement, steel, and bitumen. The project region is quite rich in the construction materials of inert materials (sand-gravel). There are several tens of duly licensed quarries operating in the region. Most of them are located in the Mtkvari River bed. Resources are also available in the gorge of Debeda river. Figure 4.10.4.1 shows the principal outcrops of sand and gravel near the corridor in blue (See also blue spots in Drawings 4.1.1. and 4.1.2). Mostly the carriers near villages Kirikhlo and Kvemo Saralis Azizkenda and Lejbadini will be preferred. It will not be necessary to transport the principal construction materials to far distances (the distance of transportation will mostly be 10-15 km maximum). Inert materials will be extracted in line of the terms of the relevant license.

Drawing 4.10.4.1. Location of the main outcrops of inert materials/licensed carriers

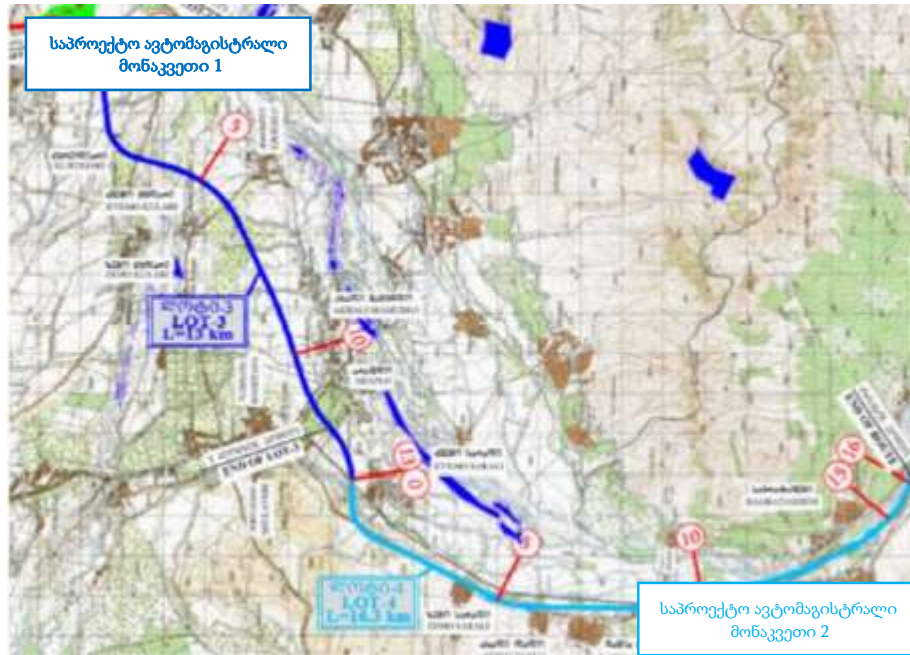

Besides, as the project organization suggests, it should be noted that a major portion of the material cut down during the earthworks will be used in fills. In such a case, the amount of originated waste rock will decrease on the one hand and the need to use natural resources of the inert materials will be diminished on the other hand. The quality of the cut materials will be tested at the laboratory before they are used in fills. As per the available information, most of the cut material is clay grounds, which will be suitable to be used for construction works after stabilization.

Pozzolana Cement is produced widely throughout the country. Consequently, the cement for the project will be supplied from the local sources.

Steel materials for bridges/viaducts, as well as bitumen is not available in the country. They will be imported from the neighboring countries. The best sources of bitumen import is Turkey and Azerbaijan.

4.10.5 Water Supply-Sanitation

During the construction of the design highway, water will be used for drinking and economic purposes and presumably, for preparing various construction materials and for periodic watering of the corridor. Vehicles will be washed at the car washing services operating in the region. Consequently, no technical water will be used to wash the vehicles and techniques.

The principal sources of drinking and economic water supply in the region are artesian wells and boreholes. As mentioned above, the camp territory has water supply. Supply reservoirs with sufficient capacities will be provided at the construction camps. Tank-cars or bottled water can be used for water supply of individual sites. Technical water will be mainly taken from the surface water bodies found near the construction corridor (Khrami River and Debeda River).

The amount of drinking and domestic water supply depends on the number of the staff employed for construction. The water consumption is calculated according to the construction norms and rules SNiP 2.04.01-85 "Internal Water Supply and Sewerage", and is 25 l per worker in one shift (8 hours).

The number of staff employed for the construction works will be 100. If considering that the works are accomplished in one shift and the number of working days a year is 260, the consumed amount of drinking and domestic water will be:

$$100 \times 25 = 2500 \text{ l/day, i.e. } 2.5 \text{ m}^3/\text{day}; 2.5 \times 260 = 650 \text{ m}^3/\text{year}.$$

The construction works will use technical water mainly to make concrete mix. Maximum rated capacity of a concrete mixer is 60 m³/hr. Maximum expected annual capacity with a one-shift work (6 hours) is 900 hr/year. Maximum annual design production will be consequently: 55 m³/hr* 900 hr/year = 49,5 thousand m³/year. On average 0,3 m³water is used to produce one cubic meter of concrete mix of different grades. Thus, the consumed amount of water will be:

$$60 \times 0,3 = 18 \text{ m}^3/\text{hr}. 18 \times 6 = 108 \text{ m}^3/\text{day}. 18 \times 900 = 16\,200 \text{ m}^3/\text{year}.$$

During the intense traffic of vehicles and techniques, particularly in dry weather, the regular watering of the construction grounds will be considered. The construction grounds will be watered with a special vehicle filling its reservoir presumably from a surface water object. The number of dry days in a year is taken as 60 only and maximum amount of water needed for watering the construction ground is taken as 50 m³. Consequently, the total amount of irrigation water will be 3000 m³/year.

As already mentioned, the inert materials will be ground and sorted by using the sub-contractors' operating plants, which will be installed on the material extraction sites. Thus, we do not take into account the amount of water used by the grinding and sorting plants.

Following the above-mentioned, the total amount of technical water to be used for the rehabilitation works will be:

$$650 + 16200 + 3000 = 19850 \text{ m}^3/\text{year}.$$

The approximate amount of technical water needed for various unforeseen cases (fires and the like) will not exceed 25000 m³/year.

The calculation of approximate amount of the domestic-fecal effluents is done by considering 5-10% of the consumed drinking and domestic water. The amount of domestic-fecal waters originated during the construction works will be 617,5 m³/year, i.e. 2,375 m³/day. The domestic-fecal waters on the territories of the camps will be emptied into the cesspit with approximate capacity of 20 m³. Mobile WCs will be used on the construction grounds. The accumulated fecal masses will be removed with a special vehicle and utilized in the nearest sewage systems (presumably the city of Rustavi. Besides, the sewerage system of Marneuli city is planned to rehabilitate in the near future).

The concrete unit ultimately uses the water to make a concrete mix and consequently, produces no effluent waters.

4.10.6 Relocating engineering and utility lines

Along the project road several public utility connections such as water, power, telephone, and gas were encountered. By contacting the relevant utility provider the network of utility lines were identified. Plans were developed for shifting the lines away from the project area.

The following technical solutions were suggested for the utility shifting:

- If the utility lines are running parallel to the road alignment the line shall be shifted beyond the limits of the impact corridor, in parallel to the road.
- If the utility lines are crossing the road cross section utility ducts of diameter 1.2m is

planned across the road cross section so that the lines could be run through without obstruction.

- The cross section of the utility ducts are similar to the normal culverts.
- The utility provider/ supplier shall be contacted by the nominated contractor to take their approval for the shifting to the comfortable zone away from the road right of way.

The consultant has addressed utilities interference in writing caused by rehabilitation work to the relevant agencies owned respective pipe utilities and received their official response including protective method. All requirements have been applied in detailed design drawing

Detail information for pipe utilities surveyed is given in the Table 4.10.6.1.

Table 4.10.6.1. Engineering-utility lines in the project corridor to relocate

Existing location, km of project corridor	To transfer to km of project corridor	Description	Note
Section 1 (Algeti-Mareti)			
1+900	-	High-voltage power transmission line	20 Ø
2+090	-	Power transmission line	8 m.
2+780	-	Power transmission line	Moving 8 m under the ground
4+580	-	Power transmission line	Moving 8 m under the ground
9+700	-	Power transmission line	Moving 8 m under the ground
10+900	-	Water pipes	Moving under the ground
11+100	-	Power transmission line	Moving 8 m under the ground
11+200	-	Power transmission line	Moving 8 m under the ground
11+220	-	Water main	Providing the culvert under the main road
11+220	-	Gas main	Providing the culvert under the main road
11+230	-	Power transmission line	Moving under the main road
11+850	-	Power transmission line	Moving
Section 2 (Mareti-Sadakhlo)			
0+300	-	Railway passage	-
1+240	-	Power transmission line	8 m
1+300	-	Power transmission line	8 m
6+300	-	Power transmission line	8 m
6+660	-	Power transmission line	8 m
9+100	-	Power transmission line	8 m
12+300	12+400	Irrigation channel	-
13+250	-	Power transmission line	Along the roundabout
13+850	-	Telecom line	Along the roundabout
14+8420	-	Telecom line	-

4.10.7 Traffic Management during Construction

Normal practice is for the Contractor to propose a Work Schedule and Methodology to the Engineer's Representative, which may include traffic diversions and traffic management as required. The Engineer's Representative must approve the Contractor's proposals before the work plan can commence.

As the project envisages the development of a new corridor for the project road and at the same time, secondary (ground) roads are During the traffic control , the relevant measures will be necessary along the final section of the project corridor, where the project envisages the development of the new highway in parallel to the old road.

The works on the give site will be accomplished within the limits of the corridor to widen in the first instance, when the traffic will run along old road. After the given stage is over, the traffic will shift to the new road and the works will start in the corridor of the old road. Providing temporary embankments is to be considered to provide adequate space for construction.

The priority in specifying the organizational procedures necessary for the road traffic will be given to the improved safety of the road and local infrastructure. All locations where the construction works are planned near the traffic flows, will be clearly marked in the technical draft of traffic organization, and physical barriers will be installed between the construction sites and the traffic flows.

Similarly, the temporary objects and/or diversion routes for each local road, along which the traffic may be hampered during the construction will be shown in the complete technical design. For such sites, small-scale measures for traffic covering the construction period will be developed.

4.10.8 Temporary access roads

The local roads are quite well developed in highway corridor. There is a network of ground roads running between the agricultural plots. Presently, heavy techniques can also move through the corridor planned on Iagluja Plateau. However, the construction works of this section will be mainly accomplished from the starting and last points, in an on-coming direction. The main (key) highway in the construction phase is the existing E60 road from Rustavi to Red Bridge. Thus, the project virtually does not envisage cutting the temporary ground roads for the consequently purposes.

4.10.9 Recultivation of the temporarily used areas and hard shoulders

After the construction of the project road main is complete, the recultivation works will be accomplished. These works imply the restoration of the temporarily used areas and putting them to their original state to the extent possible. One of the principal guiding documents of the recultivation works will be Decree №424 of the Government of Georgia, Technical Regulation – on "Topsoil Removal, Storage, Use and Cultivation". The recultivation works will be accomplished mainly along the road shoulders (slopes of the embankments formed for the roadbed) and on the camp areas. The recultivation and landscape harmonization works will use topsoil, which will be stripped in the project corridor and stored separately until the onset of the earthworks.

4.10.10 Road construction works - summary

The highway construction process itself involves different types of activities, in particular:


- Earthworks.
- Providing and profiling exits and drainage canals and side drainage pipes/cuvettes.
- Supplying inert material to the roadway locations with trucks and profiling the layers to form the roadway and compacting it.
- Soil stripping to the required level and compacting it with heavy techniques on the ground stripping sites.
- Following the placement of surface layers (with materials: sand, asphalt, gravel, concrete, etc.), placing the ready concrete with special vehicles to provide the road pavement.
- Concrete works, building foundations and bridge structures.
- Construction of bridges.
- Road construction and providing the marking compliant with the international standards.
- Landscape harmonization/recultivation.

5 NATURAL AND SOCIAL-ECONOMIC STATE OF THE PROJECT CORRIDOR – BACKGROUND PROPERTIES, FIELD STUDY RESULTS

5.1 Physical-geographical and administrative location

In a physical-geographical respect, this territory covers Kvemo Kartli Plain, which is an extreme north-western part of Kura-Araxes vast Plain. The alluvial plain is located on both banks of the river Mtkvari and bordered by the slopes of Trialeti and Lokhi Ridges, Shua Khrami mountain group and Iori Plateau.

Below, the location of the project implementation site is shown on the physical map of Georgia.

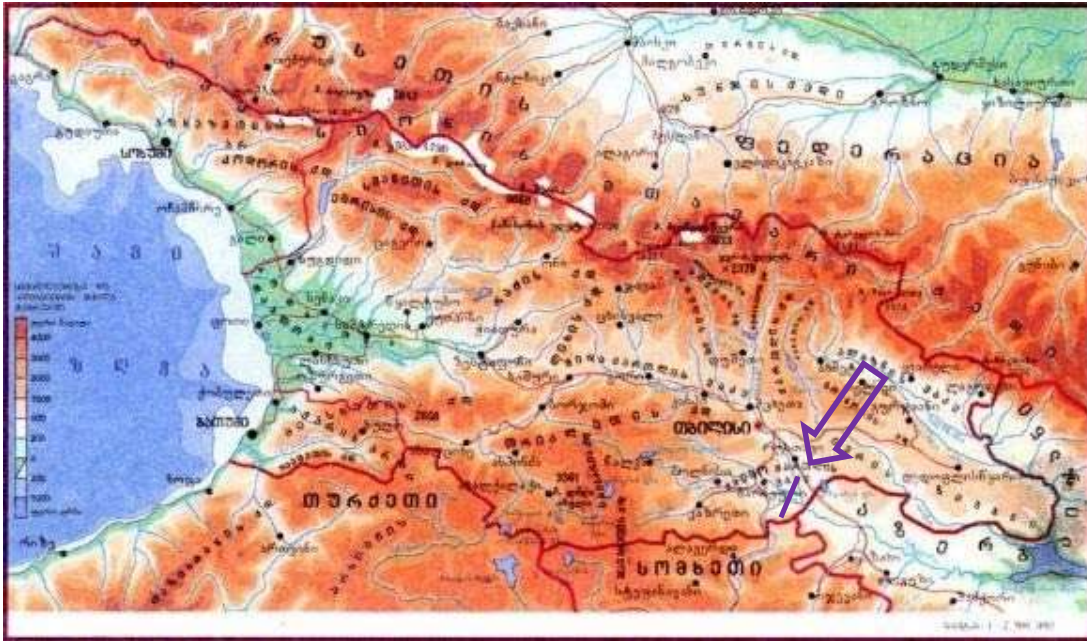


Drawing 5.1.1. Location of the study corridor on the physical map of Georgia

According to the administrative-territorial division of Georgia, the main part of the project corridor belongs to Marneuli Municipality. Marneuli Municipality is located within the administrative borders of Kvemo Kartli. It is located in south-eastern part of Georgia. From north, it is bordered by Tetrtskaro Municipality; by Gardabani Municipality from the north-east and by Bolnisi Municipality from the west. Southern border of Marneuli Municipality coincides with Georgian-Armenian border and its eastern border coincides with state Georgian-Azerbaijan border.

The drawing below shows the location of the project corridor within the borders of Rustavi and Marneuli Municipality.

Drawing 5.1.2. Location of the project corridor in relation to the administrative units

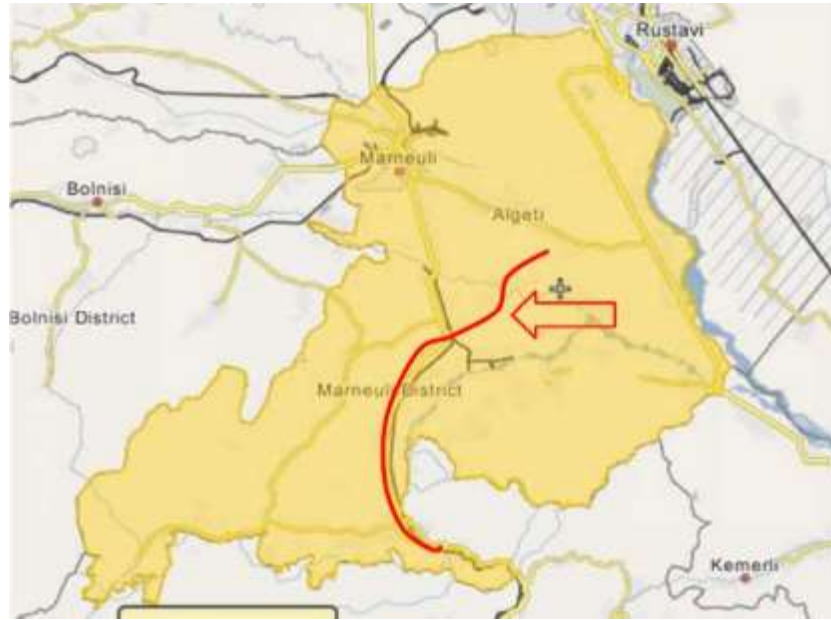

The following paragraphs give the description of the social-economic conditions by considering the location of the project corridor described above.

5.2 Description of natural environmental objects

According to monograph “Spatial and time analysis of the landscapes of Georgia” (Dali Nikolaishvili; Iv. Javakhishvili Tbilisi State university - [Tb.], 2009), two types of landscape can be identified in the project corridor:

1. Plain-hilly accumulative landscape with semi-desert and steppe vegetation, rarely with shybliak (Landscape 22);
2. Accumulation and valley landscape with tugai and meadow herbs, rarely with swamps and salty areas (Landscape 51);

Below we give the general description of the given type of landscape, while the following paragraphs describe its individual components within the limits of the project corridor and adjacent areas.

1. Plain-hilly accumulative landscape with semi-desert and steppe vegetation, rarely with shybliak (Landscape 22):



Name of landscape: Gardabani-Marneuli.

Location: Is spread over Kvemo Kartli Plain. It is also spread on the territory of Azerbaijan.

Administrative regions: Gardabani, Marneuli, Tetrtskaro.

Area: 0,37 thous. km² (0,53% of the total area of Georgia).

Bordering landscapes: Plain-lowland (65 %), low mountain (19 %), lower mountain (16 %).

Relief: Accumulative and erosive-accumulative. It is presented by the plain inclined south-east, rarely terraced. Hilly surfaces occur at some locations as well.

Migration regime: Accumulative, Elluvial-accumulative, super-aqual.

Geology: Molassa formations. Alluvial-Prolluvial and Alluvial- Delluvial deposits.

Climate: Subtropical, semiarid, slightly Continental.

Soils: Dark, grey-brown, carbonic calcium, salinated. Mechanical composition: common clay-containing; Heavy loam at greater depths. The density also increases as the depth increases. Clay content and heavy loam is also characteristic to the salinated soil. However, the mechanical composition is lighter at greater depths. Consolidated horizon is fixed in the middle layers. Depressed horizons have particularly poor filtration properties.

Vegetation cover: The floristic composition is poor. Xerophilous prick herbs are typical.

Vertical structure of the natural-territorial complex: dominating type is III occupying almost all the territory of the landscape.

Amount and supply of geomasses:

Geomasses	A	P2	Pi2	M2	Mv2	Ml2	Sab	S100	L100	Hua b	Hu1 00
Mean valaue	15	20	1,5	1,1	1,1	0	4300	6000	1300 0	65	87
Supply, mln t	0,6	0,38	0,06	0,04	0,04	0	288	402	871	2,2	2,9

Type of anthropogenic transformation: The landscape is changed almost all over the territory. It is covered with dense irrigation channels and is presented by agricultural plots (vegetable, fruit, winter pastures). The ecological situation near the roadsides and settled areas is severe. The use of pastures, irrigation systems and agricultural plots has changed the ecosystems significantly.

Degree of anthropogenic transformation: Almost totally transformed.

Number of experimental plots- 3.

The given landscape is most common in the project corridor.

2. Accumulation and valley landscape with tugai and meadow herbs, rarely with swamps and salty areas (Landscape 51):



Name of landscape: Floodplain

Location: Is spread along the gorges of big rivers in Eastern Georgia, in the floodplains and adjoining terraces, as well as along the irrigation systems (of a secondary origin) as a narrow strip. Their propagation on the background of dry climate – steppes and semi-desert ecosystems is the result of additional humidification of ground and soil what is associated with relatively high levels of ground waters.

Administrative districts: Khashuri, Kareli, Gori, Kaspi, Mtskheta, Akhgori, Dusheti, Tetrtskaro, Dmanisi, Bolnisi, Marneuli, Gadrabani, Akhmeta, Telavi, Sagarejo, Gurjaani, Signagi, Dedoplistskaro

Area: 1,655 thous. km² (of the total area of Georgia 2,4 %).

Bordering landscapes: Plain-valley (50%), low-mountain (20%), lower-mountain (10%), middle-mountain forest (9%), upper-mountain forest (1%), high-mountain plateaus (10%).

Relief: This is presented by accumulative plains and basins, with hydromorphic and sub-hydromorphic regime. It is a slightly inclined plain.

Modern geomorphological processes: Alluvial processes.

Migration regime: Super-aqual.

Geology: Quaternary sediments: loamy clay and carbonate. The soils are high-productive with rich harvest.

Climate: Average annual air temperature 12⁰C. January -0,3⁰C, July 25⁰C. Total annual atmospheric precipitations 360 (Red Bridge) - 510 (Bolnisi) mm. the maximum falls in May-June having a positive affect on the productivity of the agricultural crops.

Soils: Alluvial.

Vegetation cover: Tugai forests, meadows, rarely swamps and salty areas are spread here, what is mostly due to incorrect irrigation. It represents a 25-30-meter-high tugai forest, with a sub-forest, with curly herbs and thick grass cover forming a single grass cover at some locations. Shrubs are spread along the forest edges and in the woodcut areas.

Types of geomasses: A, Pt, Pf, Pi, Pg, Ps, Z, Ml, Mm, Ssa, Ls, Hg, Hs.

Occurrence ratio of geomasses: -0,75. The conditions are particularly favorable for mortmass accumulation due to less intense degradation of organic substances. Its average amount is 50-60 t/ha (Mo). The occurrence of stexes favorable for mortmass accumulation is 45-50%.

index of intensity of the biological circulation - 20-50.

Type of anthropogenic transformation: The floodplain forests were spread along almost all big rivers in Eastern Caucasus in large areas in the past. However, today, these forests are almost completely destroyed and are preserved only as small plots of plantations. They are replaced by the secondary grasses and shrubs and agricultural plots – cereals, fruit gardens and vineyards giving quite rich harvest.

Degree of anthropogenic transformation: Almost completely changed

Some sites of the project corridor running near the rivers or crossing them (mainly rivers Khrami or Debeda) can be attributed to the given type of landscape.

5.2.1 Microclimatic properties

Marneuli Municipality is located in the humid subtropical climatic zone with the climatic zoning corresponding to its relief. The climate in the most part of the territory is a warm steppe one. These areas are characterized by not severe winter and moderate, hot summer. Below are the climatic properties of the study area based on the meteorological data of Rustavi and Marneuli weather stations (Source: Construction norms and rules “Construction Climatology”).

Table 5.2.1.1. Average monthly and annual air temperature⁰C

I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	წლ.	აბს. მინ. წლ.	აბს. მაქს. წლ.
Marneuli														
0,0	1,9	6,0	11,5	16,8	20,6	23,9	23,5	19,0	13,4	7,0	1,9	12,1	-25	40

Table 5.2.1.2. Extreme air temperature⁰C

Average maximum of the hottest month	The coldest five days	Average of the coldest month	Average of the coldest period	Period with average monthly temperature <8 ⁰ C		Average temperature at 1:00 pm	
				Duration, days	Average temperature	for the coldest month	for the hottest month
Marneuli							
30,3	-9	-12	-0,1	139	2,7	3,8	29,9


Table 5.2.1.3. Air humidity,%

I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	საშ
Marneuli												
75	72	70	66	67	64	60	60	67	74	78	77	69

Average relative humidity at 1:00 pm		Average daily amplitude of relative humidity	
In the coldest month	In the hottest month	In the coldest month	In the hottest month
Marneuli			
61	65	22	25

- Annual amounts of atmospheric precipitations are: - 495mm;
- Daily precipitation maximum: - 146მმ;
- Weight of snow cover: 0,50Kpa
- Number of days with a snow cover: -17;
- The wind properties as per the data of weather station are as follows:
 - – wind with velocity of 17 m/sec is expected once a year;
 - wind with velocity of 23 m/sec is expected once in 5 years;

- wind with velocity of 31 m/sec is expected once in 10 years;
- wind with velocity of 25 m/sec is expected once in 15 years;
- wind with velocity of 26 m/sec is expected once in 20 years;
- maximum and minimum wind velocities:
 - January – 2,6/0,6m/sec
 - July – 4,5/1,3 m/sec;
- The wind properties as per the data of Marneuli weather station are as follows:
 - wind with velocity of 17 m/sec is expected once a year;
 - wind with velocity of 23 m/sec is expected once in 5 years;
 - wind with velocity of 24 m/sec is expected once in 10 years;
 - wind with velocity of 25 m/sec is expected once in 15 years;
 - wind with velocity of 26 m/sec is expected once in 20 years;
 - maximum and minimum wind velocities:
 - January – 2,6/0,6m/sec
 - July – 4,5/1,3 m/sec

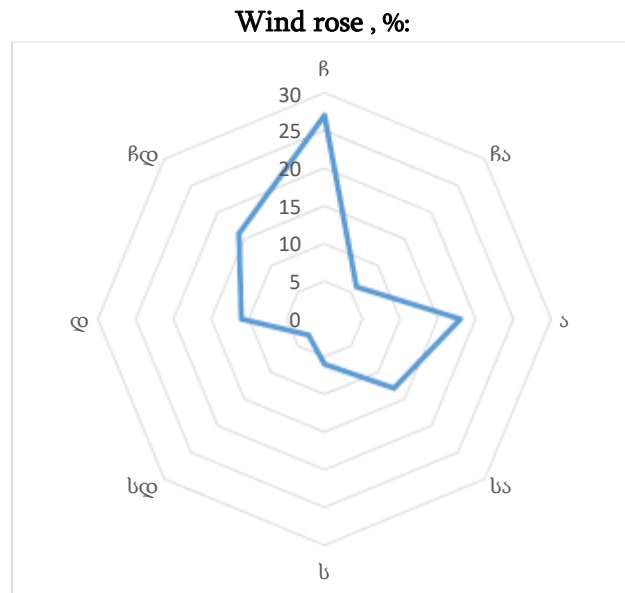

As the data above show, the project area has no particular extreme climatic conditions hampering the construction of the highway.

5.2.2 Climate change

The known likely impacts of climate change on the climate of individual locations are:

- a) Changes in Temperature
- b) Changes in Precipitation
- c) Changes in Humidity

Figure 5.2.2.1: Georgia - Main Hazard Risk areas¹

The Bank requested the promoter to produce a climate risk and vulnerability note assessing the risks to the project resulting from climate change.


The Aware climate risk screening identified the final project climate risk rating as “Low risk”, with the risks of flooding, snow loading and landslide identified as “low risk from climate change”.

a) Changes in Temperature

Current climate change was assessed based on observations of 33 stations of hydro meteorological network of Georgia, in the period of 1961-2010, while the forecast scenarios for 2021-2050 and 2071-2100 were developed using regional climate model RegCM454. Basically, the following climate parameters were examined: mean annual temperature, total annual precipitation, average wind speed and relative humidity, as well as extreme climate indexes (SU25, TR20, ID0, FD0, Rx1day, Rx5day, R50mm, R90mm, CCD and CWD55). Average values calculated in each period for different climate parameters were compared, and the trend (increase, decrease) and the nature of territorial distribution were identified. Seasonal and annual trends were determined and their statistical reliability was assessed.

¹ CLIMATE RISK IN GEORGIA: COUNTRY PROFILE – USAID, 2017.

Figure 5.2.2.2: Change of average annual temperature:: b) 1986-2010 and 2021-2050; c) 1986-2010 and 2071-2050

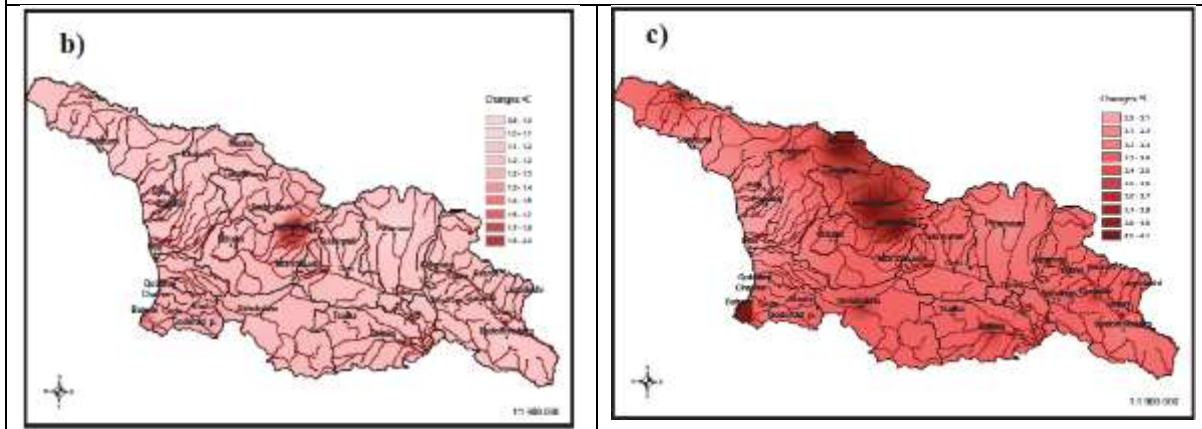


For a road project, the main aspects of climate change that are likely to impact on the project are:

b) Changes in Precipitation

Sustainable trends of the increase of precipitation are basically observed in West Georgia, especially in its mountain areas. This trend will be increased until 2050, and after that the decrease will be started, except for some areas (Batumi, Pskhu and Mta – Sabueti). In East Georgia decreasing trend is changed to increase and by 2050 the growth of precipitation on the average by 3, 4% is expected; However Lagodekhi is still an exception and the precipitation decrease by 6.3% is predicted (Figure 3. b). Significant decrease of precipitation is expected by 2100 on whole territory of Georgia, mostly in Samegrelo, Kvemo Kartli and Kakheti (22%). Central part of Likhi Range, where total annual precipitation is being increased by 93% is an exception in this period (Figure 3. c).


Figure 5.2.2.3: Maps of total annual precipitation change between the periods of b) 1986-2010 and 2021-2050; c) 1986-2010 and 2071-2100

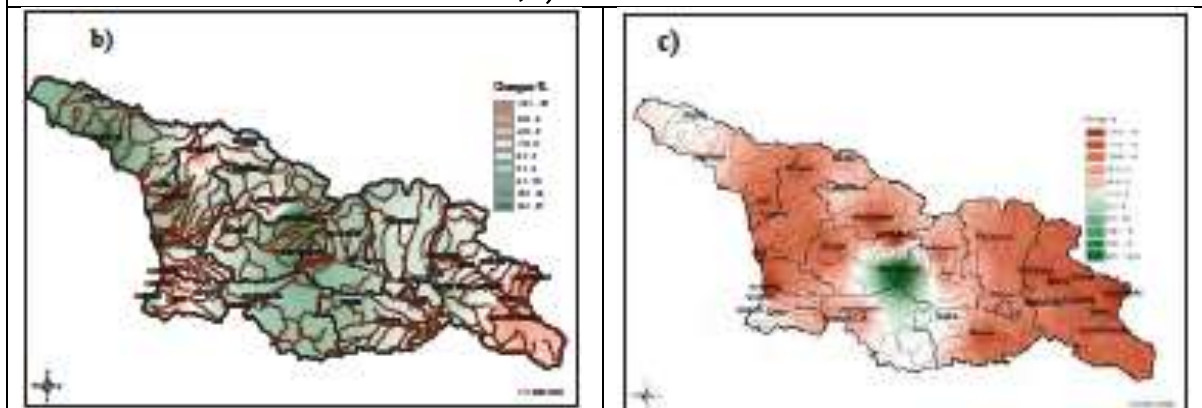

c) Relative humidity

Relative humidity has basically increased by 2% on the whole territory of the country, between first and second periods. The biggest increase (5.4%) with sustainable trend is recorded on Goderdzi Pass. This increasing trend will be changed by decreasing on the majority of stations by 2050 and 2100. There are some exceptions, where this parameter will continue to rise significantly: Khaishi (4.7%), Keda (4.6%) and Mestia (2.2 %) (see Figure 4. b, c).

Figure 5.2.2.4: Change of average annual values of relative humidity between the periods of: b) 1986- 2010 and 2021-2050; c) 1986-2010 and 2071-2100

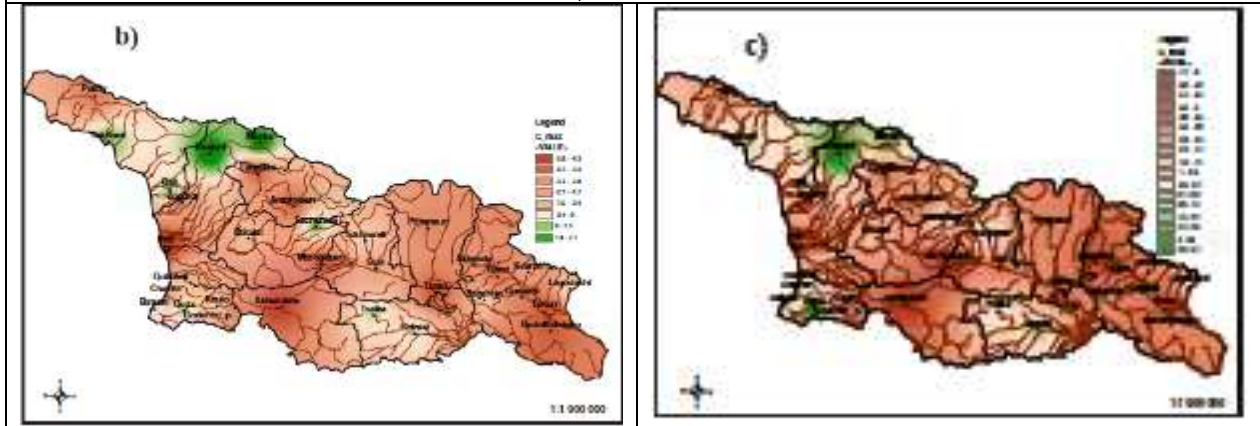

Summary of Climate Action Calculation

The estimates of the climate adaptation measures under the project have been provided by the promoter and calculated by the Services over the project investment cost as defined by EIB.

The promoter’s climate adaptation cost to adapt the project to the risks of (i) flooding and runoff; (ii) mass movement and erosion, have been calculated as follows (For Rustavi-red Brdige Road Section):

A	B	C	D	E	F
Project component with Climate Action	Total Component Investment Cost (M.GEL)	% of compon ent cost to total for CA	Cost GEL	Cost EURO	Budget Line
Lot 3					
<u>Earthworks</u> (0.3 % Total Component Investment Cost)	24	0.3%	73 160	24 145	Construction Contractor
<u>Culvert, Drainage and Underpasses</u> (0.1% Total Component Investment Cost)	1	0.1%	1 103	364	Construction Contractor
<u>Bridges</u> (1.8% Total Component Investment Cost)	8	1.8%	143 553	47 337	Construction Contractor
Lot 4					
<u>Earthworks</u> (0.3 % Total Component Investment Cost)	18	0.3%	55 112	18 189	Construction Contractor
<u>Culvert, Drainage and Underpasses</u> (0.1% Total Component Investment Cost)	1	0.1%	1 054	347	Construction Contractor

<u>Bridges</u> (1.8% Total Component Investment Cost	10	1.8%	180 412	59 542	Construction Contractor
--	----	------	---------	--------	-------------------------

5.2.3 Geology

5.2.3.1 Geomorphological conditions

Kvemo Kartli is bordered by the slopes of Trialeti and Lokhi Ridges; its western border is the northern part of Samsari Ridge and Javakheti Ridge; its eastern border is Samgori and Davit Gareji mountain ridges, in northern border is Trialeti Ridge, while in the south, Loki Ridge isolates Kvemo Kartli from Armenia.

The greatest (central) part of Marneuli Municipality is occupied by Marneuli accumulative plain (Borchalo Plain) with its height of 270-400 m, length of 40 km, the greatest width of 20 km. The Plain is bordered by Iagluja Plateau from the north, by Loki Ridge and Babakara Hillock from the south, by Mtkvari River from the east and Mashavera Gorge follows along its western edge to the city of Bolnisi.

The general inclination of Plain is directed south-east – almost in parallel to Mtkvari River. The surface of the Plain is flat and has a dense net of gorges of rivers Algeti, Khrami and Debeda. The gypsum clays constituting the river terraces show pseudo-karst events, what is seen in the relief as piping holes, wells and caves, as well as natural bridges.

In a geomorphological respect, the basin of the Debeda River is divided into mountain and plain zones. High-mountainous zone is located on the territory of Armenia, and the low zone starts near village Sadakhlo and is on the territory of Kvemo Kartli Region (on Marneuli lowland or along the project corridor).

Immediately in the project corridor, the relief is less dissected. The absolute heights of the corridor vary between 310-450 m asl. The initial section of the alignment runs across lower levels: 310-350 m, then gradually increase and reach 450 m near village Sadakhlo. Overall, the corridor is located within the plain relief. A hilly section near village Sarali is worth mentioning at the following coordinates: from x485874; y4577643 to x484341; y4576277 (See Figure 5.2.3.1.1.).

Figure 5.2.3.1.1. A relatively heterogeneous relief within the project corridor



5.2.3.2 Geology


Stratigraphically, the project area is presented by Paleogenic and Neogenic rocks, with Middle Eocene volcanogenic-sedimentary rocks being oldest of them. They are continued by Upper Eocene, Oligocene and Lower Miocene rocks with stratigraphic concordance.

The oldest deposits – the Upper Eocene stratum – is presented by fine-grain, thick-layer sandstones. The degree of lithification of Oligocene rocks is low here and they are presented by stratified clays, though of hard consistence. As for the Lower Miocene stratum, it is presented by dark grey argillites, with thin interlayers of argillites and siltstones.


Paleogenic-Neogenic rocks in the study region are covered with a layer of varying thickness of the Quaternary grounds of various genesis. The thickness of the layer of the Quaternary clay grounds is relatively more on the plains of Mtkvari terraces, where their accumulation is associated with the movement of temporary surface waters. The Tertiary formations are mainly made up of: sandstones, clays, conglomerates, sometimes, marls and limestones. In particular, the objects itself is located in the region, where the upper layer is mainly presented by a thin alluvion layer (gravel and shingle), which lies on hard rocks (sandstones of different degrees of cracks, etc.).

A part of the geological map related to the project area is given in Drawing 5.2.3.2.1. The geological map shows that mainly alluvial lowland presents all along the project corridor with Quaternary and Modern alluvial formations: shingle, conglomerates, sands and clays. Longitudinal engineering-geological sections of the project corridor are given in Annex 2.

Figure 5.2.3.2.1. Geological map of the project area

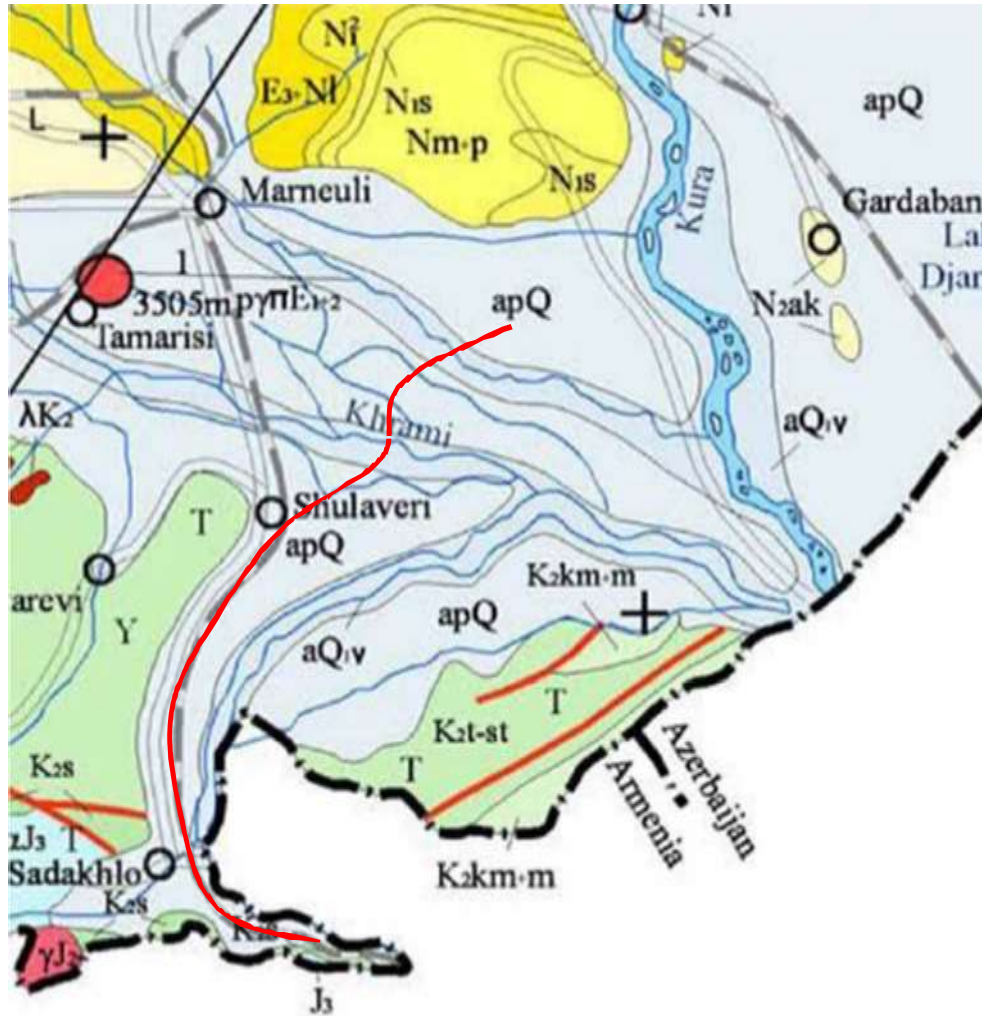


Legend




Q-Quaternary system (undismembered). Genetic types of deposits: a-alluvial, m-marine, am-alluvial-marine, I-lacustrine, Ia-Lacustrine-aaluvial, Im – Lacustrine-marine, ap-alluvial-proluvial, pd- proluvial-talus deposits: coarse gravels, blocks, gravels, sands, conglomerats, clays, loams, g-glacial: apg-alluvial-proluvial-glacial (fluvioglacial) deposits: boulder-coarse gravel accumulation, loams, sands, aC-subbaerial calc-alkalic andesites, decites, andesite-decites



Qv-contemporaneous deposits; a-alluvial, am-alluvial-marine, m-marine, Im-lacustrine-marine, p-proluvial, ap-alluvial-proluvial, Ip-lacustrine-proluvial deposits: coarse gravel, sands, clays, sometimes peat bogs.



Nm-p Meotian and Pontian stages. Marine and continental molasse: conglomerates, sandstones, clays.



Sarmatian stage. Marine and continental mpasse: sandstones, clays, conglomerates, sometimes marls.

5.2.3.3 Hydro-geology

According to the hydro-geological zoning of Georgia (I. Buachidze, 1970), the project highway corridor belongs to the Marneuli-GARDABANI artesian basin (III12).

Considering the geological characteristics, groundwater flow generally occurs within the quaternary alluvial-proluvial deposits - shingle, conglomerates, sands, sandstones, loamy clays, as well as from the water-bearing horizons containing modern alluvion formations. The springs associated with these deposits are mainly of a low yield. The underground water currents circulate in the packs of Old Quaternary formations mainly to the depth of 20 m, which are mainly formed at the expense of the irrigation systems.

With their chemical composition, the waters of the Old Quaternary deposits are sulfate-hydrocarbonate calcium-sodium-manganese, with their general mineralization varying within the limits of 1.0-10.0 g/l and within the limits of 0.5-1.5 g/l in modern deposits.

The ground water within the scope of the project corridor flows through the alluvial-proluvial deposits of the Quaternary Age as per the geological plan. There are more than one water surfaces fixed along the study section. Due to the content of silt and clay in the layer, the ground waters outcrop and established levels differ from one another.

Generally, as per the common practice, maximum ground water level may be said is 2 m higher than the ground water level measured during the low-water period.

Particularly noteworthy is the situation in the vicinity of the water flowing near Mtkvari River. As a rule, the level of Mtkvari River influenced the ground water level. Generally, during the river low-water, the ground water is absorbed by the river and during the abundant-water periods, the ground water is accumulated. The studies on the site were accomplished during the low-water period of the river and during the season of a low ground water level. Ground water flows along the river current. In the abundant-water period of the river, the ground water level may much exceed the fixed level.

Ground water outcropped in all boreholes provided along the study section (see table 5.2.2.3.1.).

Table 5.2.3.3.1. Topographical data of ground waters

Borehole No.	Ch.	From Center alignment, m		From Center alignment, m		Height, m	Ground water level (established), m	Height, m
		Left side (LHS) m	Left side (LHS) m	x	y	z		
46	0+166	4.00		496684	4583538	321.00	3.6	317.6
47	1+50	4.00		495810	4583387	323.00	4.5	318.2
48	2+63		25.00	494804	4583307	326.00	3.6	322.4
20	3+223		5.00	493879	4582685	324.00	3.2	318.2
21	3+359		14.00	493822	4582559	320.00	11.5	
23	3+561		3.00	493777	4582362	308.00	3.2	305.0
49	4+367		1.50	493553	4581588	312.00	6.9	305.1

50	5+771	CL	CL	492763	4580451	320.00	6.8	314.3
51	6+980	CL	CL	491703	4579881	326.00	5.5/8.2	320.6
52	8+300	39.00		490490	4579355	331.00	2.3/6.5	324.8
53	9+730	180.00		489141	4578834	339.00	9	
15	11+211		2.50	487800	4578364	343.00	2.4/6.6	340.8
18	0+443		77,0	485 894	4 577 667	359,00	8,4	350,9
17	0+473		76,0	485 863	4 577 668	360,00	4,8	353,5
60	10+536		6,5	482 862	4 568 795	404,00	7,8	396,8
14	13+214		29,0	483 543	4 566 210	416,00	2,2	414,2

5.2.3.4 Tectonics and seismicity³

The research region of the object and surrounding area includes three major tectonic units and five sub zones of the Caucasus: Greater Caucasus fold-thrust belt, (Southern Slope zone of Greater Caucasus); Transcaucasian intermountain lowlands (Kura foreland); Lesser Caucasus (Achara-Trialeti fold-thrust mountain belt, Artvin-Bolnisi block, Loki-Garabagh zone).

The significant seismicity of the investigation territory is mainly linked to the block structure of earth crust and the seismic activities of the eastern ending of the Adjara-Trialeti mountain belt and Artvin-Bolnisi block (especially of Khrami-river basin).

According to the acting normative document in Georgia PN 01.01-09 - “Earthquake Engineering” (Georgian building code, 2009) the design object is located in the MSK intensity VIII seismic zone with the maximum horizontal acceleration value 0.18 g. However, modern investigation of probabilistic seismic hazard based on international standards (for example, the EMME project of the Global GEM Program) have shown that the acting normative seismic hazard map of Georgia (PN 01.01-09 “Earthquake Engineering”) (especially by PGA) is not correct and significantly decreases the real expected seismic hazard in terms of PGA. Thus, before establishing new norms like Eurocodes it is important to evaluate PGA and SA values individually for each significant object.


According to the above said the investigation area is considered as the territory, the boundaries of which are 50 km far from the location of the design object and covers every main seismically active zone of the above mentioned morphological elements.

To establish regularities of seismicity in the investigated area, primarily on the basis of seismic database of the M. Nodia Institute of Geophysics, TSU the following catalogues and sets were compiled: 1) catalog of all fixed earthquakes; 2) catalog of moderate and strong earthquakes $M_S > 3.5$ in the same period; 3) catalog of macroseismic data of strong earthquakes and set maps of isoseismals; 4) catalog of parameters of active faults, and 5) set models of the equation of predicting strong motions (GMPE models).

On basis of these data, the maps of epicenters were constructed for investigated area. They show the density of distribution of earthquakes of various magnitudes. There are presented all earthquakes from the pre-instrumental period to 2018 that are indicated in catalogs. For moderate and strong earthquakes ($M_S > 4.5$) the date of occurrence is also indicated.

³The Report was developed for the bridge design planned across river Khrami within the scope of E60 Highway

Figure 5.2.3.4.1. Map of moderate and strong earthquakes epicenters ($M > 3.5$).

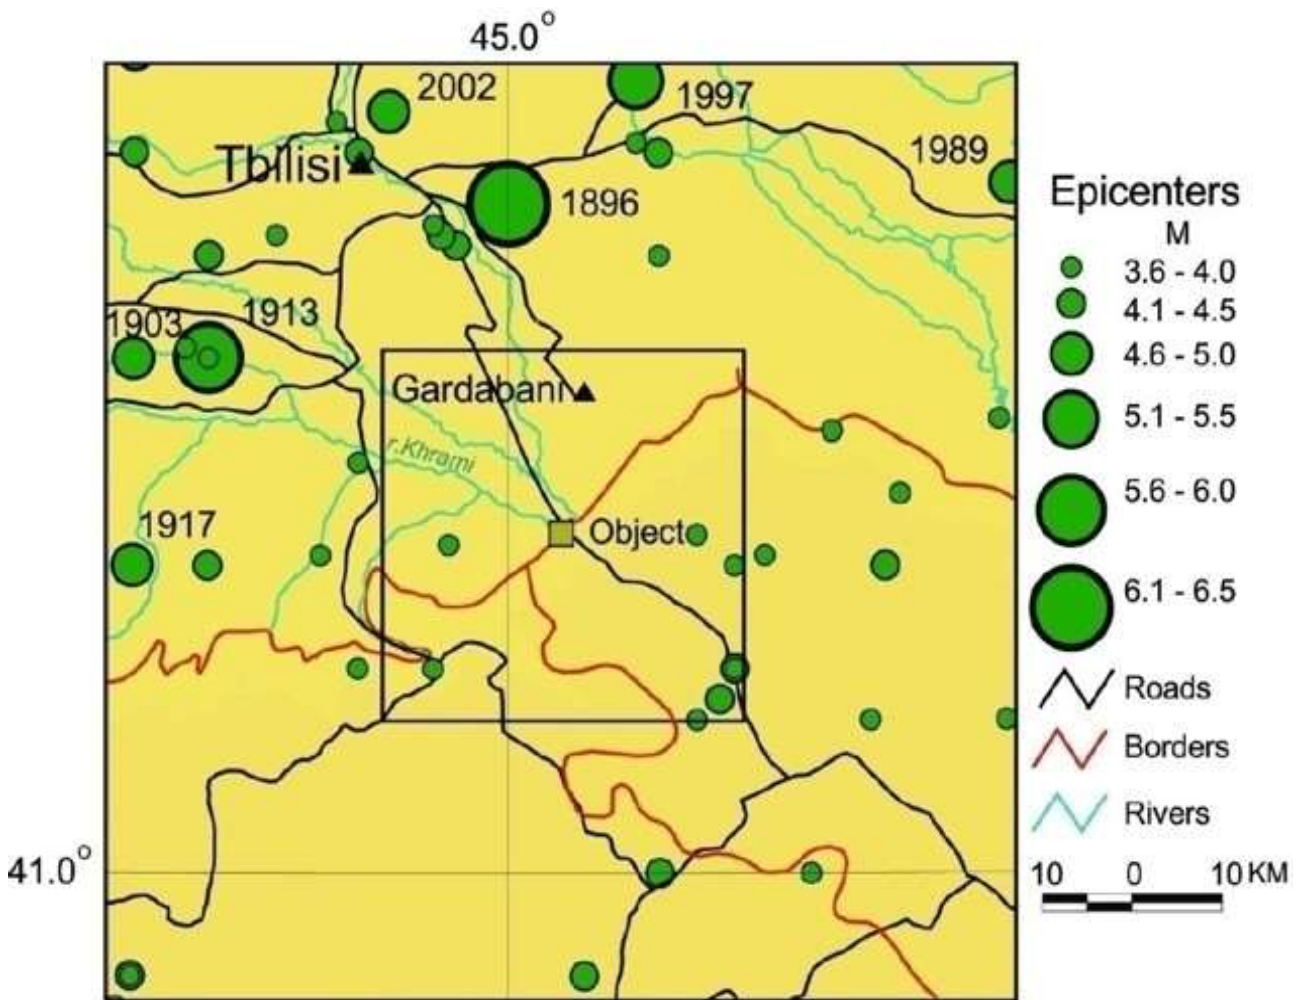

Analysis of obtained maps show seismological condition of the investigated area. In particular, according to a map of moderate and large earthquakes epicenters, the whole area is covered with earthquake epicenters with various densities. The most concentration areas of epicenters are observed in the north-western segments of the area, which is connected to the eastern edge of Adjara-Trialeti Mountain Belt and Artvin-Bolnisi block.


It is noteworthy that the strongest historical earthquakes have great influence on the seismicity of the region, especially when considering the seismicity of the building territory of the object.

Seismically active faults and seismic source zones (SSZ) of the area

Detail seismic investigation of the given area requires the study of seismotectonic conditions regularities. The result of such investigation is separation of seismic source zones (SSZ). The methods of SSZ division, used in this work (Varazanashvili, 1989, 1998), based on the wide range of geological-geophysical and seismological data. Its conceptual base is complex block structures of the earth crust of Georgia territory. Continuous deformation caused by endogenous process takes place in the earth crust. In this condition the inhibition of block relative motion take place on some transition zones of blocks. This causes the creation of the areas, where the elastic potential energy is accumulated. This energy can be released by the sudden rupture or by the earthquake. Very important is specify the spatial location of intrablock transmission zones to establish the SSZ or potential places caused strong earthquakes. To solve this problem it is essential to have data of active faults for investigated area.

The area considered in this report 10 relatively large seismically active faults (fault zone, FZ) revealed on the basis of geological, geophysical, morphological and seismological data (Fig. 5.2.2.4.2). Here is a list of fault zones (FZ) passing through the territory of Georgia (G), Azerbaijan and Armenia and numbered from 1 to 10: Orkhevi (G1), Eldari (G2), Taurtepe (G3), Udabno (G4), Tbilisi (G5), Teleti (G6), Khrami North (G7), Khrami South (G8), Loki North (G9), Dmanisi (G10). Brief description of the mentioned faults is set out below by Adamia et al. (2008) and Sesetyan et al. (2017).

Drawing. 5.2.3.4.2 Seismically active faults zones (FZ) of the investigation area.

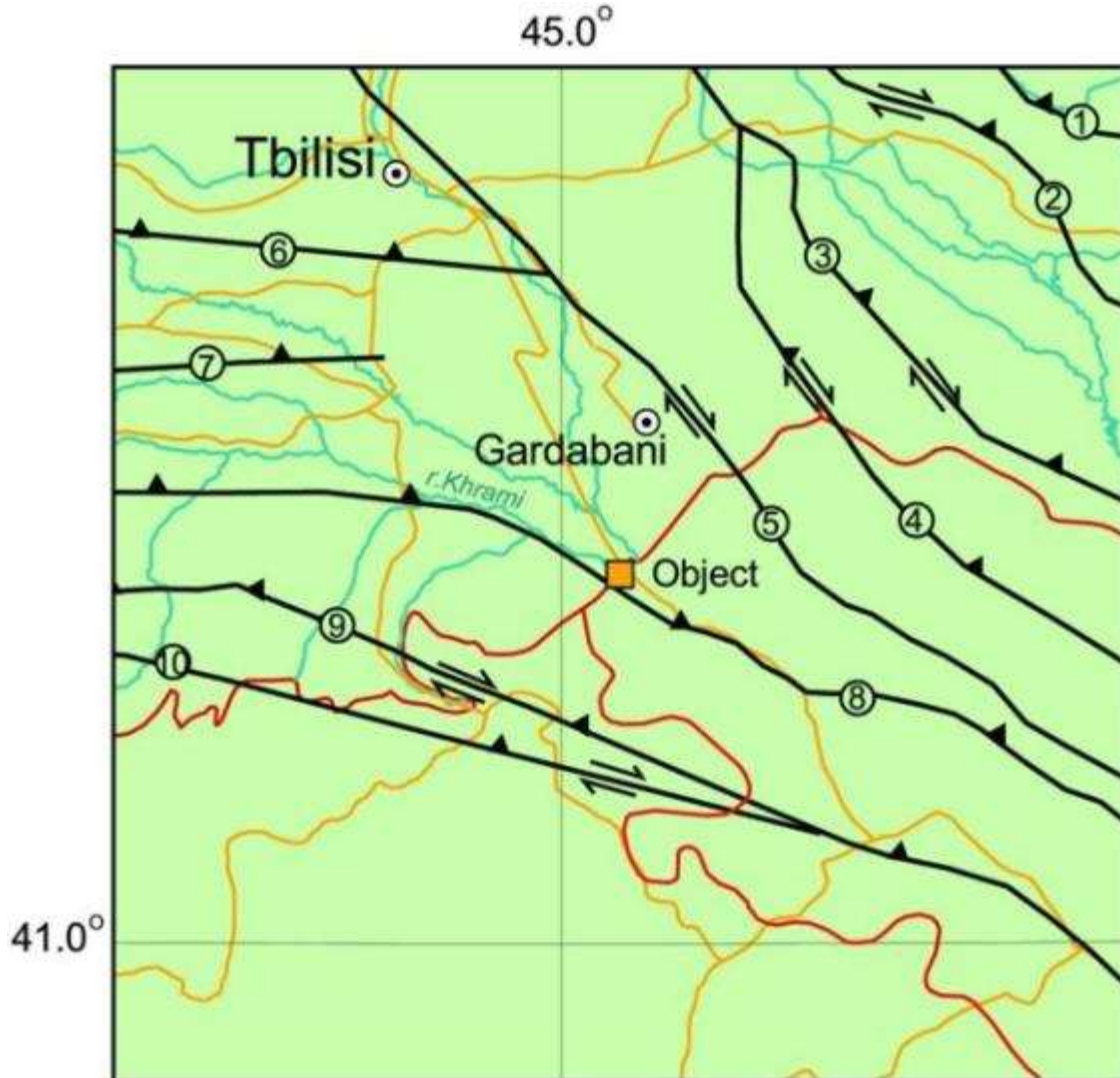

Conclusions and Recommendations

During past historical period the highest seismicity (intensity 6-8 MSK) on the territory of the object were formed by the strongest earthquakes of regional type. While weak instrumental earthquakes near the object confirm the modern seismic activity of this area.

10 seismically active faults have been studied for determining regularities of the seismotectonic conditions or for allocation of seismic source zones (SSZ). They were identified using geological, geophysical, geomorphological and seismological data.

Using active faults, identified by complex data, map of seismic sources zones has been created, which describes potential seismic capabilities of the area. 10 SSZ were allocated in the region, which were differentiated with six magnitude ranges and 0.5 steps ($5.0 \leq M_{max} \leq 7.5$). SSZ parameterization was done.

Seismic hazard analysis for the study area was done using probabilistic methods for peak ground acceleration (PGA) and spectral acceleration (SA) with a period of 0.2, 1 sec, at rock ($V_{S30}=905$ m/sec), to 1000 year recurrence period and 75 year waiting time. For calculations well known European and USA software (OPENQUAKE and EZ-FRISK™) were used.

Probabilistic values of ground motion PGA for horizontal and vertical components, which correspond to 1000 year recurrence period, in 75 year waiting time, were (see table 2): at rock: $PGA_H=0.37$ g, $PGA_V=0.28$ g.

For study area magnitude-distance deaggregation results for 1000 year recurrence period (75 year waiting time) is given in table 3. The deaggregated results (see Table 3) of probabilistic hazard assessment have shown that main contribution in seismic hazard is (for PGA_H) from earthquakes with magnitude $MW=5.7$ ($MS=5.4$) from the mean distance around 27 km (this distance includes the nearest zone and SSZ #3, 7 and 8), and for PGA_V is from earthquakes with magnitude $MW=5.1$ ($MS=4.5$) from the mean distance around 14 km (in the main SSZ #7 and 8), for rock.

The deterministic assessment of seismic hazard are estimated for fractile 0.5, for the largest magnitude in each SSZ at its closest distance to the object. The high seismic hazard (0.444 g PGA_H and 0.336 g PGA_V) on the object is possible from the #8 SSZ, where the object is located and south-west of the object, at a distance of about 2 km, there is Khrami South seismically active fault. #3, 7 and 10 SSZ, also can cause the significant seismic hazard (0.077-0.143 g PGA_H and 0.058-0.108 g PGA_V).

As per EUROCODE 8, obtaining of the specific response spectrum should be based on the paragraph 3.2.2.5 of EC8 EN 1998-1.2004, using q behavior coefficient, which in its turn, depends on the construction design of road buildings (bridge) and should be considered while working on the construction part of the project.

LOT 3								
46	0+166	4.00		496684	4583538	321.00	10	311.0
47	1+50	4.00		495810	4583387	323.00	10	313.0
48	2+63		25.00	494804	4583307	326.00	10	316.0
20	3+223		5.00	493879	4582685	324.00	15	309.0
21	3+359		14.00	493822	4582559	320.00	20	300.0
23	3+561		3.00	493777	4582362	308.00	25	283.0
49	4+367		1.50	493553	4581588	312.00	10	302.0
50	5+771	CL	CL	492763	4580451	320.00	10	310.0
51	6+980	CL	CL	491703	4579881	326.00	10	316.0
52	8+300	39.00		490490	4579355	331.00	10	321.0
53	9+730	180.00		489141	4578834	339.00	10	329.0
15	11+211		2.50	487800	4578364	343.00	20	323.0
LOT 4								
18	0+443		77,0	485 894	4 577 667	359,00	20,0	339,00
17	0+473		76,0	485 863	4 577 668	360,00	20,0	340,00
54	1+308		43,0	485 048	4 577 401	379,00	15,0	364,00
56	4+355	1,5		483 438	4 574 806	377,00	25,0	352,00
58	7+527		9,3	482 716	4 571 777	389,00	19,0	370,00
60	10+536		6,5	482 862	4 568 795	404,00	10,0	394,00
13	12+186		18,0	483 200	4 567 179	412,00	10,0	402,00
12	12+250		18,0	483 213	4 567 117	415,00	10,0	405,00
14	13+214		29,0	483 543	4 566 210	416,00	10,0	406,00
61	15+225	14,0		484 662	4 564 563	442,00	10,0	432,00

5.2.3.5.1 Engineering Geological Survey by CPTu Sounding

CPT sounding is a cost-effective, reliable and environmentally friendly in-situ method of determining the physical characteristics of subsurface soils. The sounding operations were carried out in December, 2018.

Static (CPT) soundings were performed in accordance with DIN Standard 4094-1:2001-6 conforming to EN ISO Standard 22476-1:2013.

During the CPT measurement, a cone on the end of a series of rods was pushed into the ground with constant intrusion velocity and continuous measurements were made of the resistance to penetration of the cone against the surface of the sleeve. A piezo-cone, was used at every exploration in this project, and this measured pore pressure. The total force acting on the cone divided by the projected area of the cone produced the cone resistance. The total force acting on the sleeve, divided by the surface area of the sleeve produced the sleeve friction.

Many factors influence CPT profiles, including physical cone properties, vertical effective stress, pore pressure, soil compressibility and fabric, and depositional characteristics.

The CPT used at the project site was mounted on a 24 ton weight truck and consisted of a 36 mm diameter rod with surface area of 15 cm² and a 60-degree-apex-angle cone at the base.

The cone is equipped with electronic load cells that measure both point resistance and frictional resistance between the soils and the cylinder side of the cone. The truck consists of the following elements:

- Thrust Machine: Apparatus providing thrust to the coiled push rod system so that the required constant rate of penetration is controlled;
- Reaction Equipment: Reaction for the thrust machine (24 ton weight CPT truck);
- Push Rod System: Thick-walled cylindrical tube used for advancing the penetrometer to the required test depth added in 1-meter increments until the physical limitations of the system are exceeded due to site conditions;
- Piezocone Penetrometer: Cylindrical terminal body mounted on the lower end of the push rods, including a cone, a sleeve, a filter, and internal sensing devices for the measurement of cone resistance, sleeve friction, pore pressure, and inclination; and
- Measuring System: Apparatus and software, including sensors, data transmission apparatus, recording apparatus, and data processing apparatus.

The major application of the CPT is soil profiling and classification. Typically, the cone resistance, (q_c) is high in sands and low in clays, and the friction ratio R_f is low in sands and high in clays. CPT classification charts cannot be expected to provide accurate predictions of soil type based on grain size distribution but provide a guide to the mechanical characteristics of the soil, or the soil behavior type (SBT). CPT data provides a repeatable index of the aggregate behavior of the in-situ soil in the immediate area of the probe. Hence, prediction of soil type based on CPT is referred to as soil behavior type (SBT).

Usually, correlations use the basic CPT parameters of cone resistance (q_c) and friction ratio (R_f). The friction ratio is expressed in percent and calculated by using the following equation:

$$R_f = f_s/q_c * 100$$

Where:

- R_f = Friction ratio
- f_s = Sleeve friction resistance
- q_c = Tip resistance

The collected data is presented in a graphical format as shown in Appendix4. The logs present soil parameters versus depth below ground surface in meters, and include:

- cone tip resistance plot in MN/m^2 ,
- friction sleeve resistance plot in MN/m^2 ,
- friction ratio plot in percent (%), and
- pore pressure in MPa (where applicable).

Measuring these parameters, the ratio of sleeve friction resistance and tip resistance can be calculated. This friction ratio ($f_s/q_c \times 100$) is also drawn. Empirically, the type of the soil can be determined:

- sand: $f_s/q_c \approx 1\%$,
- silt $f_s/q_c \approx 2,5\%$,
- clays $f_s/q_c > 4\%$

The Standard of Eurocode 7 was used for evaluating the CPT sound diagrams as well as the international literatures and experience².

The soil classification according to CPT results are presented in the figure below.

Figure 5.2.3.5.1.1. The soil classification according to CPT results

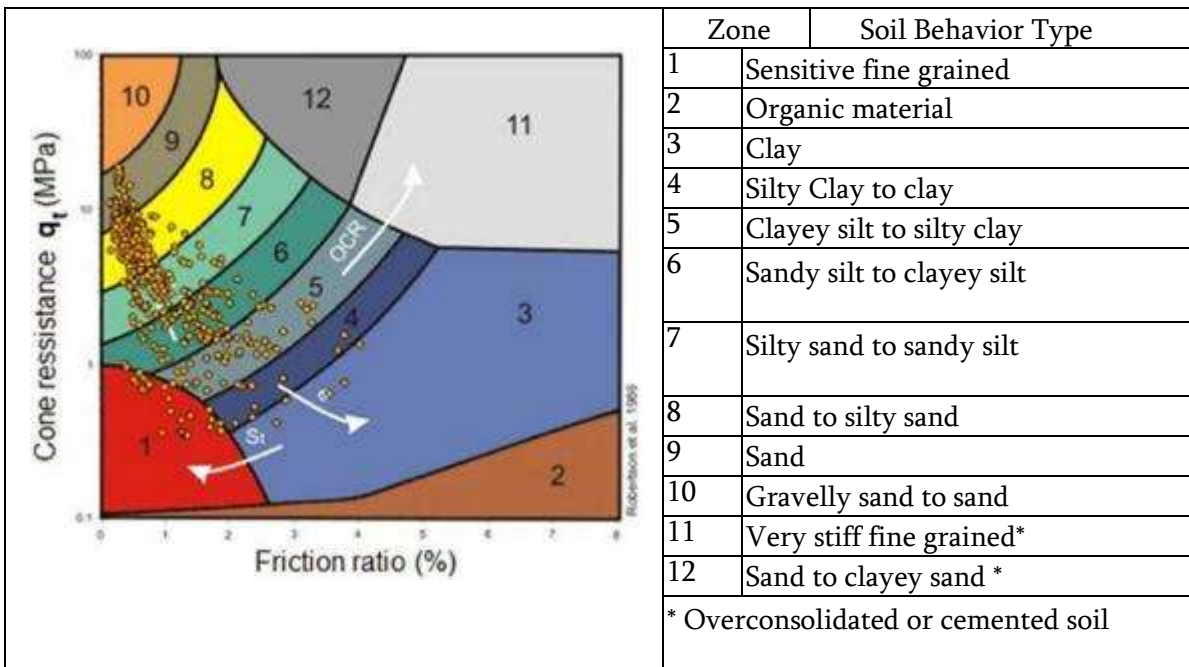


Table 5.2.3.5.1.1. CPTu tests data

CPTu No.	Ch.	From Center alignment, m		Coordinates m		Elev. m	Depth	Elev. bottom [m]
		Left side (LHS) [m]	Right Side (RHS) [m]	x [m]	y [m]	z [m]	[m]	
LOT 3								
CPT-36	2+900	CL	CL	494064	4582953	328.0	15.4	312.6
CPT-37	3+380	4.50		493835	4582536	319.0	8.6	310.4
CPT-39	3+450	CL	CL	493805	4582455	307.0	12.9	294.1
CPT-40	3+530	CL	CL	493789	4582395	308.0	11.6	296.4
CPT-60	5+770	5.50		492772	4580451	320.0	5.9	314.1
CPT-61	9+716	160.00		489154	4578858	339.0	3.9	335.1
CPT-41	11+390		80.00	487626	4578278	346.0	4.8	341.2
CPT-42	11+390	85.00		487751	4578174	344.0	4.4	339.6
LOT 4								
43	0+570	9.00		485761	4577590	361,0	20,16	340,8
44	0+550		14.00	485785	4577613	361,0	17,77	343,2
45	0+530	16.00		485800	4577581	360,0	20,06	339,9
46	0+510		11.00	485824	4577606	360,0	20,21	339,8
47	0+510	11.00		485826	4577584	360,0	20,31	339,7
48	0+480		13.50	485850	4577606	360,0	20,24	339,8

⁴With special regards to: Swedish Geotechnical Institute (1995)_ The CPT test (Information 15E); T. Lunne, P.K. Robertson, J.J.M. Powell: Cone Penetration Testing in Geotechnical practice (Blackie Academic); P.R. Robertson: Soil classification by the cone penetration test (Can. Geotechn. J. 27: 151-158)

49	0+480	CL	CL	485850	4577593	360,0	20,16	339,8
50	12+16 0	CL	CL	483213	4567207	418,0	0,57	417,4
51	12+19 0	CL	CL	483217	4567176	417,0	0,72	416,3
52	12+23 0	CL	CL	483228	4567138	420,0	2,03	418,0
53	13+20 5		26.00	483545	4566219	420,0	4,03	416,0
57	15+30	CL	CL	484504	4564681	448,0	15,94	432,1

CPT Values derived from CPT

Due to the relatively high sand content of the soil layers some informative soil parameters may obtain from the cone resistance (q_c) of the CPT tests according to the EN 1997-2:2008.

Table 5.2.3.5.1.2. Derivation of the effective friction angle (ϕ) and drained Young modulus of quartz & feldspar sands from the tip resistance (q_c) of pressure sounding (example)

Density index	q_c (M Pa)	Effective friction angle ^a ° (degree)	Drained Young modulus ^b E, (MPa)
Very loose	0.0 – 2.5	29 – 32	< 10
Loose	2.5 – 5.0	32 – 35	10 – 20
Medium dense	5.0 – 10.0	35 – 37	20 – 30
Dense	10.0 – 20.0	34 – 40	30 – 60
Very dense	> 20.0	40 – 42	60 – 90

^a - Values given are valid for sands. For silty soil a reduction of 3° should be made. For gravels 2° should be added.

^b - E, is an approximation to stress and time dependent secant modulus. Values are obtained for drained modulus corresponding to settlements for 10 years. They obtained assuming that the vertical stress distributions follow the 2:1 approximation.
Furthermore, some investigations indicate that these values can be 50% lower in silty soil and 50% higher in gravelly soil. In over-consolidated coarse soils, the modulus can be considerably higher. When calculating settlements for ground pressures greater than 2/3 of the design bearing pressure in ultimate limit state, the modulus should be set to half of the values given in this table.

5.2.3.5.2 Results of the Laboratory Tests

The boreholes were conducted at the bridge locations, heavy cutting or embankment location. Both the cohesive and non-cohesive soil samples were taken. In order to identify particle size distribution of existing soil, particle size distribution via sieve test were conducted. Based on visual observation of site, test-pits, results of laboratory testing and processing of materials, the consultant obtained following information:

- * Physical-mechanical properties of clay soils
- * Chemical composition of soils;
- * Water chemical composition;
- * Particle size distribution of soils
- * Atterberg Limits
- * Uniaxial & Triaxial tests and shear tests
- * Consolidation tests
- * UCS tests on rock samples

* PLI (Franklin) test on rock samples

Under the data of field geotechnical and laboratory tests conducted along the project road profile, the following layers were identified based on Engineering Geological Elements (EGE). From the Borehole log sheet the following EGE were established.

EGE- 1, Sand and silt containing sand of medium and high plasticity. It is extended along the road.

EGE- 2, sandy gravel with low plasticity. It is extended along the road.

EGE- 3, Pebble (50 ~ 55%) and crushed stone (20 ~ 25%) with sand. It is extended along the road.

It was identified only in borehole 15.

Due to the detailed laboratory tests, the large quantity of test results made it possible to carry out statistical analyses of the soil properties determining characteristic parameters for design.

The parameters of the layers are summarized in the table below:

A			Sandy clay			
			min	max.	Avg	Char.v.
Sand content	Sa	[%]	0,8	39,3	16,6	10,9
Silt content	Si	[%]	8,3	66,5	37,3	29,2
Clay content	Cl	[%]	25,8	68,0	46,3	39,8
Natural moisture content	w	%	11,2	27,4	19,3	17,4
Porosity coefficient			0,5	0,9	0,7	0,7
Degree of <i>Saturation</i>		[%]	58,0	83,7	70,7	66,7
Liquid limit	wL	[%]	32,8	59,0	51,4	47,6
Plasticity limit*	wP	[%]	18,3	30,4	26,7	25,1
Plasticity index	PI	[%]	14,5	29,4	24,7	22,0
Consistency index	CI	[%]	0,9	1,9	1,3	1,2
Inner friction angel	□	°				14-18
Cohesion*	c	kPa				30-60
Bulk density*	□	g/cm ³	1,69	1,99	1,84	1,80
Compression module	E	MPa				14-16

* Due to the high plasticity index expansive clay should be assumed. In the light of the other test results high quantity of clay minerals could be found in the soil.

** Due to the boring technology the values should be corrected. In the boring process the shale and hard marl have been grinded.

			Sandy gravel			
			min	max.	Avg	Char.v.
Gravel content	Gr	[%]	47,6	63,3	54,7	51,9
Sand content	Sa	[%]	9,4	22,3	15,5	13,2
Silt content	Si	[%]	8,4	27,8	22,2	18,9
Clay content	Cl	[%]	4,5	23,4	7,7	4,9
Natural moisture content	w	[%]	5,0	12,3	9,1	8,1
Liquid limit	wL	[%]	25,1	38,9	31,9	29,5
Plastic limit	wP	[%]	14,6	22,9	18,6	17,3
Plasticity index	PI	[%]	6,8	18,5	13,3	11,2

Consistency index	CI	[%]	1,3	3,1	1,8	1,5
Inner friction angel	ϕ	°				40
Cohesion	c	kg/cm ²				0
Bulk desnity	ρ	g/cm ³	1,98	2,01	2,00	1,95
Module of deformation	E	MPa				40,03

- * Due to the high plasticity index expansive clay should be assumed. In the light of the other test results high quantity of clay minerals could be found in the soil.
- ** Due to the boring technology the values should be corrected. In the boring process the shale and hard marl have been grinded.

5.2.3.5.3 Empirical soil parameters

Strength and compression tests were performed on undisturbed core samples of the cohesive soils. For the determination of internal friction angle, cohesion and bulk modulus can be used the following relationships based on the results of other laboratory tests (Atterberg limits).

- **Internal friction angle and cohesion in case of cohesive soils**

The shear parameters of the cohesive soil were calculated from the index of plasticity (PI) and from the relative consistency (CI). The following empirical equation can be used for the calculation of the internal friction angle:

$$\phi = (30 - 0,4 * PI) [^\circ]$$

- **Compression modulus in case of cohesive soils**

The modulus of compressibility of the clays can be calculated from the PI and the CI values, using the empirical equation of Kopácsy: $E_s = CI * (16 - 0,2 * PI)$ [MPa]

Table 5.2.3.5.3.1. Approximate friction angle of cohesive soils

	PI	e	ϕ		
			CI \approx 1,2	CI \approx 1,0	CI \approx 0
silty sand, sandy silt	1-10	0.5	28°	28°	24°
		0.7	26°	26°	20°
Silt, sandy clay	10-15	0.5	26°	26°	20°
		0.7	24°	24°	18°
Clay	15-20	0.6	22°	20°	15°
		0.8	20°	18°	12°
	20-	0.7	18°	16°	10°
		0.9	15°	12°	8°

5.2.3.5.4 Conclusions and recommendations

The explored soil structure is matched to the formerly described geological conditions. There is no significant geotechnical objection to the building or construction of the road. No hazardous geodynamic processes (landslides, rock fall, etc.) needing significant reinforcement works were identified in the project corridor or adjacent to it.

Alluvial and Proluvial deposits were identified in the boreholes. The bearing capacity of the Quaternary sedimentary deposits layers is suitable to provide embankment and engineering

structures. A method of little depth foundations (e.g. box culverts, underpasses, etc.) can be used for the engineering structures. However, most of the levels of foundations of the structures are found below the embankment.

Generally, outcrops of the ground water levels are not expected up to 2 m from the existing surface. However, the situation near rivers Algeti and Polit-Arkhi is special and (ground) water level may exceed the level of the surface of the relief.

No organic grounds are fixed along the given section. Topsoil is necessary to remove from the borders of the construction area. The disposed topsoil must be stored in piles for further use by the contractor as per the developed ground treatment plan.

The fill of the embankment should be properly compacted. The maximum thickness of a layer of the fill must not exceed 30 cm. The compaction should be carried out by single layer. The requested rate of the density is $T_{\gamma}=90\%$. The density of each layer should be checked according to the approved qualification and sampling plan submitted by Contractor.

It should be noted that effectively, for the cohesive soils, compaction is highly depend on the moisture content of the soil. The best results can be achieved if the moisture content is close to the optimum. Due to the majority of the earthworks being in embankment construction, with the occurrence of only a short section of cutting, acquisition of some material from soil borrow pits will be necessary.

If the earthworks are performed under unfavorable weather conditions, the local installation of different kind of geosynthetics may be necessary in some areas where the ability is important to separate, filter, reinforce, protect, or drain soil layers.

Generally there are two important aspects of implementing geosynthetics in this project:

- a.) separate two different layers e.g. subsoil and embankment fill
- b.) strengthening the earthworks to be constructed

The required bearing capacity values of the subsoil, of the improved layer and of the subgrade shall be included in the implementation plan. The purpose of the geosynthetics implementation is to resist the shear stresses from the embankment (lateral sliding of embankment) and possibly also shear stresses from the subsoil (extrusion/squeezing).

If an embankment is built on weak subgrade, pore waters in the subgrade are forced to leave by the load, consolidation takes place and the bearing capacity of the subgrade increases. In case of quick construction of the embankment, this pore water pressure is suddenly greatly increased and causes a hydraulic soil break under the embankment and the constructed embankment slips apart.

Embankment foundation is necessary to prevent this type of failure to occur on weak subgrades. To prevent the slipping apart of the embankment body some kind of reinforcement needs to be installed at the bottom of the embankment that will hold it together along the embankment toe.

A structure designed using subgrade parameters, the weight of embankment and its working together with the geogrids and the tensile strength of the geogrid. By default biaxial or triaxial geogrids are used, but for higher loads it may become necessary to use uniaxial geogrids placed perpendicular to the axis of the embankment. Geogrids may be placed at a spacing of max. 40 cm, because in layers exceeding this thickness the arching of aggregate filling material occurs. The solution is acceptable if consolidation in the various phases is not excessive, because the elasticity of the embankment foundation with multilayer reinforcement fully copies the settlements pertaining to the embankment height. This embankment foundation does not reduce settlement.

Road subbase is very sensitive to impacts during construction. Precipitation, drenching and construction traffic, and their combined effects, can cause severe damage. As we know, the subbase is subjected to the greatest load during construction and these loads are not distributed but linear loads, as the construction equipment move on the surface. Therefore the subbase must be designed to consider these impacts and must be reinforced to ensure the underlying subgrade does not suffer any rutting, for slack waters in the rut may cause the quick failure of the substructure of the whole road structure.

- Most suited for subbase reinforcing are biaxial or triaxial geogrids with integral junctions. Obviously the type of fill on the grid is important too. These types of geogrids do not function properly with well graded 0/60 crushed stone. It is important that the so called interlocking effect between the grid and the fill particles is created, i.e. the particles protrude into the openings of the grid and are locked in place (They shall be grappled on site).
- Based on the bearing capacity of the subgrade, using design charts, the thickness of subbase course can be determined that will provide the required load bearing capacity on the top of the subgrade.
- In the construction of roads and railroads an important objective is to ensure access to the construction site in all weather conditions. This objective is also met by subbase reinforcement.
- Embankment foundations act on relatively better quality subgrades as subbase reinforcement, because the objective is to increase the bearing capacity of the structure from poor to the generally required value of 40 MPa.
- Subbase reinforcement cannot be discussed without the drainage of the soil structure. New geosynthetic products are gaining ground that can replace drainage blankets and can be connected into vertical drains made of the same or similar materials. With their joint use the drainage of earthworks in cuts or embankments can be properly solved. They ensure both during construction and service that the earthwork will not get drenched through, ensuring that the bearing capacity realized at the construction will be kept up in the long run.
- Subbase reinforcement has a special case when railway ballast is reinforced. Tensar developed a grid type for use in railway ballast reinforcement that doubles the service life of the structure. It is a good idea to use it for new structures because with low extra cost longer service life can be achieved.

Other important are where the geosynthetics are widely use the slope protection either in cut or embankment. All slope surfaces must be protected against erosion by rainwater. Slope protection basically means sodding, the roots of the grass prevent the washout of soil particles. Artificial protection protects the slope until the roots of the grass are developed. Materials most frequently used are natural, biologically degradable textiles. The geocell described earlier is also capable of erosion control on slope surfaces.

- The type of protection is normally determined by the angle of the slope, but the soil and geometrical location of the slope and rain intensity must also be considered.
- For slight slopes jute or coconut shuck protection is sufficient onto which grass seed is sown or grass will grow through it. For steeper slopes some form of spatial geogrid is required that can be filled with humus or even rubble. For even steeper slopes geocell protection is recommended that can be filled with soil, but they are typically filled with stone.

5.2.4 Soil

The soil cover in the project implementation zone is presented by quite diversified types of soil. In the intense land cultivation area, where the longest section of the design corridor must run, there are Cinnamonic grey-brown soils spread. The given soils are fertile and are widely used to grow cereal crops and vegetables.

Along the sections of the highway running near the surface waters, alluvial soils also present.

The main problem with soils is weathering and pollution with different substances.

The reason for this is improper use of inorganic fertilizers, destruction of field protection and wind break belts and faulty operation of irrigation systems on the one hand and wind and water erosion on the other hand.

5.2.5 Hydrology

Algeti-Sadakhlo project highway corridor runs across Kvemo Kartli Plain, in the extreme southern area. The corridor is crossed by three rivers and 50 nameless gullies. Of rivers, Khrami River crossing village Didi Muganlo 2 km in the west is noteworthy. Debeda river gets near the project corridor at its last section, but does not cross it.

The River Khrami (Ktsia-Khrami) heads on the southern slopes of Trialeti Ridge, in Javakheti mountains, 2,4 km east of mountain Karakaia (2850,8 m), at the altitude of 2422 m above sea level and flows into the Mtkvari River from its right side, near village Shakhli. The total length of the river is 201 km, its total fall is 2167 m, its average gradient is 10,7‰; the area of the river water catch basin is 8340 km². The river is flown by 2234 tributaries with the total length of 6471 km.

The River basin covers the areas in south-east of Georgia and north-western part of Armenia. The relief of the River basin is mountainous and intensely dissected with the gorges of the river tributaries.

In 1947, near settlement Tsalka, in 117 km from the river mouth, a 33,2-meter-high and 113-meter-long Khrami (Tsalka) water reservoir of the power generation and complex purposes formed with a stone-fill dam was put to operation. The total volume of the water reservoir is 313 mln. m³ and its useful capacity is 293 mln. m³. The area of the water catch basin of the Ktsia-Khrami River in the section of Tsalka water reservoir is 1045 km². Khrami (Tsalka) water reservoir totally regulated the Ktsia-Khrami River runoff in its lower course.

The river is alimented with snow, rain and ground waters. Besides, the role of ground waters in the river alimentation increases only past Tsalka water reservoir, at the expense of Dambashi springs outcropping from the volcanic slopes.

The River is alimented with snow, rain and ground waters. However, the role of the ground waters in the river alimentation is significant only past Tsalka water reservoir, at the expense of Dashbashi springs flowing out of the volcanic slopes of the gorge. In natural conditions, the water regime of the river depends on the alimentation sources and is characterized by one spring flood and low-water periods in other seasons of the

year, which in some years may be disturbed by the freshets caused by summer or autumn rains. In natural conditions, 38% of the annual runoff flows in spring, 26% flows in summer, 24% flows in autumn and 12% flows in winter. Past Tsalka water reservoir, the internal-annual distribution of the River runoff totally depends on the amount of water discharged from the water reservoir for power generation purposes. In terms of total filling of Tsalka water reservoir, the water is expected to be discharged from the dam flood-control outlet with its value equaling 500 m³/sec under the project.

Past Tsalka water reservoir, the River is widely used for power generation and irrigation purposes. The water reservoir supplies regulated water of the River Ktsia-Khrami to Of 113 and 110 MW capacity Khramhesi-I (Khrami HPP I) and Khramhesi-II (Khrami HPP II), as well as Tetrtskaro, Bolnisi and Marneuli agricultural plots of field.

River Suli-Kobu heads at the altitude of 350 m on Kartli Plain and flows across a depression, which is a natural water intake for the water drained from the irrigation channels and irrigated areas. Due to this fact, the river bed is bogged. The area of the water catch basin of the river up to the crossing point with the modernization road is 4,37 km², the river length is 5,50 km and the bed gradient is 6,7‰. Despite the fact that the bogged bed of Suli-Kobu river always has water in it, passages of peak discharges across it is not excluded during the intense rains.

River Banosha heads on the territory of Armenia, at 1950 m altitude on the northern branch of Loki Ridge and flows into Debeda river from its left side on the territory of Georgia. The length of the river up to the crossing point with the modernization road is 19,8 km, its total fall is 1540 m, its average gradient is 77,8‰, the area of the catch basin is 93,3 km². The basin of the river with its mountainous relief is located on the eastern slope of Loki Ridge.

The geology of the river basin is presented by the Quaternary deposits, which are covered with loamy soils. Forest cover in the river bed grows only on the territory of Armenia. The river bed is moderately winding and is not branched.

The river is alimented with snow, rain and ground waters. Its water regime is characterized by spring and summer floods and instable low-water periods in other seasons of the year.

On the territory of Georgia, the river is not used for economic purposes.

Dry nameless gullies, which head on the eastern slopes of the northern branch of Loki Ridge, are the left tributaries of Debeda River. The areas of the water catch basin of the mentioned gullies up to the crossing point with the modernization road vary from 0,05 km² to 7,42 km², their length varies from 0,23 km to 5,90 km and the gradient of their beds varies from 36,2‰ to 157,7‰.

The geology of the dry nameless gullies is presented by the Quaternary deposits, which are covered with loamy soils. A great majority of the gullies has no forest cover. Of the vegetation cover, only sparse bushes and grasses grow there. Insignificant forest plantations grow in the upper zone of the basins of the gullies, which head on the territory of Armenia.

For most of the year, the gullies are dry. Water in the beds of the gullies appears only during the intense rains or when little snow melts. Besides, runoffs and levels of the freshets caused by rains much exceed those caused by snow melting. Runoffs caused by freshets flow into Debeda River.

Debeda River, which does not cross the modernization road, but is a water intake of the dry gullies, heads from the spring at the altitude of 1850 m on the northern slope of Janduri Ridge, on the territory of Armenia and flows into Khrami River from its left side on the territory of Georgia at the altitude of 295 m.

The total length of the river is 176 km, its total fall is 1455 m, its average gradient is 8,27‰; the area of the river water catch basin is 4080 km². A lower section of the river with the length of 25 km flows across the territory of Georgia. Along this section, the area of the water catch basin of the river is 290 km². The river has its major tributaries on the territory of Armenia and has one left-side tributary, Banosha River with the length of 20 km on the territory of Georgia.

The river basin is clearly divided into the mountainous and lowland zones. The mountainous zone is located on the territory of Armenia and the lowland zone is located on the territory of Georgia. On the territory of Georgia, where the river branches and is intensely meandering, a great part of the river basin is used as agricultural plots of field.

The River is alimeted with snow, rain and ground waters. Its water regime is characterized by spring and summer floods and stable low-water period in other seasons of the year. The low water discharges in the river occur in winter months.

On the territory of Georgia, Debeda River is widely used for irrigation purposes. There are 7 irrigation channels across it with their distributing units totally covering the area and floodplains adjoining the River.

In addition to the rivers and gullies described above, Algeti-Sadakhlo modernization road is crossed by a main irrigation channels and their distributing units. It should be noted that Kcemo Kartli Plain, following its climatic conditions, needs intense irrigation. As a result, quite a dense network of irrigation channels is provided both, in this concrete area and all over Kvemo Kartli plain. The conductivity of the irrigation channels is calculated when developing relevant designs and the passages of water peak discharges across them what would pose problems to the trouble-free operation of the modernization road, is virtually excluded.

5.2.5.1 Water peak discharges

Of the rivers and gullies crossing Algeti-Sadakhlo modernization road, only Khrami river is studied hydrologically.

The runoff of the **Khrami River** past Khrami (Tsalka) water reservoir was studied at different times and with different durations, near village Dashbashi, at Khramhesi building (diversion channel), Khramhesi settlement (conductive channel), near village Trialeti, village Kakliani, portal of conductive tunnel, village Tsknari, village Dagetkhachini, village Imiri and near Red Bridge. The observations at the said hydrological stations stopped in the 1990s.

Water peak discharges in the level of the crossing point with Algeti-Sadakhlo modernization road are identified by using an analog method. The data of River Khrami – H/S Imiri located 2,9 km above the modernization road, against the current, are used as an analog. The observations over the peak discharges in the section of hydrological station Imiri were carried out for 49 years (1942-3^{sec}3, 1985-91), but the data are officially published only through 1986.

In 1947, as it was mentioned above, Khrami (Tsalka) water reservoir was put to operation, which regulated the River runoff in its lower course. Therefore, it was decided to fix the peak discharges of the River Khrami in H/S Imiri section from the moment of putting the water reservoir through 1986.

The 44-year-long variation series (1942-83, 1985-86) of the observation data over the officially published water peak discharges of the River Khrami in Hydrological Station Imiri section was statistically treated in line with the effective normative documents of Georgia by using the moments method. As a result, the following

parameters of the distribution curve were obtained: Many-year value of water peak discharges: $Q_0 = \frac{\sum Q_i}{n} = 165$ m³/sec;

$$\text{Variation coefficient } C_v = \sqrt{\frac{\sum(K-1)^2}{n-1}} = 0,75;$$

The value of the asymmetry coefficient $C_s = 4 \cdot C_v = 3,00$ was obtained by the nearest conjunction of the theoretical and empirical points on the probability cell.

The value of the asymmetry coefficient was determined as a function of sloping coefficient S. Its value was calculated as follows:

$$S = \frac{Q_{5\%} + Q_{95\%} - 2 \cdot Q_{50\%}}{Q_{5\%} - Q_{95\%}}$$

As for the average many-year value of water peak discharges, it was calculated by formula:

$$Q_0^I = Q_{50\%} - \Phi_{50\%} \cdot \delta$$

Mean square deviation is calculated as follows:

$$\delta = C_v \cdot Q_0^I = \frac{Q_{5\%} - Q_{95\%}}{\Phi_{5\%} - \Phi_{95\%}}$$

where $Q_{5\%}$, $Q_{50\%}$ and $Q_{95\%}$ are the values of water peak discharges of 5, 50 and 95% provisions established by means of the empirical curve of provision;

$\Phi_{5\%}$, $\Phi_{50\%}$ and $\Phi_{95\%}$ are rated ordinates of a binomial curve of 5, 50 and 95% provision.

The calculations with the graphical-analytical method yielded the following parameters of the distribution curve:

Average many-year value of peak discharges $Q_0^I = 170$ m³/sec.

Variation coefficient is $C_v = 0,82$;

Asymmetry coefficient $C_s = 1,90$;

Mean square deviation $\delta = 139$.

The parameters gained by the graphical-analytical method and rated ordinates of the binomial distribution curve were used to fix the peak discharge values of different provisions of the river Khrami in the section of hydrological station Amiri. As the theoretical points obtained by using the graphical-analytical method coincide best with the empirical points plotted on the probability cell, the design value of the water peak discharge of the Khrami River in the section H/S Imiri is accepted to be the peak discharges obtained with the graphical-analytical method.

Transition from the analog section, i.e. Imiri section, to the level of the modernization road is done by using a transition coefficient with its value gained through the involutio to the degree of reduction of the ratio between the areas of the catch basins by using the following expression:

$$K = \left(\frac{F_{sapr.}}{F_{an.}} \right)^N$$

Where $F_{sapr.}$ is the area of the catch basin of river Khrami in the level of the modernization road, and 4175 km²;

$F_{an.}$ - is the area of the catch basin of river Khrami in the analog section, i.e. in the section of the hydrological station Imiri and equals to 3840 km²;

N – is the indicator of degree of reduction with its value for water peak discharges taken as 0,5.

Consequently, the coefficient for transition from the analog section to the design section will equal to 1,038. By multiplying the values of water peak discharges obtained in the section of H/S Imiri by the given coefficient, we gain the values of water peak discharges in the level of the modernization road.

It should also be noted that for 70 years of operation of Khrami water reservoir, no water was ever released from the dam flood-control outlet and as a result, the amount of water to release from the dam flood-control outlet in the design section was not considered when calculating the water peak discharges.

Water peak discharges of Khrami River in the design (H/S Imiri) section and in the level of the modernization road identified by using an analog method are given in Table 5.2.4.1.1.

Table 5.2.5.1.1. Peak discharges of Khrami River, m³/sec

Section	Method	F km ²	Q ₀ m ³ /sec	C _V	C _S	L	K	Provision, P%				
								0.5	1	2	5	10
Analog	Graphical-analytical	3840	170	0.82	1.90	139	–	760	665	575	450	350
Highway	–	4175	176	–	–	–	1.038	790	690	600	470	365

As the table shows, the values of water peak discharge identified in the level of the modernization road are less the values given in the hydrological literature (The resources of the surface waters of the USSR, v. 9, Trans-Caucasia and Daghestan, issue 1, West Trans-Caucasia. Hydrographic description of rivers, lakes and water reservoirs. Edited by G.N. Khmaladze and V.Sh. Tsomaia, Leningrad, publishing house Hydrometeoizdat. 1972) what can be explained by the passages of the real water peak discharges during the period between the observations and resultant non-registration.

Therefore, water peak discharge values of Khrami River in the level of the modernization road are identified by using the same regional-empirical formula deduced for the middle and lower zones of Khrami River and possible to use when the water catch basin of a river does not exceed 300 km².

The given regional-empirical formula, which is given in “The Technical reference of the water peak discharges of the rivers in the Caucasus” is as follows:

$$Q_{5\%} = \left[\frac{8,15}{(F + 1)^{0,50}} \right] \cdot F \text{ m}^3/\text{sec}$$

Where:

Q_{5%} is the value of the water peak discharge with a 5% provision (m³/sec);

F is the area of the water catch basin in the design section and equals to 4175 km².

Transition from a 5% provision to different provisions is done by using special transition coefficients given in the same reference book.

The discharge values of Khrami River obtained through the empirical regional formula are given in Table #2 below.

Other small rivers and dry nameless gullies crossing Algeti-Sadakhlo modernization road are not studied hydrologically. Therefore, the values of their water peak discharges are calculated by using the method given in “The Technical reference of the water peak discharges of the rivers in the Caucasus”.

It should be noted that this method yields the water peak discharge values 12-15% higher than the boundary intensity formula given in SNiP 2.01.14-83 (Determination of Design Hydrological Properties), which was deduced for the rivers of the former USSR in the 1960s. The boundary intensity formula does not consider the global climate changes of the recent decades and the resultant increase in the precipitation intensity. This is why it gives lower values of the water peak discharge. By considering the increased intensity of precipitations on the background of global climate changes and increased values of water peak discharge as a result, it was decided to calculate the design values of water peak discharges by using the method referred to in the Technical Reference. This method is well approved in Georgia and as the practical experience suggests, it meets the modern conditions resulting from the climate change.

As per this method, the water peak discharges of the rivers and gorges with the areas of their water catch basins not exceeding 300 km², are calculated by the following formula:

$$Q = R \cdot \left[\frac{L^{2/3} \cdot K^{1,35} \cdot \tau^{0,38} \cdot \bar{i}^{0,125}}{(L + 10)^{0,44}} \right] \cdot \Pi \cdot \lambda \cdot \delta \text{ m}^3/\text{s}$$

Where

R - is a regional parameter. Its value for West Georgia is taken as 1,15.

F - is the area of the water catch basin in the design section, km².

K - is the climate coefficient of the region, whose value is taken from a specially designed map.

τ - is the reoccurrence in years.

i - is the balanced gradient of the river or gorge in units from the mouth to the design section.

L - is the length of the river or gorge from the mouth to the design section, km.

Π - is the coefficient characterizing the soil cover in the river basin. Its value is taken from a special map and relevant table.

λ - is the basin forestation coefficient, whose value is calculated with the following expression:

$$\lambda = \frac{1}{1 + 0,2 \cdot \frac{F_t}{F}}$$

where *F_t* is the area of the basin covered with forest, %.

δ is the basin form coefficient, with its value gained from the expression:

$$\delta = 0,25 \cdot \frac{B_{\max}}{B_{\text{Ave}}} + 0,75$$

Where *B_{max}* is the maximum basin width (km).

B_{Ave} is the average basin width (km), and its value is taken from expression: $B_{\text{Ave}} = \frac{F}{L}$.

When calculating the water peak discharges of small gorges with the area of their catch basins less than 5 sq.km, the formula above additionally includes specially designed coefficients relevant to the areas of the catch basin referred below.

<i>F</i> km ²	<1	1	2	3	4	5
<i>K</i> ¹	0.70	0.80	0.83	0.87	0.93	1.00

The values of the morphometric elements to calculate the water peak discharges of the gorges crossing the modernization road fixed via topographic map scaled 1:25000 and values of water peak discharges (for 200-, 100-, 50-, 20- and 10-year reoccurrences) calculated by the formula above, are referred to in Table 5.2.4.1.2. below.

Table 5.2.5.1.2. Water peak discharges of the rivers and gorges crossing the project corridor

საპროექტო დერეფნის

Name and number of the river/ gorge	<i>F</i> km ²	<i>L</i> km	<i>i</i> Bed	<i>λ</i>	<i>δ</i>	<i>K</i>	<i>Π</i>	<i>K</i> ¹	Peak discharges m ³ /sec				
									<i>τ</i> = 200 years	=100 years	=50 years	=20 years	=10 years
River Solu-Kobu #1	4.37	5.50	0.0067	1.00	1.00	4.50	1.00	0.94	23.5	19.6	15.1	10.6	8.18
River Khrami#2	4135	—	—	—	—	—	—	—	920	800	670	525	425
მშრალობევი#3 D-gorge	0.46	1.75	0.0657	1.00	1.15	4.50	1.00	0.70	6.71	5.59	4.30	3.03	2.33
D-gorge#4	0.07	0.23	0.1522	1.00	1.00	4.50	1.00	0.70	1.82	1.62	1.25	0.88	0.68
D-gorge#5	2.17	2.70	0.0759	1.00	1.16	4.50	1.00	0.84	22.6	18.8	14.5	10.2	7.85
D-gorge#6	0.92	2.70	0.0841	1.00	1.07	4.50	1.00	0.70	9.91	8.26	6.35	4.48	3.45

D-gorge#7	0.17	0.90	0.0633	1.00	1.05	4.50	1.00	0.70	3.24	2.70	2.08	1.47	1.13
D-gorge#8	0.49	1.28	0.0422	1.00	1.07	4.50	1.00	0.70	6.28	5.23	4.02	2.84	2.18
D-gorge#9	2.56	3.45	0.0739	1.00	1.15	4.50	1.00	0.85	24.6	20.5	15.8	11.1	8.56
D-gorge#10	1.06	1.80	0.0406	1.00	1.07	4.50	1.00	0.81	11.9	9.90	7.61	5.37	4.13
D-gorge#11	2.12	3.90	0.0905	1.00	1.17	4.50	1.00	0.84	22.1	18.4	14.2	9.98	7.68
D-gorge#12	1.03	3.08	0.1166	1.00	1.12	4.50	1.00	0.80	13.1	10.9	8.38	5.91	4.55
D-gorge#13	0.49	2.25	0.0578	1.00	1.11	4.50	1.00	0.70	6.53	5.44	4.18	2.95	2.27
D-gorge#14	1.15	3.25	0.0828	1.00	1.14	4.50	1.00	0.81	13.9	11.6	8.92	6.29	4.84
D-gorge#15	1.14	3.23	0.1142	1.00	1.14	4.50	1.00	0.81	14.4	12.0	9.22	6.51	5.01
D-gorge#16	0.14	0.90	0.0389	1.00	1.11	4.50	1.00	0.70	2.83	2.36	1.81	1.28	0.99
D-gorge#17	0.64	1.95	0.0487	1.00	1.13	4.50	1.00	0.70	7.87	6.56	5.04	3.56	2.74
D-gorge#18	2.20	3.40	0.0932	1.00	1.18	4.50	1.00	0.84	23.3	19.4	14.9	10.5	8.10
D-gorge#19	0.45	1.30	0.0362	1.00	1.08	4.50	1.00	0.70	5.87	4.89	3.76	2.65	2.04
D-gorge#20	4.16	3.95	0.1101	0.99	1.13	4.50	1.00	0.94	37.9	31.6	24.3	17.2	13.2
D-gorge#21	3.22	5.50	0.0847	0.98	1.18	4.50	1.00	0.88	28.6	23.8	18.3	12.9	9.93
D-gorge#22	3.82	4.30	0.0900	1.00	1.14	4.50	1.00	0.90	33.7	28.1	21.6	15.2	11.7
D-gorge#23	0.53	1.20	0.0475	1.00	1.09	4.50	1.00	0.70	6.86	5.72	4.40	3.10	2.40
D-gorge#24	4.32	5.90	0.0974	0.98	1.18	4.50	1.00	0.94	37.3	31.1	23.9	16.9	13.0
D-gorge#25	2.99	5.30	0.0904	0.99	1.17	4.50	1.00	0.87	26.4	22.0	16.9	11.9	9.18
D-gorge#26	4.66	5.78	0.1019	0.96	1.19	4.50	1.00	0.95	39.6	33.0	25.4	17.9	13.8
D-gorge#27	0.75	1.80	0.0667	1.00	1.10	4.50	1.00	0.70	8.92	7.43	5.71	4.03	3.10
D-gorge#28	1.09	2.05	0.0941	1.00	1.06	4.50	1.00	0.80	13.1	10.9	8.38	5.92	4.55
D-gorge#29	0.12	0.65	0.0608	1.00	1.15	4.50	1.00	0.70	2.83	2.36	1.81	1.28	0.99
D-gorge#30	2.40	3.90	0.1095	0.99	1.10	4.50	1.00	0.85	23.2	19.3	14.8	10.5	8.06
D-gorge#31	1.52	4.08	0.0931	1.00	1.08	4.50	1.00	0.82	15.8	13.2	10.2	7.16	5.51
River Banocha #32	93.3	19.8	0.0778	0.90	1.11	5.00	1.00	–	229	191	147	104	79.7
D-gorge#33	4.11	4.75	0.0768	1.00	1.12	4.50	1.00	0.94	35.2	29.3	22.5	15.9	12.2
D-gorge#34	1.84	2.75	0.1374	1.00	1.10	4.50	1.00	0.82	20.2	16.8	12.9	9.12	7.01
D-gorge#35	1.05	2.60	0.1296	1.00	1.13	4.50	1.00	0.80	13.8	11.5	8.84	6.24	4.80
D-gorge#36	0.47	1.20	0.0592	1.00	1.03	4.50	1.00	0.70	6.16	5.13	3.94	2.78	2.14
D-gorge#37	0.05	0.35	0.0743	1.00	1.01	4.50	1.00	0.70	1.43	1.19	0.92	0.65	0.50
D-gorge#38	7.42	4.80	0.0896	0.86	1.00	4.50	1.00	–	43.4	36.2	27.8	19.6	15.1
D-gorge#39	0.13	0.55	0.0909	1.00	1.00	4.50	1.00	0.70	2.74	2.28	1.75	1.24	0.95
D-gorge#40	3.60	3.20	0.1265	0.89	1.00	4.50	1.00	0.90	27.4	22.8	17.5	12.4	9.52
D-gorge#41	0.26	1.28	0.0703	1.00	1.05	4.50	1.00	0.70	4.30	3.58	2.75	1.94	1.49
D-gorge#42	0.09	0.25	0.0600	1.00	1.00	4.50	1.00	0.70	2.05	1.71	1.31	0.93	0.71
D-gorge#43	2.86	2.72	0.1305	0.89	1.00	4.50	1.00	0.85	22.6	18.8	14.5	10.2	7.85
D-gorge#44	1.56	2.58	0.1318	0.98	1.12	4.50	1.00	0.81	17.8	14.8	11.4	8.03	6.18
D-gorge#45	0.36	0.85	0.1059	1.00	1.08	4.50	1.00	0.70	5.88	4.90	3.77	2.66	2.05
D-gorge#46	0.60	1.45	0.1517	1.00	1.08	4.50	1.00	0.70	8.46	7.05	5.42	3.83	2.94
D-gorge#47	0.58	1.45	0.1393	1.00	1.09	4.50	1.00	0.70	8.26	6.88	5.29	3.73	2.87
D-gorge#48	0.22	0.62	0.1129	1.00	1.03	4.50	1.00	0.70	4.09	3.41	2.62	1.85	1.42
D-gorge#49	0.98	1.60	0.1468	1.00	1.10	4.50	1.00	0.70	11.8	9.87	7.59	5.36	4.12
D-gorge#50	0.49	1.27	0.1575	1.00	1.11	4.50	1.00	0.70	7.68	6.40	4.92	3.47	2.67
D-gorge#51	0.27	1.00	0.1050	1.00	1.09	4.50	1.00	0.70	4.86	4.05	3.11	2.20	1.69
D-gorge#52	1.88	1.20	0.1333	0.99	1.00	4.50	1.00	0.82	19.4	16.2	12.5	8.79	6.76
D-gorge#53	0.40	1.20	0.0933	1.00	1.08	4.50	1.00	0.70	6.12	5.10	3.92	2.77	2.13

The design water conductivity of the water objects envisaged within the limits of Algeti-Sadakhlo Highway is in line with the data given in the table above.

5.3 Biological environment

The biological study accomplished in the project corridor of Algeti-Sadakhlo Highway incorporated three components:

1. Study of floristic environment;
2. Study of fauna and assessment of their habitats;

No territories protected by the national legislation and/or international conventions are identified near the project corridor. Of near locations, only Emerald candidate site “Gardabani” is noteworthy. It is located more than 5,5 km east of so called Sadakhlo interchange. Following the great distance, no probability of any kind of impact is the case and no detailed consideration of the given issue was considered purposeful.

The biodiversity studies were accomplished in several stages, including the preliminary study, which was done at the Scoping stage and detailed study, which was accomplished at the EIA stage. The main accent during the study was made on sensitive species and habitats. Based on the information given in the present paragraph, the impact caused by the construction and operation of the road on the existing habitats/species was assessed.

5.3.1 Flora and vegetation cover

5.3.1.1 General description of the vegetation cover

The study area belongs to the geobotanical region of Kvemo Kartli Plain which covers the territory past the city of Tbilisi (Soganlugi), on the both banks of the river Mtkvari. It is located between Trialeti Ridge, Somkheta Ridge and Iori Plateau.

A small part of the territory in the region is covered with vegetation (one of the least vegetation covers in the regions of East Georgia). In addition, the natural vegetation is intensely transformed under the impact of human activities. This is particularly true with the lowlands, where the natural vegetation was changed by the cultural crops long ago. The vegetation cover spread on the territory of the region, despite its limited area, in respect of its typological structure and history of development, as well as modern successive exchange, is extremely diversified and presents a complex picture.

In a phytocenologic respect, the forest vegetation is diversified. Mountains forests with the dominant monodominant forests of Georgian oak (*Quercus iberica*) and Persian oak (*Quercus macranthera*) are common at the highest elevation. It is noteworthy that Persian oak descends quite low in the region (like in Eastern Trialeti in general). Hornbeam-oak forests (*Quercus iberica* + *Carpinus caucasica*) and polydominant hardwood plantations (*Georgian and Persian oaks, box elder - Fraxinus excelsior, hornbeam - Carpinus caucasica, lime - Tilia begoniifolia, field maple - Acer campestre*) are also common in this area.

Remnants of sparse arid forests have survived on the territory of the region (*mostly in the basins of the rivers Khrami and Algeti*): small plantations of Mt. Atlas mastic tree (*Pistacia mutica*) and hackberries (*Celtis caucasica*) forests. Many species typical to the sparse arid (light) forest are their part: Georgian maple (*Acer ibericum*), Balkan maple (*Acer hyrcanum*), buckthorn (*Rhamnus pallasii*), Christ's Thorn (*Paliurus spina christi*), funtic (*Cotinus coggygria*), sumach (*Rhus coriaria*), Georgian Honeysuckle (*Lonicera iberica*), jasmin (*Jasminum fruticans*), etc..

In the floodplains of the rivers Mtkvari and Khrami, there are remnants of vast floodplain forests (which have survived the destruction): willow forest (*Salix excelsa, S. alba, S. pseudomedemii*) and poplar-willow forest (*Salix excelsa + Populus canescens + P. nigra*), species common to their phytocenosis (elm - *Ulmus minor*, common oak - *Quercus pedunculiflora*, mulberry - *Morus alba*, gaiter-tree - *Sida australis*, tamarisk - *Tamarix ramosissima*, blackthorn - *Prunus spinosa*, silkvine - *Periploca graeca*, blackberry - *Rubus anatolicus*, sea-buckthorn - *Hippophaë rhamnoides*, traveller's joy - *Clematis orientalis*, etc.).

Hemicryptophyte and xerophilous bushes grow on the slopes of the hillocks and plateaus. They are presented by many different formations: Bushes of Christ's thorn (*Paliurus spina christi*), bushes of spiraea (*Spiraea hypericifolia*), bushes of buckthorn (*Rhamnus pallasii*), bushes of oriental hornbeam (*Carpinus*

orientalis), Mixtofruticeta, etc.

Over the dry eroded slopes, there are bushes of astragalus (*Astragalus microcephalus*) and prickly-thrift (*Acantholimon lepturoides*) spread.

Steppe vegetation is common all over the territory of the region (*plains, plateaus, slopes of the hillocks*), mostly on the Chernozem-like soils. Beard-grass (*Botriochloa ischaemum*) and Artemisia formations-beard-grass (*Botriochloa ischaemum + Artemisia lerchiana*) are widely spread.

Common species in the elevated part of the territory are bushes of Jerusalem Thorn and Beard grass (*Paliurus spina christi – Botriochloa ischaemum*), feather-grasses (*Stipa lessingiana, St. pulcherrima*) and gramineous herb meadow steppe groups *Festucavalesiaca, Bromus japonicus, Phleum phleoides, Ph. paniculatum, Cynodondactylon, Achillea Biebersteinii, Filago arvensis, Salvia sclarea, Xeranthemum squarrosum, etc.*

Semi-desert plants are mostly developed in lowland areas, on dark and salt soils. This vegetation is mainly presented by Artemisia formations (*Artemisia lerchiana*). *Atriplex cana* formations (*Salsola nodulosa*) and other formations of semi-desert plants are relatively rare. Edifier (*wormwood*) is often an absolute dominant of Artemisia formations. Other common species are *Caragana grandiflora, Sterigmostemum torulosum, Torularia torulosa, etc.*

Ephemers and ephemeroids: *Alisum tortuosum, Gagea dubia, Medicago minima, Pterotheca sancta, Trachynia distachya, etc.* develop in great numbers in the cenoses in spring. Semi-desert with Artemisia formations are the best winter pastures (mostly for sheep).

Marsh vegetation is developed along the banks of the water reservoirs and rivers, mostly as small sections. They are dominated by cattail formations (*Typhalatifolia, T. laxmannii*).

One of the most interesting units within the limits of the geobotanical region of Kvemo Kartli is Iagluja Hillock. It is stretched for 17 km from west to east. The hillock is built with the neogenic conglomerates drifted from Trialeti and sandstones. The average height of the hillock is not great (max. 766 m asl). The Hillock is almost deprived of a hydrographic network (it is waterless with only temporal salt springs in it).

The vegetation cover of Iagluja Hillock is very interesting with its genesis and structure. Today, there are remnants of sparse arid forest survived in the area. In the past, here grew Mt. Atlas mastic tree, hackberries and juniper plantation phytocenoses. Artemisia formations (*Artemisia lerchiana*) and beard-grass-Artemisia formations (*Artemisia lerchiana + Botriochloa ischaemum*) are widely spread. Steppe vegetation: beard-grass (*Botriochloa ischaemum*), *Festuca supina*-beard-grass (*Botriochloa ischaemum + Festuca valesiaca*), feather-grass (*Stipa lessingiana, St. pulcherrima*), feather-grass-*Festuca supina*-beard-grass and xerophilous bushes: Bushes of Christ's thorn (*Paliurus spina christi*) and astragalus formations (*Astragalus microcephalus*) cover large areas. Ephemers and annual vegetations: *Bromus japonicus, Echinaria capitata, Medicago minima, Poa bulbosa, Salvia viridis, Trachynia distachya, Trifolium arvense* and many others grow in great numbers in hytocenoses (mostly, in grass formations). In early spring, very beautiful geophytes – lilac (*Iris iberica, I. pumila*) and Giant Gagea (*Gagea commutata*), etc. grow in the phytocenoses.

5.3.1.2 Detailed botanical study of the study area

A field study was undertaken within the limits of the study area. The goal of the field study was to explore the baseline condition of the plant species in the study area and provide a detailed botanical study of the territory.

The major goal of the floristic study was to identify the plant species, sensitive habitats and communities, which will be under the impact in the construction corridor. The distribution of the plant communities registered in the area was fixed with GPS coordinates.

The Latin names of the plants referred to in the text will be obtained according to the Second edition of “Flora of Georgia” (I-XIV volumes, 1987-1996, N. Ketskhoveli, A. Kharadze, R. Gagnidze); Plant Nomenclature List (2005, R. Gagnidze) and Botanical Dictionary 1991, A. Makashvili).

Floristic assessment covered two components: (1) collection of the detailed data about the diversity of the habitats common in the project corridors, and (2) field sampling of the vegetation growing in the corridors to obtain the accurate information about floristic diversity.

Sampling squares of 10x10 m² area were used for the detailed study of the vegetation cover. Sampling was done from various types of habitats presented in the proposed corridor. Alongside with the inventory of the generic diversity of the plants, the coverage of each species of the total projection coverage was identified. Modified Braun-Blanquet Scale converted in percentage terms of coverage of relevant species was used to identify the coverage of concrete species (See Table 5.3.1.2.1.).

Table 5.3.1.2.1. Traditional Braun-Blanquet Scale (Peet & Roberts, 2013)

Coverage area	Braun-Blanquet
One individual	r
Small, sparsely distributed	+
0–1%	1
1–2%	1
2–3%	1
3–5%	1
5–10%	2
10–25%	2
25–33%	3
33–50%	3
50–75%	4
75–90%	5
90–95%	5
95–100%	5

The field survey identified the percentage coverage areas of various species in the total protection cover for each sampled section. Tables showing the composition and coverage of the plants were developed for each described section. The floristic description of the project corridor is given below.

1. Vegetation in agricultural settlements and on plots of field 62GE04

Coordinates: X: 0493914; Y: 4582690 - X: 0493914Y: 4582690


Vegetation in agricultural settlements and on plots of field 62GE04 is fixed along the given section of the study area, in particular, degraded forest fragments, roadside landscape and private plots are fixed along the given section of the study area.

The following species dominate in the degraded forest fragments: aspen (*Populus spp.*); oleaster (*Elaeagnus angustifolia*), Gleditschia (*Gleditschia triacanthos*), mulberry (*Morus alba*), with mixed cherry plum (*Prunus divaricata*), willow (*Salix spp*), nut (*Corylus avellana*), blackberry (*Rubus caesius*), hawthorn (*Crataegus spp*), dog-rose (*Rosa canina*), etc.

The following species grow in the wind break belts along the roads: aspen (*Populus spp*), Gleditschia (*Gleditschia triacanthos*), mulberry (*Morus alba*), with mixed cherry plum (*Prunus divaricata*), nut (*Corylus avellana*), blackberry (*Rubus caesius*), dog-rose (*Rosa canina*), etc. The conservation value of

the given section is low.

Results of floristic inventory in the corridor

Coordinates: X: 0493914 Y: 4582690 - X: 0493914 Y: 4582690			
List of species / projection coverage 60(%)			
Conservation value	Low		
<i>Populus spp.</i>	3	<i>Prunus spinosa</i>	1
<i>Acacia dealbata</i>	2	<i>Rosa canina</i>	2
<i>Tamarix ramosissima</i>	+	<i>Corylus avellana</i>	2
<i>Prunus divaricate</i>	1	<i>Salvia viridis</i>	3
<i>Elaeagnus angustifolia</i>	3	<i>Bromus japonicas</i>	1
<i>Morus alba</i>	2	<i>Poa bulbosa</i>	1
<i>Salix spp</i>	1	<i>Taraxacum officinale</i>	2
<i>Rubus caesius</i>	3	<i>Leucanthemum vulgare</i>	2
<i>Crataegus spp</i>	+	<i>Sambucus ebulus</i>	1

Type of habitat: Vegetation in agricultural settlements and on plots of field 62GE04

2. Vegetation in agricultural settlements and on plots of field 62GE04


Coordinates: X: 0495804 Y: 4583367 - X: 0495803 Y: 4583367

Vegetation in agricultural settlements and on plots of field 62GE04 is fixed along the given section of the study area, in particular, degraded roadside landscape, private plots and marsh vegetation is fixed along the given section of the study area.

The following species dominate in the degraded roadside landscape: aspen (*Populus spp.*); oleaster (*Elaeagnus angustifolia*), acacia (*Acacia dealbata*), Gleditschia (*Gleditschia triacanthos*), mulberry (*Morus alba*), with mixed willow (*Salix spp*), cherry plum (*Prunus divaricata*), blackberry (*Rubus caesius*), dog-rose (*Rosa canina*), etc. Marsh vegetation is dominated by *Typha Latifolia*.

The conservation value of the given section is Medium.

Results of floristic inventory in the corridor

Coordinates: X: 0495804 Y: 4583367 - X: 0495803 Y: 4583367			
List of species / projection coverage 50(%)			
Conservation value	Medium		
<i>Populus spp.</i>	3	<i>Rosa canina</i>	2
<i>Acacia dealbata</i>	1	<i>Typha Latifolia</i>	3
<i>Gleditschia triacanthos</i>	2	<i>Salvia viridis</i>	3
<i>Morus alba</i>	2	<i>Bromus japonicas</i>	1
<i>Prunus divaricate</i>	1	<i>Poa bulbosa</i>	1
<i>Elaeagnus angustifolia</i>	3	<i>Taraxacum officinale</i>	1
<i>Salix spp</i>	1	<i>Leucanthemum vulgare</i>	1
<i>Rubus caesius</i>	3	<i>Sambucus ebulus</i>	1

Type of habitat: Vegetation in agricultural settlements and on plots of field 62GE04


3. Vegetation in agricultural settlements and on plots of field 62GE04

Coordinates: X: 0492746 Y: 4580490 - X: 0492741 Y: 4580484

Vegetation in agricultural settlements and on plots of field 62GE04 is fixed along the given section of the study area, in particular, degraded roadside landscapes and private plots. The dominating species in the degraded landscape are as follows: aspen (*Populus spp*), oleaster (*Elaeagnus angustifolia*), acacia (*Acacia dealbata*), Gleditschia (*Gleditschia triacanthos*), mulberry (*Morus alba*), with mixed willow (*Salix spp*), cherry plum (*Prunus divaricata*), chestnut (*Juglans regia*), blackberry (*Rubus caesius*), dog-rose (*Rosa canina*), etc.

New chestrun plantations and agricultural crops (onion) are fixed in the private plot. The conservation value of the given section is Medium.

Results of floristic inventory in the corridor

Coordinates: X: 0492746 Y: 4580490 - X: 0492741 Y: 4580484		
List of species / projection coverage 60(%)		
Conservation value	Medium	
<i>Populus spp.</i>	3	<i>Rubus caesius</i> 3
<i>Acacia dealbata</i>	1	<i>Rosa canina</i> 2
<i>Gleditschia triacanthos</i>	2	<i>Salvia viridis</i> 3
<i>Morus alba</i>	2	<i>Bromus japonicas</i> 1
<i>Prunus divaricate</i>	1	<i>Poa bulbosa</i> 1
<i>Elaeagnus angustifolia</i>	3	<i>Taraxacum officinale</i> 1
<i>Salix spp - ὄσπρογο</i>	1	<i>Leucanthemum vulgare</i> 1
	+	<i>Sambucus ebulus</i> 1

Type of habitat: Vegetation in agricultural settlements and on plots of field 62GE04

4. Vegetation in agricultural settlements and on plots of field 62GE04


Coordinates: X: 0487816 Y: 4578377- X: 0487809 Y: 4578379

Vegetation in agricultural settlements and on plots of field 62GE04 is fixed along the given section of the study area, in particular, the following species are fixed along the given section: degraded roadside landscape and private plots.

The following species dominate in the degraded roadside landscape: aspen (*Populus spp*), oleaster (*Elaeagnus angustifolia*), acacia (*Acacia dealbata*), Gleditschia (*Gleditschia triacanthos*), mulberry (*Morus alba*), with mixed chestnut (*Juglans regia*), cherry plum (*Prunus divaricata*), blackberry (*Rubus caesius*), dog-rose (*Rosa canina*), etc. There are damaged and overdried chestnut trees fixed in the study area.

There are agricultural crops in the private plots. The conservation value of the given section is Medium.

Results of floristic inventory in the corridor

Coordinates: X: 0487816 Y: 4578377- X: 0487809 Y: 4578379			
List of species / projection coverage 70(%)			
Conservation value	Medium		
<i>Populus spp.</i>	2	<i>Rubus caesius</i>	3
<i>Gleditschia triacanthos</i>	3	<i>Corylus avellana</i>	2
<i>Acacia dealbata</i>	2	<i>Rosa canina</i>	1
<i>Prunus divaricate</i>	1	<i>Salvia viridis</i>	3
<i>Elaeagnus angustifolia</i>	3	<i>Poa bulbosa</i>	1
<i>Morus alba</i>	2	<i>Taraxacum officinale</i>	1
<i>Diospyros lotus</i>	2	<i>Leucanthemum vulgare</i>	2
<i>Juglans regia</i> ■ ⁵	1	<i>Sambucus ebulus</i>	+

Type of habitat: Vegetation in agricultural settlements and on plots of field 62GE04

⁵ Symbols used ■ - Georgian Red-Listed species.

5. Vegetation in agricultural settlements and on plots of field 62GE04

Coordinates: X: 0489151 Y: 4578835 - X: 0489145 Y: 4578834

Vegetation in agricultural settlements and on plots of field 62GE04 is fixed along the given section of the study area, in particular, the following species are fixed along the given section: degraded roadside landscape as a wind break belt and private plots.

The following species dominate in the degraded win break landscape: Gleditschia (Gleditschia triacanthos), aspen (Populus spp), mulberry (Morus alba), with mixed acacia (Acacia dealbata), oleaster (Elaeagnus angustifolia), cherry plum (Prunus divaricata), blackberry (Rubus caesius), dog-rose (Rosa canina), etc.

As for the private plots, there are agricultural crops growing in them. The conservation value of the given section is low.

Areas sowed with agricultural crops



Type of habitat: Vegetation in agricultural settlements and on plots of field 62GE04


6. Riverside forest

Coordinates: X: 0485585 Y: 4577637 - X: 0485584 Y: 4577637

The following species dominate and various species of willows grow in great numbers in the riverside floodplain along the given section of the study area: Salix spp. and ash tree - Alnus barbata, with mixed: Populus spp., Ulmus minor, Morus alba, Acer campestre, Acacia dealbata, Tilia begoniifolia, Svida australis, Tamarix ramosissima, Prunus spinosa, Rubus anatolicus, Hippophaë rhamnoides, Elaeagnus angustifolia, etc. Chestnut (Juglans regia) is mixed as some individuals.

Christ's thorn (Paliurus spina-christi), with mixed Hippophaë rhamnoides Rubus caesius, Corylus avellana, Crataegus spp, Rosa canina, etc. dominate over the slopes. The conservation value of the given section is Medium.

Results of floristic inventory in the corridor

Coordinates: X: 0485585 Y: 4577637 - X: 0485584 Y: 4577637		
List of species / projection coverage 70(%)		
Conservation value	Medium	
<i>Salix spp</i>	4	<i>Rubus caesius</i> 3
<i>Populus spp.</i>	2	<i>Prunus spinosa</i> +
<i>Alnus barbata</i>	3	<i>Rosa canina</i> 1
<i>Acacia dealbata</i>	2	<i>Corylus avellana</i> 2
<i>Prunus divaricate</i>	1	<i>Paliurus spina-christi</i> 2
<i>Elaeagnus angustifolia</i>	3	<i>Hippophaë rhamnoides</i> 1
<i>Morus alba</i>	2	<i>Rhamnus pallasii</i> +
<i>Juglans regia</i> ■	+	<i>Crataegus spp</i> +
<i>Ulmus minor,</i>	1	<i>Sambucus ebulus</i> 1
<i>Acer campestre</i>	+	<i>Salvia viridis</i> 1
<i>Tilia begoniifolia</i>	1	<i>Taraxacum officinale</i> 2
<i>Svida australis,</i>	+	<i>Leucanthemum vulgare</i> 1
<i>Tamarix ramosissima,</i>	+	<i>Urtica spp</i> +

Type of habitat:91E0* Georgian Code: Riverside forest

Habitat sub-type: 91E0 *01. Stone riverbank vegetation

7. Vegetation in agricultural settlements and on plots of field 62GE04

Coordinates: X: 0485061 Y: 4577414; X: 0485061 Y: 4577414; X: 0485014 Y: 4577329; X: 0484833 Y: 4577128; X: 0484832 Y: 4577123

Vegetation in agricultural settlements and on plots of field 62GE04 are fixed along the given section of the study area, in particular, the following species are fixed along the given section: degraded roadside landscape as a wind break belt and private plots.

The following species dominate in the degraded roadside wind break landscape: Gleditschia (*Gleditschia triacanthos*), aspen (*Populus spp*), mulberry (*Morus alba*), acacia (*Acacia dealbata*), with mixed cherry plum (*Prunus divaricata*), lime (*Tilia begoniifolia*), box elder - *Fraxinus excelsior*, pine-tree (*Pinus spp.*), cedar (*Cupressus sempervirens*), blackberry (*Rubus caesius*), dog-rose (*Rosa canina*), etc.

As for the private plots, there are agricultural crops growing in them. The conservation value of the given section is low.

Agricultural crops growing in the plots



Type of habitat: Vegetation in agricultural settlements and on plots of field 62GE04

8. Vegetation in agricultural settlements and on plots of field 62GE0

Coordinates: Coordinates:X:0485496Y:4564139;X:0485043Y:4564310;X:0483569Y:4566195;X:0483569Y:4566195;X:0483032Y:4567885;X:0483031Y:4567885;X:0482695Y:4569730





Vegetation in agricultural settlements and on plots of field 62GE04 is fixed along the given section of the study area, in particular, degraded roadside landscape as a wind break belt, remnants of sparse arid forest and private plots are fixed along the given section of the study area.

The following species dominate in the degraded roadside landscape: Gleditschia (*Gleditschia triacanthos*), aspen (*Populus spp*), mulberry (*Morus alba*), acacia (*Acacia dealbata*), oleaster (*Elaeagnus angustifolia*), with mixed: lime (*Tilia begoniifolia*), box elder (*Fraxinusexcelsior*), pine-tree (*Pinus spp.*), cedar (*Cupressus sempervirens*), chestnut (*Juglans regia*), cherry plum (*Prunus divaricata*), willow (*Salix spp*), კედიანი (*Cadrus deodara*), blackberry (*Rubus caesius*), Christ's thorn (*Paliurus spina-christi*), dog-rose (*Rosa canina*),

nut(Corylus avellana), etc. as some individuals with mixed *Celtis glabrata*. Damaged and overdried chestnut trees are fixed in the study area.

Agricultural crops grow in the private plots. Damaged and overdried chestnut trees are fixed in the study area. In addition, the pines along the roadsides in the study area are being damaged and dried. The conservation value of the given section is Medium.

Results of floristic inventory in the corridor

Coordinates: X: 0485496 Y: 4564139; X: 0485043 Y: 4564310; X: 0483569 Y: 4566195; X: 0483569 Y: 4566195; X: 0483032 Y: 4567885; X: 0483031 Y: 4567885; X: 0482695 Y: 4569730			
List of species / projection coverage 70(%)			
Conservation value	Medium		
<i>Gleditschia triacanthos</i>	3	<i>Cadmus deodara</i>	+
<i>Salix spp</i>	+	<i>Rubus caesius</i>	3
<i>Populus spp.</i>	2	<i>Crataegus spp</i>	+
<i>Acacia dealbata</i>	2	<i>Rosa canina</i>	1
<i>Prunus divaricate</i>	1	<i>Corylus avellana</i>	2
<i>Elaeagnus angustifolia</i>	2	<i>Paliurus spina-christi</i>	3
<i>Morus alba</i>	3	<i>Hippophaë rhamnoides</i>	2
<i>Juglans regia</i> ■	1	<i>Rhamnus pallasii</i>	+
<i>Celtis glabrata</i> ■	+	<i>Sambucus ebulus</i>	1
<i>Tilia begoniifolia</i>	1	<i>Urtica spp</i>	+
<i>Fraxinus excelsior</i>	1	<i>Salvia viridis</i>	1
<i>Pinus spp.</i>	2	<i>Taraxacum officinale</i>	2
<i>Cupressus sempervirens</i>	2	<i>Leucanthemum vulgare</i>	1

Type of habitat: Vegetation in agricultural settlements and on plots of field 62GE04

9. Vegetation in agricultural settlements and on plots of field 62GE04





Coordinates: X: 0482692 Y: 4569729; X: 0482719 Y: 4596744; X: 0482717 Y: 4571778; X: 0482721 Y: 4571775; X: 0482706 Y: 4573799; X: 0483969 Y: 4575641; X: 0483968 Y: 4575641;

The vegetation of agricultural settlements and plots of field 62GE04 is fixed along the given section of the study area, in particular, degraded roadside wind break landscape.

The following species dominate in the degraded roadside landscape: *Gleditschia triacanthos*, aspen (*Populus spp*), mulberry (*Morus alba*), acacia (*Acacia dealbata*), with mixed lime (*Tilia begoniifolia*), box elder (*Fraxinus excelsior*), pine-tree (*Pinus spp.*), cedar (*Cupressus sempervirens*), chestnut (*Juglans regia*), cherry plum (*Prunus divaricata*), willow (*Salix spp*), blackberry (*Rubus caesius*), Christ's thorn (*Paliurus spina-christi*), dog-rose (*Rosa canina*), nut (*Corylus avellana*), etc. as individual species with mixed cedar (*Cadrus deodara*). Damaged and overdried chestnut trees are fixed in the study area.

Agricultural crops grow in the private plots. Damaged and overdried chestnut trees are fixed in the study area. In addition, the pines along the roadsides in the study area are being damaged and dried. The conservation value of the given section is Medium.

Results of floristic inventory in the corridor

Coordinates: X: 0482692 Y: 4569729; X: 0482719 Y: 4596744; X: 0482717 Y: 4571778; X: 0482721 Y: 4571775; X: 0482706 Y: 4573799; X: 0483969 Y: 4575641; X: 0483968 Y: 4575641				
List of species / projection coverage 60(%)				
Conservation value	Medium			
<i>Gleditschia (Gleditschia triacanthos)</i> ,	3	<i>Rubus caesius -blackberry</i>		3
<i>Salix spp -willow</i>	+	<i>Crataegus spp -hawthorn</i>		+
<i>Populus spp. -aspen</i>	2	<i>Rosa canina-dog-rose</i>		1

<i>acacia (Acacia dealbata)</i>	2	<i>Corylus avellana - nut</i>	2
<i>Prunus divaricate - cherry plum</i>	1	<i>Paliurus spina-christi -Christ's thorn</i>	3
<i>lime (Tilia begoniifolia)</i>	1	<i>Hippophaë rhamnoides - sea-buckthorn</i>	2
<i>Morus albamulberry</i>	3	<i>Rhamnus pallasii - buckthorn</i>	+
<i>Juglans regia</i> ■ <i>Walnut</i>	1	<i>Sambucus ebulus - danewort</i>	1
<i>box elder - Fraxinusexcelsior</i>	1	<i>Urtica spp-nettle</i>	+
<i>pine-tree (Pinus spp.)</i>	2	<i>Salvia viridis- annual grasses</i>	1
<i>cedar (Cupressus sempervirens)</i>	2	<i>Taraxacum officinale - dandelion</i>	2
<i>cedar (Cadrus deodara)</i>	r	<i>Leucanthemum vulgare - oxeye dais</i>	1

Type of habitat: Vegetation in agricultural settlements and on plots of field 62GE04

5.3.1.3 Red-Listed Species

As a result of the detailed study, two Georgian Red-Listed species were identified in the project area: Walnut tree (*Juglans regia*) and Iguana hackberry (*Celtis glabrata*).

English	Latin	Conservation status	Basis for including on the Red List of Georgia
Iguana hackberry	<i>Celtis glabrata</i>	VU	Small, fragmented area
Walnut tree	<i>Juglans regia</i>	VU	Small, fragmented area

5.3.2 Taxation results of timber resources in the project area

Algeti-Sadakhlo project corridor does not cross naturally forested/Forest Fund territories. Despite this, the works of registration of timber resources (taxation) were undertaken in the project corridor.

The field works were accomplished in line with Decree #179 of the government of Georgia of July 17, 2013 "On Approving the Rule of forest taxation and monitoring". The trees were registered in different quarters. (See Annex 4).

During the taxation of individual trees, all timber species with 8-cm or more diameters were taxed on the taxation area, depending on the thickness grades. We identified the altitudinal degree and calculated the volumes for timber wood species. Besides, all bushes and sprouts with the diameter of less than 8 cm were taxed.

Table 5.3.2.1. gives the list of timber wood and non-timber wood species spread in the study area.

Table 5.3.2.1. Results of taxation undertaken in the project corridor

#	Name of species		Qty, pcs.	Volume, cub.m.	Note
	English	Latin			
1	<i>Gleditschia</i>	<i>Gleditsia caspia</i>	6	0.236	
2	<i>Silver wattle</i>	<i>Acacia dealbata</i>	39	1.144	
3	<i>Aspen</i>	<i>Populus alba</i>	6	2.436	
4	<i>White</i>	<i>Populus pyramidalis</i>	13	16.54	

	<i>Poplar</i>				
5	<i>Mulberry</i>	<i>Morus alba</i>	56	22.534	
6	<i>Cherry plum</i>	<i>Prunus insititia</i>	6	0.147	
<i>< 8 cm diameter</i>					
1	<i>Silver wattle</i>	<i>Acacia dealbata</i>	275	0.15	
2	<i>Elm tree</i>	<i>Ulmus foliacea</i>	30	0.05	
3	<i>Mulberry</i>	<i>Morus alba</i>	65	0.05	
4	<i>Aspen</i>	<i>Populus alba</i>	101	0.1	
5	<i>Cherry plum</i>	<i>Prunus insititia</i>	125	0.05	
6	<i>Dogwood</i>	<i>Swida, Thelycrania</i>	55	0.005	
7	<i>Blackberry</i>	<i>Rubus caesius</i>	1650	0.005	
	<i>Total</i>		2427	43.447	

5.3.2 Fauna and their habitats

5.3.2.1 General description of the project corridor

The major animal species common in the corridor envisaged by the project and in its adjacent area are those typical to the steppes. The number of forest species is quite reduced as a result of the small forested areas and strong anthropogenic impact.

The study area covers the section running across the territory of Marneuli Municipality, from Sadakhlo interchange planned east of village Azizkendi to Sadakhlo checkpoint (Algeti-Sadakhlo section). In a geographical respect, this territory covers Kvemo Kratli Plain, which is an extreme north-western part of Kura-Araxes vast Plain. The corridor and its adjoining areas mostly cover the landscapes of arid semi-desert plains and agricultural landscapes. Mostly plain and valley vegetation dominates in the study area - the beard-and-feather-grass and thornbush-thorny steppe, sparse hemixelous and floodplain and semi-desert vegetation. Consequently, the project corridor is quite poor in the number and generic diversity of the vegetation cover. The main component of bushy vegetation is shibliak (Christ's thorn, astragalus).

The major part of the study corridor is agricultural plots (See Figures 5.3.3.1.1.), which in respect of biodiversity, have a low conservative value.

Figures 5.3.2.1.1. agricultural plots



The study area covers the section crossing river Khrami near village Kurtlari and a section up to the last point of village Zemo Sarali (left bank zone of river Debeda) (See Figures 5.3.3.1.2.). Intensely degraded derivatives of floodplain forests survive as individual zones on the territory. At present, major part of them is cut down. The Scoping Report named them as the sites with a relatively higher risk; great attention was given to the signs of vital activity of Otter (*Lutra lutra*) during the field visits. However, no signs of Otter present in bank zone of Debeda River were found. No species of high conservative value were identified in the gives areas.

Figures 5.3.2.1.2. Floodplain terrace of Debeda River



5.3.2.2 Animal species common in the project corridor and adjacent to it, mammals:

As the literary sources suggest, the following animal species are spread within the project area: Red fox (*Vulpes vulpes*), jackal (*Canis aureus*), European hare (*Lepus europaeus*) and populations of some other small mammals, such as field mouse (*Apodemus agrarius*), European water vole (*Arvicola terrestris*), Caucasian Mole (*Talpa caucasica*), vesper bats (*Vespertilionidae*), European hedgehog (*Erinaceus europaeus*). As the local residents inform, a wolf (*Canis lupus*) is present in the floodplains adjacent to the rivers and steppes in the environs of the study area.

The project corridor itself is not an important habitat for mammals, as it is mainly presented as fields and arable and sowing lands and there is already a motor road across it. During the accomplished studies, 2 of the literary known species were identified in the field, including:

Of Muridae, the holes of the Striped field mouse (*Apodemus agrarius*) were found. (See Figure 5.3.3.2.1.), This species is widely spread all over the territory of Georgia and mostly lives in the agricultural plots of field. During the periods of massive propagation, they cause mass destruction of harvest (wheat, barley, corn, etc.).



Figure 5.3.2.2.1. Hole of a field mouse

Besides, the holes of the European water vole (*Arvicola terrestris*) were found across Debeda River. European water vole is a mammal with the length of up to 24 cm associated with water bodies (rivers, lakes). It is spread in Europe, Northern and partially in Southwest Asia. It is common almost all over the territory of Georgia. It feeds on vegetation, molluscs and insects.

As already mentioned, during the survey, attention was paid to the study of the coastline of the objects crossing the corridor and identification of the signs of water-loving mammals (including Otter (*Lutra lutra*), which is the Georgian Red-Listed species). However, the survey did not reveal any tracks of this species or habitats attractive for Otter. Besides, no sensitive sites attractive for numerous bat colonies to live were identified.

Based on the results of the literary data and field visits, the following mammals were identified within the project area:

Table 5.3.2.2.1. Mammals common in the project area

Nº	Latin name	English name	Red List	IUCN	Bern Convention	Literary data	Identified during the survey
1	<i>Erinaceus concolor Martin.</i>	Hedgehog		LC		+	-
2	<i>Vulpes vulpes</i>	Red fox		LC		+	-
3	<i>Canis aureus</i>	Jackal		LC		+	-
4	<i>Lepus europaeus</i>	European hare		LC		+	-
5	<i>Apodemus agrarius</i>	Striped field mouse		LC		+	+
6	<i>Talpa caucasica</i>	Caucasian mole		LC		+	
7	<i>Arvicola terrestris</i>	European water vole				+	+
8	<i>Canis lupus</i>	Wolf		LC	II	+	-
9	<i>Dryomys</i>	Forest		LC		+	-

	<i>nitedula Pallas.</i>	dormouse					
--	-------------------------	----------	--	--	--	--	--

IUCN Red List categories:

CR = Critically Endangered

EN = Threatened.

VU = Vulnerable

NT = Near Threatened.

LC = Least Concern.

Birds:

Georgia is an important area for west palearctic birds, as one of their major immigration routes runs across the country (Black Sea basin, Javakheti and Dedioplistskaro). However, the study area itself is not an important migration route, so called “narrow neck”, stopping, resting or wintering place.

The majority of the bird species found in the area are widely spread all over Georgia. Besides, their populations are numerous.

The majority of the bird species identified in the study area are bush-loving species. There are also species associated with cliffy places.

Paridae - Great tit (*Parus major*) was fixed in the area. This species is known to be common for almost all types of habitats; however, it prefers forest habitat for breeding.

Laniidae - Red-backed Shrike (*Lanius collurio*) was seen in the field. It lives in the open spaces covered with bushes and trees (field, recreational forests).

Turdidae - Mistle Thrush (*Turdus viscivorus*) and thrush (*Turdus merula*) was seen in the field. These species are common in different types of forests, gardens, bushes and recreational parks.

Passer - Eurasian tree sparrow (*Passer montanus*) was fixed in the area. This species lives almost all over Georgia, in the forests (mostly sparse forests) and fields. Figure 5.3.2.2.2.



Figure 5.3.2.2.2. Eurasian tree sparrow (*Passer montanus*)

Corvidae - Black-billed Magpie (*Pica pica*) See Figure 5.3.2.2.3, rook (*Corvus frugilegus*) See Figure 5.3.3.2.4. and Carrion (*Corvus corone*) See Figure 5.3.3.2.5. were seen in the study area. These species have wide areas of distribution and diversified habitats (forest edges, gardens, recreational forests, valleys, wind-break belts and people's habitats).



Figure 5.3.2.2.3. Nest fo a Black-billed Magpie (*Pica pica*)



Figure 5.3.2.2.4. Rook (*Corvus frugilegus*)



Figure 5.3.2.2.5. Carrion (*Corvus corone*)

Motacillidae - white wagtail (*Motacilla alba*) was fixed in the study area See Figure 5.3.3.2.6. This species is widely spread all over Georgia and lives (and breeds) on the banks of the rivers and water bodies.



Figure 5.3.2.2.6. Common Swift (*Motacilla alba*)

Apodiformes - Common Swift (*Apus apus*) was found in the area. This species prefers open areas, mountain and plain steppes, semi-deserts, etc. as its habitats.

Coraciidae - European Roller (*Coracias garrulus*) was seen in the study area. This species mainly lives in the steppe forest habitats and rarely in sparse forests.

Cuckoos - Cuckoo (*Cuculus canorus*) was seen in the area. See Figure 5.3.3.2.7. This species is widely spread both, in sparse forests and in the fields covered with bushes. This species is spread almost all over the territory of Georgia.



Figure 5.3.2.2.7. Cuckoo - (*Cuculus canorus*)

Sturnidae - Flocks of starling (*Sturnus vulgaris*) were seen during the field studies. This species commonly nests as colonies in sparse forests, bushes, agricultural plots and people's dwelling areas.

Accipitridae – Common Buzzard (*Buteo buteo*) was seen in the area. This species feeds on rodents and other small animals and chooses both, forests and open fields as its habitat.

Phasianidae – of the Phasianidae, quail (*Coturnix coturnix*) was seen in the area. This species is common all over Georgia and lives in the valleys and fields and alpine meadows.

Based on the literary data and surveys, we can conclude that the following bird species are common in the project area:

Table 5.3.2.2.2. Bird species common in the project area

№	Latin name	Georgian name	Red List	IUCN	Bern Convention	Season	Literary data	Identified during the survey
1	Motacilla alba	Literary data		LC	II	YR-R, M	+	+
2	Apus apus	Literary data		LC		BB, M	+	+
3	Merops apiaster	Literary data		LC	II	BB, M	+	-
4	Corvus cornix	Literary data		LC		YR-R	+	+
5	Garrulus glandarius	Literary data		LC		YR-R	+	+
6	Turdus merula	Literary data		LC		YR-R	+	+
7	Delichon urbicum	Literary data		LC	II	BB, M	+	+

8	<i>Sturnus vulgaris</i>	Starling		LC		YR-R, M	+	+
9	<i>Columba livia</i>	Rock dove		LC		YR-R	+	-
10	<i>Columba oenas</i>	Stork dove		LC		YR-R	+	-
11	<i>Columba palumbus</i>	Common wood pigeon		LC		YR-R	+	-
12	<i>Hirundo rustica</i>	Barn swallow		LC	II	BB, M	+	+
13	<i>Oriolus oriolus</i>	Eurasian golden oriole		LC	II	BB, M	+	-
14	<i>Turdus viscivorus</i>	Mistle thrush		LC		YR-R	+	+
15	<i>Erithacus rubecula</i>	European robin		LC	II	YR-R	+	-
16	<i>Fringilla coelebs</i>	Chaffinch		LC		YR-R, M	+	+
17	<i>Cuculus canorus</i>	Cuckoo		LC		BB, M	+	+
18	<i>Phoenicurus phoenicurus</i>	common redstart		LC	II	BB, M	+	-
19	<i>Passer montanus</i>	Eurasian tree sparrow		LC		YR-R	+	+
20	<i>Carduelis carduelis</i>	European goldfinch		LC	II	YR-R, M	+	-
21	<i>Carduelis chloris</i>	European greenfinch		LC	II	YR-R, M	+	-
22	<i>Parus major</i>	Great tit		LC	II	YR-R	+	+
23	<i>Lanius collurio</i>	Red-backed shrike		LC	II	BB, M	+	+
24	<i>Turdus philomelos</i>	Song Thrush		LC		YR-R, M	+	-
25	<i>Aegithalos caudatus</i>	Long-tailed bushtit		LC		YR-R, M	+	-
26	<i>Falco tinnunculus</i>	Common Kestrel		LC	II	BB, M	+	+

27	Buteo buteo	Common Buzzard		LC	II	YR-R, M	+	+
28	Corvus frugilegus	Rook		LC		YR-R, M	+	+
29	Pica pica	Black-billed Magpie		LC		YR-R	+	+
30	Coracias garrulus	European Roller		LC	II	BB, M	+	+
31	Coturnix coturnix	Quail		LC		YR-R, M	+	+

Species seasonal life history at a given site:

YR-R = Year-round resident; breeder, present throughout the year.

YR-V = Year-round visitor; non-breeder, present throughout the year.

BB = Breeding bird; breeder, absent during non-breeding period.

SV = Summer visitor; non-breeder, present in spring and summer.

WV = Winter visitor; non-breeder, present in late fall, winter and early spring

M = Migrant; bird of passage; present primarily in fall and spring.

IUCN Red List categories:

CR = Critically Endangered

EN = Threatened.

VU = Vulnerable

NT = Near Threatened.

LC = Least Concern.

Reptiles:

As already mentioned, the project area is quite a poor ecosystem in respect of biodiversity, as mainly agricultural plots present there. Consequently, the herpetofauna there is very poor as well. The field visits incorporated visual registration of reptiles. 4 out of 6 literary known species were identified on site.

Grass snake (*Natrix Natrix*) was seen in the study area (See Figure 5.3.3.2.8.). This is the species associated with water and lives near the water reservoirs; it feeds on fish and amphibians, rarely on rodents. Of lizards, Medium lizard (*Lacerta media*) and European legless lizard (*Pseudopus apodus*) are spread in the project area See Figure 5.3.3.2.9). Mediterranean tortoise (*Testudo graeca*) (See Figure 5.3.3.2.10) was also fixed in the study area.

Grass snake (*Natrix natrix*)- lives near the rivers lakes, marshes, irrigation channels and water reservoirs, as well as in wet forests and bushy fields. They are rare in open steppes and mountains without forests. In summer and autumn, when the soil is humid, the snakes move far from water and dwell under the tree roots, rodents' holes, tree fissures, etc. and rarely in basements or garbage piles.



Figure 5.3.2.2.8. Grass snake (*Natrix natrix*)

European legless lizard (*Pseudopus apodus*) – is quite common lizard species in Georgia and its habitats are dry places. Its area in the construction area covers the project area.



Figure 5.3.2.2.9. European legless lizard (*Pseudopus apodus*)

Medium lizard (*Lacerta media*) – this species is common mostly in fields and sparse forests. Medium lizard may use the agricultural plots in the project area as a corridor during migration.

Mediterranean tortoise (*Testudo graeca*) lives in sparse forests, on meadows and steppes. Presently, its habitats are limited at many locations. It is on the Red List of Georgia.

Figure 5.3.2.2.10. Mediterranean tortoise (*Testudo graeca*).

Based on the literary data and results of field visits, the following reptile species are common in the project area:

Table 5.3.2.2.3. Reptiles common in the project area

Nº	Latin name	Georgian name	Red List	IUCN	Literary data	Identified during the survey
1	<i>Pseudopus apodus</i>	European legless lizard	NE	LC	+	+
2	<i>Anguis fragilis</i>	Deaf adder	NE	LC	+	-

3	<i>Lacerta media</i>	Medium lizard	LC	DD	+	+
4	<i>Vipera lebatina</i>	Levantine viper	NE	NT	+	-
5	<i>Testudo graeca</i>	Mediterranean tortoise	VU	VU	+	+
6	<i>Natrix natrix</i>	Grass snake	LC	LC	+	+

IUCN Red List categories:

CR = Critically Endangered

EN = Threatened.

VU = Vulnerable

NT = Near Threatened.

LC = Least Concern.

Amphibians:

Rivers Khrami and Debeda flow across the project area, which, in respect of biodiversity, are not a particular reservation.

1 of 3 tailless amphibians known from literature were seen in the field, in the river bank zone of the project area. Marsh frog (*Pelophylax ridibundus*) (See Figure 5.3.3.2.11.).

Marsh frog (*Pelophylax ridibundus*) is the most widely spread tailless amphibian in Georgia with LC (Least Concern) status worldwide.



Figure 5.3.2.2.10. Marsh frog

Based on the literary data and results of field visits, the following amphibian species are common in the project area:

Table 5.3.2.2.4. Amphibians common in the project area

Nº	Latin name	Georgian name	Red List	IUCN	Literary data	Identified during the survey
1	<i>Pelophylax ridibundus</i>	Marsh frog	LC	LC	+	+

2	<i>Rana macrocnemis</i>	Long-legged wood frog	LC	LC	+	-
3	<i>Hyla orientalis</i>	Eastern tree frog	LC	LC	+	-

IUCN Red List categories:

CR = Critically Endangered

EN = Threatened.

VU = Vulnerable

NT = Near Threatened.

LC = Least Concern

Fish:

Based on the literary data and results of field visits, the following species live in the river: Sevan khramulya (*Capaeta Capaeta*), common chub (*Leuciscuscephalus orientalis*), Kura barbel (*Barbuslacerta cyri*), Kura loach (*Nemachilus Brandti*).

5.3.3 Summary of biological environment survey results

The survey undertaken in several stages made it clear that Algeti-Sadakhlo project corridor is not distinguished for any component of diversity. The vegetation cover is very poor. Trees mainly grow at some locations, sometimes as isolated individuals. Mostly grassy, very sparse bushy and cultural/artificially grown plants grow there. No important animal habitats were identified as a result of high anthropogenic load on the corridor and low density of the vegetation cover.

The study corridor crosses mainly the habitat with the plants typical to agricultural settlements and plots. Degraded floodplain-type habitats are found on the sites crossing/running across the water objects (mainly rivers Khrami and Debeda). The degree of anthropogenic impact of the given habitat is also quite visible. The project corridor does not cross protected areas. No habitats typical to the said protected areas or similar to them were identified immediately in the project corridor. None of the studied plots was assessed as having a high conservative value.

During the field survey, we fixed the following Georgian Red-Listed species in the project corridor and near it:

Table 5.3.3.1. Red-Listed Species common in the project area

Nº	Georgian name	Latin name	Category of protection status
Plants:			
1	Walnut tree	<i>Juglas regia</i>	VU
2	Iguana hackberry	<i>Celtis glabrata</i>	VU
Reptiles:			
3	Mediterranean tortoise	<i>Testudo graeca</i>	VU

Despite this, the taxation undertaken in the project corridor did not identify the presence of Red-Listed plant species immediately in the project impact zone and the need for their delisting consequently.

5.4 Social-Economic Environment

5.4.1 General

Marneuli Municipality is included within the administrative borders of Kvemo Kartli Region. It is located in the south-eastern part of Georgia. The area of the Municipality is 935,2 sq.km and its altitude is 420 m asl. The Municipality has one city and 17 administrative-territorial units including 83 villages.

The administrative-territorial units are: Marneuli, Shulaveri, Kizilajlo, Kulari, Damia-Geurarkhi, Akhkerpi, Tserakvi, Algeti, Kachagani, Kutliari, Tamarisi, Khojorni, Kapanakhchi, Kasumlo and Opreti.

Marneuli, the center of Municipality, is distanced from Tbilisi by 29 km, by 48 m from the regional center Rustavi, by 30 km from Azerbaijan border and by 30 km from Armenian border.

5.4.2 Local population

In 2018, the population of Marneuli Municipality was 106,5 thousand people. Azerbaijani, Georgian, Armenian and other nationalities live in the Municipality.

Based on the official statistics (source: National Statistics Office of Georgia), the population of Rustavi and Marneuli Municipality are given in Table 5.4.2.1.

Table 5.4.2.1. Number of Population, Thousand People

	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018
Georgia	3,847.6	3,829.0	3,799.8	3,773.6	3,739.3	3,718.4	3,716.9	3,721.9	3,728.6	3,726.4	3,729.6
Kvemo Kartli	421.2	424.0	422.8	422.8	421.5	421.0	422.5	425.2	428.0	429.7	432.3
City of Rustavi	118.3	119.9	120.5	121.4	122.0	122.7	124.0	125.0	126.1	126.8	127.8
Marneuli Municipality	101.5	102.5	102.5	102.8	102.8	103.0	103.6	104.4	105.2	105.8	106.5

As per the age groups, Marneuli Municipality much differs from average indicators of Georgia. Young and average aged people are most in number. This may be the reason for higher birth rate in the area and less migration of the youth to other cities and towns.

The number of population in the settled areas adjacent to the project corridor is given in Table 5.4.2.2.

Table 5.4.2.2. Population of the villages adjoining the project corridor, thous. People

Village	Population, thous. people		
	As per 2002 census	As per 2014 census	As per 2002 census
Azizkendi	2170	1536	-634
Didi Mughanlo	1815	1286	-529
Kurtlaro	1711	1413	-298
Kvemo Kulari	628	565	-63
Kirikhlo	1262	1114	-148
Akhali Mamudlo	758	554	-204
Araflo	1118	854	-264
Kvemo Sarali	1745	1370	-375
Zemo Sarali	1135	883	-252
Akhlo Lalalo	805	690	-115
Damia-Giaurarkhi	1815	1939	124
Kirovka	706	663	-43
Sadakhlo	9486	7337	-2149

5.4.3 Economics

Kvemo Kartli Region has great potential for industrial development. Industrial center is Rustavi. There are 26 large plants in different branches and fields on the territory of the city, including the following large companies: JSC “Azoti”, JSC “Rustavi Metallurgical Plant”, JSC “Heidelberg Georgia”, JSC “Geosteel”, JSC “Jazbegi”, etc.

The branch structure of the economy of Maneuli Municipality is as follows: agriculture, industry, construction, transport trade and other branches.

The leading branches of economy in Marneuli Municipality are flour and bread and pastry production, dairy and cheese production, fruit and vegetable tinning, including meat mix, cutting and processing decorative stones, furniture manufacturing and processing sand carriers, etc.

Trade is well developed in the Municipality, with many retail and wholesale trade and service units.

5.4.4 Agriculture

The agricultural land fund of Marneuli Municipality was 57,052,59 ha, including: arable land - 22,271.29 ha; hay-making meadows- 1,724.98 ha; pastures - 30,945.8 ha; area occupied by perennial crops - 2,110.52 ha. The city of Marneuli and communities of Kapanakhchi, Algeti, Kachagani and Kasumlo use 6512 ha of Iagluja and Babakari pastures on the territory of Marneuli Municipality. 33,230 ha of agricultural land is privatized.

Common agricultural crops in the Municipality are: wheat, barley, maize, rye, sunflower; common vegetables are: potato, cabbage, carrot, onion, garlic, beans, cucumber, tomato, etc.

The climatic conditions in the region are extremely beneficial for agricultural production and make it possible to gain harvest two or three times a year.

Cattle-breeding is a well-developed branch in the Municipality, as well as poultry-raising.

The project road will mainly run across the agricultural plots, which are intensely cultivated. These areas are used as pastures.

5.4.5 Tourism, Historical-cultural monuments

Mostly, cultural-recognition tourism is developed in Marneuli Municipality. Agro-tourism is developed on the territories of Tamarisi and Kulari communities. Akhkerpi has a certain potential to become a resort. The Municipality has a perspective to develop horse and hunting tourism.

There are 34 historical-archeological monuments in Marneuli Municipality. An old Georgian architectural monument, Monastic Complex Khujabi (XIII c.) near village Akhkerpi is worth mentioning. A middle-century monastery Khojorni is also important. Tsopa Fortress is also worthwhile. It functioned in the VI-XIII centuries. The fortress is built on a cliffy mountain. There is a site of ancient village near Tsopa Fortress. Opreti Fortress near village Opreti is also worthwhile, which is first mentioned in the literary sources in the X century. The Tserakvi Monastic Complex near village Tserakvi is also notable.

No facts of historical-cultural monuments were identified in the corridor selected for the project road.

5.4.6 Infrastructure

The length of the central and local roads in Marneuli Municipality is 540 km, with 220 km of central roads and 320 km of local roads. 230 km of the roads is asphalted and 310 km is ground roads.

Marneuli Municipality are totally supplied with drinking water. The village people take the drinking water from springs and wells.

The audit of the project corridor and adjoining areas identified the following crossing points of the infrastructural communications with the project road:

- 10, 35 and 110 KW power lines;
- International, regional and local roads;
- Irrigation channels;
- Underground pipelines, etc. (See figures)

The objects immediately crossing the project corridor are listed in paragraph 4.10.6.

6. METHODS, APPROACHES AND EVALUATION CRITERIA USED TO ASSESS THE ENVIRONMENTAL IMPACT

6.1 Introduction

The principal goal of evaluation of the environmental impact is to identify the kind and value of the impact of the planned activity on physical, biological and social environment. This must become the basis for developing the relevant efficient mitigation measures. In order to achieve this aim it is necessary to identify the criteria so that one should be able to compare the results obtained through calculations and other methods to it. The comparison difference (quantitative change) allows identifying the value of the expected impact (scale, limits of propagation).

Following the requirements of the legislation of Georgia and characteristics of the planned activities, the following types of the environmental impact were considered:

- Impact on physical environment – the probability of the atmospheric air quality deterioration, noise and vibration propagation, risks of changing the qualitative state of water and soil environment, violation of the stability of the geological state, visual-landscape impact.
- Impact on biological environment – the generic and quantitative decrease of flora and tree-and-vegetation cover, disturbance of the animal world, deterioration of their habitats and probability of immediate impact.
- Changes in social-economic conditions of the urban zone under the impact, both positive and negative.
- Possible negative impact on historical and archeological monuments.

The evaluation criteria for the each of the above-listed impacts were identified by an individual approach, e.g.:

- The emissions and noise/vibration propagation in the atmospheric air were calculated based on the relevant methodic and normative documents. The expected changes in the design points were identified for the most unfavorable conditions. During the calculations, the background state in the pr area was taken into account. The gained results were compared to the normative documents effective in Georgia.
- The value of the impact on the qualitative state of water and soil environment was evaluated by considering the distance from the surface waters and specificity of the technological procedures used during the construction process
- The methods of visual-landscape assessment are based on the landscape value and existing situation of the action site;
- In evaluating the impact on the geological environment, the existing engineering-geological conditions and analysis of the measures necessary for the construction works are important.
- The approach used in evaluating the impact on the biological environment envisages the comparison of the background state and forecasted change resulting from the project implementation.

- In evaluation the impact on the social-economic environment, the attention was paid to various aspects, with the positive impact being most important.
- The method to evaluate the negative impact on the historical and archeological monuments envisages the identification of the probability of their damage or destruction by considering the specifics of their location.

All kinds of impacts were classified with a 3-point system, in particular:

1. *1. Significant (high) impact* needing high costs to take relevant mitigation measures, the mitigation measures are less efficient and/or the project/technological process need certain corrections. The probability of the population's dissatisfaction is high.
2. *Average impact* implying that in terms of the relevant mitigation measures, the impact can be brought to the admissible level.
3. *Insignificant (low) impact* when in terms of standard mitigation measures, the quantitative or qualitative change of the environment is not significant; no population's dissatisfaction is expected.

It should be noted that some kinds of impact are not expected and there is no need for mitigation measures.

In order to assess the values of some of the impacts, it is also important to assess the duration of impact and evaluate how swiftly a natural object can be restored either to its original state, or state nearly similar to the original one, after the sources of impact are eliminated.

The sub-chapters below give a more detailed description of the criteria used in the environmental impact assessment.

6.2 Assessment criteria of the impact on the atmospheric air quality

Kind of impact	Assessment criteria		
	<i>Significant (high) impact</i>	<i>Average impact</i>	<i>Significant (high) impact</i>
<u>Propagation of combustion products</u>	The MAC portion of the polluting substance concentrations in a 500 m zone and at the border of the populated area exceeds 1 and exceeds or almost equals 0,8 at other sensitive receptors (hospital, recreational zone, etc.). The impact is long or constant. Population's dissatisfaction is inevitable.	<u>Propagation of combustion products</u>	The MAC portion of the polluting substance concentrations in a 500 m zone and at the border of the populated area exceeds 1 and exceeds or almost equals 0,8 at other sensitive receptors (hospital, recreational zone, etc.). The impact is long or constant. Population's dissatisfaction is inevitable.
<u>Dust propagation</u>	The MAC portion of inorganic or organic dust in a 500 m zone and at the border of the populated area exceeds 1 and exceeds or almost equals 0,8 at other sensitive receptors (hospital, recreational zone, etc.). The impact is long. The population's dissatisfaction is inevitable.	<u>Dust propagation</u>	The MAC portion of inorganic or organic dust in a 500 m zone and at the border of the populated area exceeds 1 and exceeds or almost equals 0,8 at other sensitive receptors (hospital, recreational zone, etc.). The impact is long. The population's dissatisfaction is inevitable.
<u>Odor propagation</u>	Objectionable odor spreads towards the settled area and sensitive receptors (hospital, recreational zone, etc.) either constantly, or in the windy weather. Population's dissatisfaction is inevitable.	<u>Odor propagation</u>	Objectionable odor spreads towards the settled area and sensitive receptors (hospital, recreational zone, etc.) either constantly, or in the windy weather. Population's dissatisfaction is inevitable.
<u>Condition of the working area (combustion products, dust, odor)</u>	It is impossible to work. Using self-contained breathing apparatus or other protective equipment is inefficient.	<u>Condition of the working area (combustion products, dust, odor)</u>	It is impossible to work. Using self-contained breathing apparatus or other protective equipment is inefficient.

6.3 Noise and vibration propagation – Impact Assessment Criteria

Kind of impact	Assessment criteria		
	<i>Significant (high) impact</i>	<i>Average impact</i>	<i>Significant (high) impact</i>
<u>Noise propagation</u>	Noise levels at the border of the settled area exceed 55 DbA during the day and 45 dBA at night, or exceeds 50 dBA during the day and 40dBA at night at sensitive receptors. Excess noise levels are intense. Population's dissatisfaction is inevitable.	Noise levels at the border of the settled area little exceed 55 DbA during the day and 45 dBA at night; however, the impact is expected only in some cases or is temporal. The noise levels at the sensitive receptors are admissible; however, additional preventive measures are recommended.	The noise background levels have deteriorated a bit near the settled areas or sensitive receptors. In any case, no levels in excess of the admissible levels are expected. It is sufficient to take standard mitigation measures.
<u>Vibration</u>	Due to the use of heavy technique and other methods, vibration spreads to great distances. There is a probability of damage or destruction of buildings and premises, monuments of cultural heritage or disturbance of geological stability.	Vibration does not spread to far places, or the impact is short-term. The probability of damage of buildings and premises, monuments of cultural heritage or disturbance of geological stability is very little. Minor and periodic discomfort is expected.	Vibration propagates only in the working zone. No damage of buildings and premises, monuments of cultural heritage or disturbance of geological stability is expected. No additional mitigation measures are needed.
<u>Condition of the working area (noise and vibration)</u>	It is impossible to work. Using ear-plugs or other protective equipment is less inefficient. It is necessary to change the service staff frequently.	Noise and vibration is a nuisance in the working area; but working is possible provided the relevant protective equipment are used or other measures are taken (e.g. cutting the working hours and the like).	The noise and vibration levels in the working zone are not high. No PPE is needed, or if needed only for short periods. An 8-hour-long working day is permitted.

6.4 Assessment criteria of the expected impact on water

Kind of impact	Assessment criteria		
	<i>Significant (high) impact</i>	<i>Average impact</i>	<i>Significant (high) impact</i>
<u>Changed flow rate of the surface waters</u>	Under the project impact, the natural river flow rate is strongly changed (either for the year, or temporarily); it is difficult to maintain the present state of the water eco-system. Other water-consuming unit has a limited access to water, or due to the increased water flow, the risk of developing hazardous hydrological events has increased.	Under the project impact, the natural river flow rate reduced to 70%(either for the year, or temporarily); however, the water eco-system is mostly maintained. The access of another water-consuming unit to water has not changed, or Under the project impact, the natural river flow rate increased to 110%. The risks of developing the hazardous - hydrological events are possible to eliminate by using relevant protective measures.	Under the project impact, the natural river flow rate reduced to 70% (either for the year, or temporarily). The access of another water-consuming unit to water has not changed, or the unit is not used for other purposes. The river flow rate will not increase under the impact of the project.
<u>Deterioration of the surface water quality, origin of the sewage</u>	Fishing or drinking-and-industrial water object is under the impact, or Significant amount of sewage is expected. Despite building the treatment plant, there is a probability of discharging the excessively polluted waters, or the probability of emergencies is high. Due to the near location of the water body, there is a possibility for the solid remains and liquid mass to enter the water body.	An industrial-household water unit is under the impact. Sewage is originated; however, at the expense of relevant preventive measures (arranging the duly efficient treatment plant, etc.) it is possible to maintain the qualitative state of the surface water. The existing quality may be changed a bit what will have a minor impact on the water biodiversity, or the probability of emergencies to occur is not high. In such a case, the distances are so great that the risks of the polluting substances flowing into the water are minimal.	There are no surface waters near the water object. Therefore, there is only the possibility of indirect impact, which is not major. No sewage is expected to originate, or the small amounts of liquid remains can be managed by using the methods safe for the water environment (e.g. by an evaporating pond, recycling the liquid remains, etc.).
<u>Ground water pollution</u>	The activity implies using the methods creating the risks of excess pollution of the ground waters (e.g. burying the materials containing polluted substances, etc.);	The activity implies using the methods creating certain risks of pollution of the ground waters; however, using the mitigation measures is efficient and significantly reduce the risks,	The risks of the ground water pollution are associated with the unforeseen cases only (minor oil product leakages from technique or equipment and the like.). No large amounts of liquid polluting

	<p>mitigation measures are less efficient, or the probability of emergencies to occur is quite likely with the infiltration of the large amounts of oil products or other polluting substances into the ground layers.</p>	<p>or there is probability of emergencies to occur; however, relevant preventive measures are taken.</p>	<p>substances are stored or used in the area threatening the ground waters in case of accidents.</p>
<p><i>Impact on the flow rate of the ground waters, changed infiltration properties of the grounds</i></p>	<p>The activity envisages arranging deep engineering facilities, with which it is possible to cross the underground water-bearing infrastructure. As a result, the outflows of the underground waters may decrease, or The activity envisages using large land areas/cutting down the forests what will deteriorate the ground infiltration properties. This may reduce the intensity of the underground water alimentation with the atmospheric precipitations.</p>	<p>The activity does not envisage arranging deep engineering facilities, and in addition, there are no particularly significant water-bearing horizons spreading on the territory. Despite this, cultivation of land areas or the used building and exploitation methods may have a certain impact on the outflows of less valuable springs.</p>	<p>By considering the small project area, used building and exploitation methods and existing hydro-geological conditions, the impact on the flow rate of the underground waters will be minor. No impact on either drinking, or industrial water is expected.</p>

6.5 Assessment criteria of the expected impact on the soil

Kind of impact	Assessment criteria		
	<i>Significant (high) impact</i>	<i>Average impact</i>	<i>Significant (high) impact</i>
<u><i>Damage and erosion of the fertile soil layer</i></u>	<p>The project envisages using over 12,5 ha of agricultural plots or other land areas highly valuable in respect of fertility,</p> <p>or</p> <p>the methods used during the building and exploitation promote the activation of the soil erosion processes over significant areas.</p>	<p>The project envisages using less than 12,5 ha of agricultural plots or other land areas valuable in respect of fertility,</p> <p>or</p> <p>the area to manage is more than 12,5 ha, but this is not an agricultural land or is not otherwise valuable,</p> <p>or</p> <p>The methods used during the building and exploitation promote the activation of the soil erosion processes in some areas, but they can be prevented by using the relevant mitigation measures.</p>	<p>The project envisages using less than 12,5 ha of non-agricultural plots or other land areas less valuable in respect of fertility. Provided the fertile soils layer is duly managed, the impact will be minimal. No erosion beyond the used perimeter is expected.</p>
<u><i>Soil/ground pollution</i></u>	<p>Due to the methods used during the building and exploitation, the risks of polluting the fertile layer of the agricultural land of any area (exceeding MAC) are quite high or virtually inevitable</p> <p>or</p> <p>the probability of developing such emergencies leading to the pollution of over 100 m² area or over the depth of 0,3 m of soil and ground is quite high.</p>	<p>Due to the methods used during the building and exploitation, there are risks of polluting the less valuable surface layer of lands (exceeding MAC)</p> <p>or</p> <p>there is a probability of developing such emergencies leading to the pollution of less than 100 m² area or less than the depth of 0,3 m of soil and ground.</p>	<p>Only minor local pollution of soil/ground is expected, mostly in unforeseen cases. The technology of local cleaning the polluted soil can be used.</p>

6.6 Assessment criteria of the expected impact on the geological environment

Kind of impact	Assessment criteria		
	<i>Significant (high) impact</i>	<i>Average impact</i>	<i>Significant (high) impact</i>
<u>Violation of the stability of the geological environment under the project impact. activation of hazardous processes</u>	The project is planned to implement in the relief with the III degree of complexity in engineering-geological respect. During the earthworks, the probability of activation of such hazardous geodynamic processes, as landslide, rock fall, mudflow, etc. exists, or the risks of activation of the same processes exist in the operation phase of the object (hydrotechnical facilities, tunnels, etc. can be considered as such object). It is necessary to build the protective facilities of complex structures or to make corrections to the project.	The project is planned to implement in the relief with the II degree of complexity in engineering-geological respect. During the earthworks or in the operating phase, the probability of activation of hazardous geodynamic processes. However, provided the protective measures in terms of simple-structure facilities these can be prevented.	The project is planned to implement in the favorable relief. No significant resources to build protective structures are needed. Only local, minor erosive processes may develop.
<u>Impact of the existing engineering-geological conditions on the project facilities</u>	The engineering-geological properties of the grounds are not favorable needing building deep foundations to establish the facilities on the cliffy rocks, or hazardous geodynamic processes threaten the stability of the object. It is necessary to build the protective facilities of complex structures or to make certain corrections to the project.	The engineering-geological properties of the grounds allow founding the object, but under certain conditions. The degree of the environment (ground and ground waters) aggressiveness to the reinforced concrete is satisfactory, or hazardous geo-dynamic processes pose a certain threat to the object's stability; however, the risk may be eliminated by taking protective measures of a simple structure.	The object is not a facility of a complex structure. The engineering-geological properties of the territory-constituent grounds are satisfactory. Consequently, there is no need for either deep foundations, or significant measures to protect the engineering facilities.

6.7 Assessment criteria of the expected impact on the biological environment

Kind of impact	Assessment criteria		
	<i>Significant (high) impact</i>	<i>Average impact</i>	<i>Significant (high) impact</i>
<i>Generic and quantitative changes in the vegetation cover</i>	<p>The project implementation will lead to the destroy of the endemic or Red-Listed species</p> <p>or</p> <p>the project implementation will lead to the use of the forested area over 1 ha</p> <p>or</p> <p>there is a risk for invasive kinds to spread</p>	<p>Following the project implementation, the risks of direct or indirect impacts on the endemic or Red-Listed species are minimal</p> <p>or</p> <p>the project implementation will lead to the use of the forested area less than 1 ha</p>	<p>Following the project implementation, there is no risk of impact on the endemic or Red-Listed species. Only the destruction of the homogenous low-value vegetation cover is expected. There is no risk for invasive species to spread.</p>
<i>Deterioration of the animal habitats, habitat loss or fragmentation</i>	<p>The project implementation will lead to the destroy, reduction or fragmentation of the area of the endemic and Red-Listed animal species</p> <p>or</p> <p>certain species may be reduced or certain population may disappear in the project implementation area</p> <p>or</p> <p>the object is a linear object creating a kind of barrier for migrating animals</p> <p>or</p> <p>there is a risk for invasive kinds to spread.</p>	<p>Following the project implementation, the impact on the endemic or Red-Listed species is less likely. The area of such living organisms with no ability to migrate to long distances may decrease,</p> <p>or</p> <p>quantitative changes of certain species are expected in the project implementation area, but their destroy is not likely.</p>	<p>The project area is under the anthropogenic impact and is not a shelter for animal species. Only the animals adapted to the human activity live in the area with high ecological valency. The object is not a barrier hampering the migrating animals.</p>
<i>Immediate impact on fauna species</i>	<p>Due to the project implementation, there are some cases of animal perish (including endemic or Red-Listed species) during the year,</p> <p>or</p> <p>increased probability of poaching.</p>	<p>Due to the project implementation, there are few cases of animal perish (less valuable species) during the year</p>	<p>Perish of the animal species is less likely. The impact is short-term. The probability of increased poaching is minimal.</p>

<u>Direct or indirect impacts on the protected areas</u>	Due to small distance and following the methods used at the building and exploitation stages, there are risks of long-term direct or indirect impacts on the territory.	Following the methods used at the building and exploitation stages, there is a risk of indirect impact on the protected area, but the impact is not long.	Due to a great distance, an impact on the protected area is less likely.
--	---	---	--

6.8 Assessment criteria of the expected impact on the visual-landscape environment

Kind of impact	Assessment criteria		
	<u>Significant (high) impact</u>	<u>Average impact</u>	<u>Significant (high) impact</u>
<u>Landscape impact</u>	The project implementation is planned within the limits of the rare and high-value landscapes, or the landscape and its components are in fact intact and have high degree of naturalness.	The project implementation is planned within the limits of a regional or local landscape or the landscape and its components are partially transformed due to the human actions. They have an average degree of naturalness.	The project implementation is planned within the limits of a low-value landscape, which can be substituted, or the landscape and its components are quite devastated due to the man's economic activity.
<u>Visual changes</u>	The project area is easily seen from many locations. Implementation of the activity will have a significant impact on the visual effect for the local people or tourists.	The project area is seen from some observation points having no touristic value.	The project area is almost invisible. The building and exploitation will have a minimal impact on the visual effect for the local people or tourists.

6.9 Social Impact Assessment Criteria

Kind of impact	Assessment criteria		
	<i>Significant (high) impact</i>	<i>Average impact</i>	<i>Significant (high) impact</i>
	<i>Positive impact</i>		
<i>Increased budgetary flows</i>	Increased central budgetary flows	<i>Increased budgetary flows</i>	Increased central budgetary flows
<i>Employment and growing income of the population</i>	<p>The possibility to hire 70% of workforce from local population</p> <p>or</p> <p>The possibility to hire 40% of workforce from local rural residents</p> <p>or</p> <p>the possibility to hire 20% of workforce from local population in the high-mountain villages.</p>	<p>A total of 30 to 100 people employment opportunities.</p> <p>or</p> <p>Local villagers from 10 to 30 people employment opportunities.</p> <p>or</p> <p>Highland status of rural residents few employment opportunities.</p>	10 persons employment opportunity.
<i>Improvement of transport infrastructure</i>	Improvement of the technical state of the international, state and regional roads, high probability of distress of transport intensity.	Improvement of the technical state of the roads in some or high-mountainous village and easy transportation.	Simplified rehabilitation of rural roads and transportation
<i>Other social-economic benefit</i>	<p>At a country, regional or municipal level, or for several high-mountainous villages:</p> <ul style="list-style-type: none"> • Improved waste management conditions. • Improved water-supply and water-drainage conditions. • Improved power supply and gas supply conditions. • Improved accessibility to other kinds of resources. 	<p>For several or high-mountainous villages:</p> <ul style="list-style-type: none"> • Improved waste management conditions. • Improved water-supply and water-drainage conditions. • Improved power supply and gas supply conditions. • Improved accessibility to other kinds of resources. 	Only some families (homesteads) receive various social-economic benefits.

Negative impact			
<i>Resettlement, need to use private property</i>	One of several cases of physical resettlement, or over 10 cases of economic resettlement, or one or several cases of economic resettlement in a high-mountainous village	Up to 10 cases of economic resettlement. Provided the compensation measures are taken, no population's dissatisfaction is expected	No physical or economic resettlement is expected. Temporal use of the privately owned land plots and units may be needed, with the relevant compensation measures planned.
<i>Deterioration of transport infrastructure</i>	Deterioration of the technical condition of the international, state and regional roads, significant increase of transport intensity.	Deterioration of the technical condition of the roads in some or high-mountainous villages or significant increase in vehicle movement; however, the impact is temporal.	No deterioration of local roads or significant increase of transport intensity is not expected.
<i>Other negative social-economic effects</i>	At a country, regional or municipal level, or for several high-mountainous villages: <ul style="list-style-type: none"> • Deteriorated waste management conditions and landfill overload. • Deteriorated water-supply and water-drainage conditions or overloaded relevant systems • Limited accessibility to other resources. 	For several or high-mountainous villages: <ul style="list-style-type: none"> • Deteriorated waste management conditions and landfill overload. • Deteriorated water-supply and water-drainage conditions or overloaded relevant systems • Limited accessibility to other resources. 	For several families <ul style="list-style-type: none"> • Deteriorated waste management conditions and landfill overload. • Deteriorated water-supply and water-drainage conditions or overloaded relevant systems • Limited accessibility to other resources. <p>However, the problem can be solved by searching alternative routes.</p>

6.10 Assessment criteria of the expected impact on the historical-cultural monuments

Kind of impact	Assessment criteria		
	<i>Significant (high) impact</i>	<i>Average impact</i>	<i>Significant (high) impact</i>
<u><i>Damage to the historical-cultural monuments</i></u>	Due to the small distance and following the methods used in the building and exploitation phases, there is a probability of damaging the monuments of the international or local historical-cultural heritage.	Due to the small distance and following the methods used in the building and exploitation phases, there is a probability of damaging the monuments of the local historical-cultural heritage.	Due to the great distance, the probability of damaging the monuments of historical-cultural heritage is less likely.
<u><i>Unforeseen damage to the archeological monuments</i></u>	Following the historical designation of the project area, there is a probability of the late identification of the archeological monuments.		The area is quite anthropogenic. Therefore, identification of the recent archeological monuments is less likely.

7. DESCRIPTION OF THE PROJECT ENVIRONMENTAL IMPACT AND ASSESSING THE IMPACT VALUE

The environmental impact is assessed for two project phases: construction and operation phases of the highway. The environmental impact assessment is done based on the principal data given above. In particular, the following aspects were taken into account:

- Project specifics, engineering solutions and technological approaches used during the construction and operation processes;
- The existing state of the natural and social environment of the corridor selected for the planned activity;
- Criteria developed in advance to assess the expected impact on each environmental object.

The following types of environmental impacts of the project implementation were considered:

:

Expected impact	Design phase		Construction phase		Exploitation phase		Design phase	
• Emission of harmful substances in the atmosphere			⊕		⊕			
• Noise and vibration			⊕		⊕			
• Impact on geological environment			⊕					
• Risks of impact on water environment			⊕		⊕			
• Risks of impact on soil, pollution risks			⊕		⊕			
Impact on the vegetation cover and animal species			⊕		⊕			
• Visual-landscape changes			⊕		⊕			
• Impact on the social-economic environment			⊕		⊕			
• Risks of impact on the historical and archeological monuments			⊕					
• Transboundary impacts			⊕		⊕			
• Cumulative impact			⊕		⊕			

Below, we give a brief description of each kind of impact. The maps in Annex 2 give the general information about spatial nature of each kind of impact. Maps show the areas relatively sensitive to the impact in the construction and exploitation phases.

7.1 Impact on atmospheric air quality – emissions in the construction and operation phases

7.1.1 Construction Phase

The risk of atmospheric air pollution in the construction phase is mainly the stationary air polluting sources provided on the construction camp, such as concrete plant, storage areas of inert materials, fuel reservoirs, etc.

Deterioration of the air quality is also expected during the earthworks in the project area and in the areas adjacent to it, as well as from transport traffic, their exhaust fumes and dusting of the non-faced roads.

Consequently, the number of the sources of emission (emissions of harmful substances) in the atmospheric air was calculated. It should also be noted that the operation of a crushing and storing plant is not planned on the territory of the construction camp. However, the emission calculation given below considers the operation of such a plant, too.

As for the emissions and noise caused by the vehicle movement, earthworks and construction works, the sites located near the residential areas are noteworthy. It should be noted that the relief of the section running near the residential area does not need large volumes of earthworks or demolition works to use.

7.1.1.1 Quantitative calculations of the emission (emissions of harmful substances) in the atmospheric air for the construction camp

Concrete plant is an assembly-type stationary structure. The facility includes: batching plant, inert material supply system, pneumatic system, automatic control system and operator's cabin.

- Batching plant consists of cranes, transporter and band conveyers, which provides automatic supply of inert material.
- Inert material dosing system consists of collecting tank and automatic batcher. The batcher is equipped with precise dosage and delivery system which provides automatic adjustment of the concrete mass.
- Water and admixture (in liquid phase) supply system includes balancing chamber which ensures precise dilution. The system is equipped with anticorrosion pump equipment.

The control system is automatic. It has a modern computer controller, which ensures automatic control during the concrete production process as well as automatic water level adjustment.

Concrete loading (equipped with a fabric filter) into the silo, transporting and production of concrete mass will be conducted in the hermetic environment what will reduce air pollution.

Concrete plants (concrete units) do not cause much air pollution, since after mixing naturally wet materials and cement, the technological process is accomplished by using wet method.

The following technological processes and equipment are the source of ambient air pollution:

Cement silos (G-1), road building transport parking area (G-2), diesel reservoir (G-3), crushing and sorting complex (G-4), band conveyors (G-5), supplying, storage and warehousing inert materials (G-6) and warehousing and storing fractioned gravel (G-7).

The actual moisture of gravel varies from 9 to 10 %, and that of sand is >10%.

Plant will be equipped with two cement silos with 100 t total capacity (with relevant filters); open storages for sand and gravel (300 m² each). The total length of the band conveyors will be 10m; and their width will be 1,0 m.

The emission is calculated for the maximum values of materials. Concrete formula (to produce 1 m³ of concrete) is as follows: sand – 650 kg, gravel – 1100 kg, cement – 420 kg.

Maximum nominal capacity of the batching plant is 60 m³/h. Maximum possible capacity for one-shift

work and per annum (150 days of work) is $60 \text{ m}^3/\text{h} * 8\text{hr}/\text{day} * 150 \text{ day}/\text{year} = 54,0$ thousand m^3/year .

The cement will be supplied immediately from the selected supplier. The inert materials will be supplied from the licensed quarries. The maximum expenditure of the materials is calculated based on the annual output:

$$\text{Sand} - 0,65\text{t} * 60 \text{ m}^3/\text{hr} * 900 \text{ hr}/\text{year} = 35,1 \text{ thous. t}/\text{year}.$$

(Following the technological process, the sand humidity is more than 3%. Thus, emission will not be calculated as per [5]. Gravel: $1,10 \text{ t} * 60\text{m}^3/\text{hr} * 900 \text{ hr}/\text{year} = 59,4$ thous. t/year [66 t/hr]

$$\text{Cement} - 0,420\text{t} * 60 \text{ m}^3/\text{hr} * 900 \text{ hr}/\text{year} = 22,68 \text{ thous. t}/\text{year} [25,2 \text{ t}/\text{hr}]$$

Proper equipment will be installed at the plant to receive these products and the proper engineering infrastructure will be provided.

According to the basic typical flow chart, the inert materials supplied with vehicles will be stored at relevant storehouses (with sand and gravel separately). The auto-loader will transport gravel and sand to the hoppers (4 hoppers sizes $3 \times 3 \text{ m}$) through the ramp. Then, it will be supplied to the concrete unit via the band conveyor and batcher. At the same time, the computer system doses the right proportions of the ingredients (sand, gravel, cement) by considering the needed grade of concrete production and will send it to the mixing aggregate. An hourly design capacity is $60 \text{ m}^3/\text{hr}$. The ready concrete will be transported with concrete haulers to the end consumer.

Emission calculation from the cement silo (G-1)

The technological process of concrete production implies loading the cement into a silo from the cement truck by using a pneumatic method and its dosed supply by using a worm-and-peg method through the scales and directly into the mixer, where sand, grit, water and chemical additive (plasticizer) components are added in advance in line with the receipt.

As per the plant data, 54,0 thousand tons of cement must be supplied to a silo a year. The silo is equipped with a standard fabric filter, with a stated efficiency of 99,8% (a small sleeved fabric filter, grade KΦE-C, so called "silo filter" is destined for the aspiration of excess pressure of the silos. Regeneration with compressed air. The filtered dust returns to the silo. The filter length is 200 m. The air consumption range is $300\text{-}1000\text{m}^3/\text{h}$. The filtration area is $5\text{-}200\text{m}^2$.

As per [3], the annual emission of cement dust will be $54\,000 \text{ t} * 0,8\text{kg}/\text{t} * 10^{-3} = 43,2 \text{ t}/\text{year}$; The emission, by considering the stated efficiency of the fabric filter will be:

$$43,2 \text{ t}/\text{kg} * (1 - 0,998) = 0,0864 \text{ t}/\text{year}.$$

Calculation of a per-second emission of maximum single emission (g/sec):

Average load-carrying capacity of one cement truck is 30 t, the time of unloading is 1 hr (3600 sec); per-second emission of cement dust will be: $30\text{t} * 0,8\text{kg}/\text{t} * 10^3 / 3600\text{sec} = 6,667 \text{ g}/\text{sec}$;

By considering the efficiency of the fabric filter, we obtain: $6,667 \text{ g}/\text{sec} * (1 - 0,998) = 0,014 \text{ g}/\text{sec}$.

The concrete mixer itself is a system closed from all sides and having no contact with the atmospheric air. Consequently, no dust is emitted into the atmospheric air.

(The elastic pipe installed on the concrete mixer is connected to the upper bunker and the dust originated during the materials loading, is directed backwards).

Table 7.1.1.1.1 Calculated emission

Code	Description of substance	%	Mass (gr/sec)	Mass (t/year)
2908	Inorganic (cement) dust	10 0	0,014	0,0864

Calculation of emission from the parking area of road-building machines (G-2)

Excavator, 3 pcs.

The sources of emission of polluting substances are road-building machine engines at engine launching, heating, movement across the area and idling.

The calculations are made in line with methodical guidelines [7]

The quantitative and qualitative properties of the pollutant emission from the road-building machines are given in Table 7.1.1.1.2.

Table 7.1.1.1.2. Quantitative and qualitative properties of emisison of polluting substances from the road-building machines parking area

Pollutant		Max. emission, gr/sec	Annual emission, t/year
Code	Description		
301	Nitrogen dioxide (Nitrogen (IV) oxide)	0.01212	0.0198
304	Nitrogen (II) oxide	0.001969	0.0032166
328	Soot	0.0017	0.002745
330	Sulphur dioxide	0.001515 8	0.0022193
337	Carbon oxide	0.02045	0.02421
2732	Hydrogen oil fraction	0.0039	0.005445

The calculation is accomplished for the emissions from the road-building machines parking area at the environmental temperature. The driving distance of the road-building machines when leaving the parking area is 0,1 km and it is -0,1 km when entering the parking area. The duration of the engine operation when idling in case of leaving the parking area is 0 minute and it is 0 minute in case of returning to the parking area.

The source data to calculate the emission of polluting substances are given in Table 7.1.1.1.3.

Table. 7.1.1.1.3. Source calculation data

Machine name	Type of machine	Maximum number of machines				Electrical starter	Simultaneity
		Total	Leave/entry	Leave in 1 hour	Entry in in 1 hour		
	excavator with capacity 61-100 kV (83-136 hp)	3	3	3	0	10	+

The accepted legend, calculation formulae and calculation parameters and their substantiation are given below:

The emission of the i^{th} substance from one unit of a k^{th} type when leaving the territory $M'ik$ and at returning to territory $M''ik$ a day is calculated by formulae:

$$M1ik = mIPik \cdot tIP + mL ik \cdot L1 + mXXik \cdot tXX1, gr$$

$$M2ik = mL ik \cdot L2 + mXXik \cdot tXX2, gr$$

Where:

m_{IPik} – is the specific emission of the i^{th} substance during the heating of the vehicle engine of a k^{th} type, g/min.

$m_{L ik}$ – is the specific emission of the i^{th} substance during the driving of the vehicle of a k^{th} type with the speed of 10-12 km/h, g/km.

m_{XXik} – is the specific emission of the i^{th} substance during the idling of the vehicle of a k^{th} type, g/min.

t_{IP} – is the time of launching engine or engine heating, min.

$L1, L2$ – is the heating regime of the vehicle on the territory of the parking area, km;

t_{XX1}, t_{XX2} – is the engine idling at leaving or returning to the territory of the parking area, min;

Total emission of the i^{th} substance from the oadc building machines for each period of the year is calculated with an individual formula:

$$M_i = \sum_{k=1}^j (M'_{ik} + M''_{ik}) \cdot N_k \cdot DP \cdot 10^{-6}, \text{ t/year};$$

Where:

N_k – is the number of vehicles of a k^{th} type working every day;

DP – is the number of working days in the design period (warm, transient, cold).

j – is the period of a year (T- Warm, II- Transient, X-Cold).

M_i total annual emission of et same substances are summarized in different seasons of the year:

$$M_i = M^T_i + M^{\text{II}}_i + M^X_i, \text{ t/year};$$

Total single emission of the k -th substance G_i is calculated by formula:

$$G_i = \sum_{k=1}^j (M'_{ik} \cdot N'_k + M''_{ik} \cdot N''_k) / 3600, \text{ gr/sec};$$

Where;

N'_k, N''_k – is the number of vehicles of a k^{th} type leaving and entering the parking area in 1 hour and is characterized by maximum intensity of the vehicles leave/entry;

Out of the obtained values of G_i , the maximum single emission (g/sec) by considering the simultaneity of movement of vehicles of different groups will be selected.

Specific emission of polluting substances i during the launching engine heating and engine heating, movement or idling are given in Table 7.1.1.1.4.

Table 7.1.1.1.4. Specific emissions of pollutants, gr/min

Type	Pollutant	Launch	Heating the engine			Driving			Idlin g
			T	II	X	T	II	X	
Excavator with capacity 61-100 kW (83-136 hp)									
	Nitrogen dioxide (Nitrogen (IV) oxide)	1,36	0,384	0,576	0,576	1,976	1,976	1,976	0,384
	Nitrogen (II) oxide	0,221	0,0624	0,0936	0,0936	0,321	0,321	0,321	0,0624
	Soot	-	0,06	0,324	0,36	0,27	0,369	0,41	0,06
	Sulphur dioxide	0,042	0,097	0,108	0,12	0,19	0,207	0,23	0,097
	Carbon oxide	25	2,4	4,32	4,8	1,29	1,413	1,57	2,4
	Hydrogen oil fraction	-	0,3	0,702	0,78	0,43	0,459	0,51	0,3

Engine heating regime is not considered in the calculations. The maximum single and annual emissions of polluting substances are calculated below:

$$M'_{301} = 0,384 \cdot 2 + 1,976 \cdot 1 / 10 \cdot 60 + 0,384 \cdot 5 = 14,544 \text{ gr};$$

$$M''_{301} = 1,976 \cdot 1 / 10 \cdot 60 = 11,856 \text{ gr};$$

$$M_{301} = (14,544 + 11,856) \cdot 250 \cdot 3 \cdot 10^{-6} = 0,0198 \text{ t/year};$$

$$G_{301} = (14,544 \cdot 3 + 11,856 \cdot 0) / 3600 = 0,01212 \text{ gr/sec}.$$

$$M'304 = 0,0624 \cdot 2 + 0,321 \cdot 1 / 10 \cdot 60 + 0,0624 \cdot 5 = 2,3628 \text{ gr};$$

$$M''304 = 0,321 \cdot 1 / 10 \cdot 60 = 1,926 \text{ gr};$$

$$M304 = (2,3628 + 1,926) \cdot 250 \cdot 3 \cdot 10^{-6} = 0,0032166 \text{ t/year};$$

$$G^{-304} = (2,3628 \cdot 3 + 1,926 \cdot 0) / 3600 = 0,001969 \text{ gr/sec.}$$

$$M'328 = 0,06 \cdot 2 + 0,27 \cdot 1 / 10 \cdot 60 + 0,06 \cdot 5 = 2,04 \text{ gr};$$

$$M''328 = 0,27 \cdot 1 / 10 \cdot 60 = 1,62 \text{ gr};$$

$$M328 = (2,04 + 1,62) \cdot 250 \cdot 3 \cdot 10^{-6} = 0,002745 \text{ t/year};$$

$$G^{-328} = (2,04 \cdot 3 + 1,62 \cdot 0) / 3600 = 0,0017 \text{ gr/sec.}$$

$$M'330 = 0,097 \cdot 2 + 0,19 \cdot 1 / 10 \cdot 60 + 0,097 \cdot 5 = 1,819 \text{ gr};$$

$$M''330 = 0,19 \cdot 1 / 10 \cdot 60 = 1,14 \text{ gr};$$

$$M330 = (1,819 + 1,14) \cdot 250 \cdot 3 \cdot 10^{-6} = 0,0022193 \text{ t/year};$$

$$G^{-330} = (1,819 \cdot 3 + 1,14 \cdot 0) / 3600 = 0,0015158 \text{ gr/sec.}$$

$$M'337 = 2,4 \cdot 2 + 1,29 \cdot 1 / 10 \cdot 60 + 2,4 \cdot 5 = 24,54 \text{ gr};$$

$$M''337 = 1,29 \cdot 1 / 10 \cdot 60 = 7,74 \text{ gr};$$

$$M337 = (24,54 + 7,74) \cdot 250 \cdot 3 \cdot 10^{-6} = 0,02421 \text{ t/year};$$

$$G^{-337} = (24,54 \cdot 3 + 7,74 \cdot 0) / 3600 = 0,02045 \text{ gr/sec.}$$

$$M'2732 = 0,3 \cdot 2 + 0,43 \cdot 1 / 10 \cdot 60 + 0,3 \cdot 5 = 4,68 \text{ gr};$$

$$M''2732 = 0,43 \cdot 1 / 10 \cdot 60 = 2,58 \text{ gr};$$

$$M2732 = (4,68 + 2,58) \cdot 250 \cdot 3 \cdot 10^{-6} = 0,005445 \text{ t/year};$$

$$G^{-2732} = (4,68 \cdot 3 + 2,58 \cdot 0) / 3600 = 0,0039 \text{ gr/sec.}$$

Trucks, 5 pcs.

The sources of emission of polluting substances are road-building machine engines at engine launching, heating, movement across the area and idling.

The calculations are made in line with the following methodical guidelines [7]

The quantitative and qualitative properties of the pollutant emission from the road-building machines are given in Table 7.1.1.1.5.

Table 7.1.1.1.5. Quantitative and qualitative properties of the pollutant emission from the road-building machines parking area

Pollutant		Max. emission, gr/sec	Annual emission, t/year
Code	Description		
301	Nitrogen dioxide (Nitrogen (IV) oxide)	0,0098889	0,0124
304	Nitrogen (II) oxide	0,0016069	0,002015
328	Soot	0,0007222	0,0009625
330	Sulphur dioxide	0,00175	0,0021375
337	Carbon oxide	0,0420833	0,04425
2732	Hydrogen oil fraction	0,0057917	0,0063375

The calculation is accomplished for the emissions from the road-building machines parking area at the environmental temperature. The driving distance of the road-building machines when leaving the parking area is 0,1 km and it is -0,1 km when entering the parking area. The duration of the engine operation when idling in case of leaving the parking area is 0 minute and it is 0 minute in case of returning to the parking area. The number of working days is 250, including 250 transient days.

The source data to calculate the emission of polluting substances are given in Table 7.1.1.1.6.

Table. 7.1.1.1.6. Source calculation data

Machine name	Type of machine	Maximum number of machines				Electrical starter	Simultaneity
		Total	Leave/entry	Leave in 1 hour	Entry in 1 hour		
	Truck with capacity of from 5 to 8 tons	5	5	5	0	-	-

The accepted legend, calculation formulas, design parameters and their substantiation are given below:

The emission of the i^{th} substance from one unit of a k^{th} type when leaving the territory M'_{ik} and at returning to territory M''_{ik} a day is calculated by formulae:

$$M'_{ik} = m_{\Pi ik} \cdot t_{\Pi} + m_{\Pi P ik} \cdot t_{\Pi P} + m_{DB ik} \cdot t_{DB 1} + m_{XX ik} \cdot t_{XX 1}, \text{ gr}$$

$$M''_{ik} = m_{DB ik} \cdot t_{DB 2} + m_{XX ik} \cdot t_{XX 2}, \text{ gr}$$

Where:

$m_{\Pi ik}$ – is the emission of the i^{th} substance from the driving engine, gr/min;

$m_{\Pi P ik}$ – is the emission of the i^{th} substance from the driving engine during heading for k^{th} group, gr/min;

$m_{DB ik}$ – is the emission of the i^{th} substance during the vehicle driving conventionally with a permanent speed for k^{th} group, gr/min;

$m_{XX ik}$ – is the emission of the i^{th} substance during the idling of the vehicle of a k^{th} type, g/min;

t_{Π} , $t_{\Pi P}$ – is the time of launching engine or engine heating, min;

$t_{DB 1}$, $t_{DB 2}$ – is the machine time at leaving or returning to the territory calculated by the ratio of the average driving speed and driven distance, min;

$t_{XX 1}$, $t_{XX 2}$ – is the machine engine operation time at idling at leaving or returning to the territory, min.

When accomplishing the ecological control, the specific emission of vehicles reduces. Therefore, the emission values must be calculated by formula;

$$m'_{\Pi P ik} = m_{\Pi P ik} \cdot K_i, \text{ gr/min. } m''_{XX ik} = m_{XX ik} \cdot K_i, \text{ gr/min.}$$

Where:

K_i – is the coefficient, considering the reduction of the i^{th} polluting substance during the ecological control.

When calculating emissions from the road construction machine equipped with an electric drive starter, $m_{\Pi ik} \cdot t_{\Pi}$ member of the formula is not taken into account.

The total emission of the i^{th} polluting substance is calculated for each individual year by formula:

$$M_i = \sum_{k=1}^k (M'_{ik} + M''_{ik}) \cdot N_k \cdot DP \cdot 10^{-6}, \text{ t/year;}$$

Where:

N_k – is the number of vehicles of a k^{th} type working every day;

DP – is the number of working days in the design period (warm, transient, cold).

j – is the period of a year (T- Warm, II- Transient, X-Cold).

M_i total annual emission of the same substances are summarized in different seasons of the year

$$M_i = M^T_i + M^{\Pi}_i + M^X_i, \text{ t/year;}$$

Maximum single emission of the k -th substance G_i is calculated by formula:

$$G_i = \sum_{k=1}^k (M'_{ik} \cdot N'_k + M''_{ik} \cdot N''_k) / 3600, \text{ gr/sec;}$$

Where:

N'_k , N''_k – s the number of vehicles of a k^{th} type leaving and entering the parking area in 1 hour and is characterized by maximum intensity of the vehicles leave/entry;

Out of the obtained values of G_i , the maximum single emission (g/sec) by considering the simultaneity of movement of vehicles of different groups will be selected.

Specific emission of polluting substances i during the launching engine heating and engine heating, movement or idling are given in Table 7.1.1.1.7.

Table 7.1.1.1.7. Specific emissions of pollutants, gr/min

Type	Pollutant	Launch	Heating the engine			Driving			Idling	Ecological control, K_1
			T	II	X	T	II	X		
Truck with 5-8 t capacity										
	Nitrogen dioxide (Nitrogen (IV) oxide)	-	0,48	0,64	0,64	2,8	2,8	2,8	0,48	1
	Nitrogen (II) oxide	-	0,078	0,104	0,104	0,455	0,455	0,455	0,078	1
	Soot	-	0,03	0,108	0,12	0,25	0,315	0,35	0,03	0,8
	Sulphur dioxide	-	0,09	0,0972	0,108	0,45	0,504	0,56	0,09	0,95
	Carbon oxide	-	2,8	3,96	4,4	5,1	5,58	6,2	2,8	0,9
	Hydrogens oil fraction	-	0,38	0,72	0,8	0,9	0,99	1,1	0,35	0,9

Engine heating regime is not considered in the calculations.

The calculations of the annual and maximum pollutant emissions are given below;

$$M1 = 0,48 \cdot 4 + 2,8 \cdot 1 + 0,48 \cdot 5 = 7,12 \text{ gr};$$

$$M2 = 2,8 \cdot 1 = 2,8 \text{ gr};$$

$$M301 = (7,12 + 2,8) \cdot 250 \cdot 5 \cdot 10^{-6} = 0,0124 \text{ t/year};$$

$$G301 = (7,12 \cdot 5 + 2,8 \cdot 0) / 3600 = 0,0098889 \text{ gr/sec.}$$

$$M1 = 0,078 \cdot 4 + 0,455 \cdot 1 + 0,078 \cdot 5 = 1,157 \text{ gr};$$

$$M2 = 0,455 \cdot 1 = 0,455 \text{ gr};$$

$$M304 = (1,157 + 0,455) \cdot 250 \cdot 5 \cdot 10^{-6} = 0,002015 \text{ t/year};$$

$$G304 = (1,157 \cdot 5 + 0,455 \cdot 0) / 3600 = 0,0016069 \text{ gr/sec.}$$

$$M1 = 0,03 \cdot 4 + 0,25 \cdot 1 + 0,03 \cdot 5 = 0,52 \text{ gr};$$

$$M2 = 0,25 \cdot 1 = 0,25 \text{ gr};$$

$$M328 = (0,52 + 0,25) \cdot 250 \cdot 5 \cdot 10^{-6} = 0,0009625 \text{ t/year};$$

$$G328 = (0,52 \cdot 5 + 0,25 \cdot 0) / 3600 = 0,0007222 \text{ gr/sec.}$$

$$M1 = 0,09 \cdot 4 + 0,45 \cdot 1 + 0,09 \cdot 5 = 1,26 \text{ gr};$$

$$M2 = 0,45 \cdot 1 = 0,45 \text{ gr};$$

$$M330 = (1,26 + 0,45) \cdot 250 \cdot 5 \cdot 10^{-6} = 0,0021375 \text{ t/year};$$

$$G330 = (1,26 \cdot 5 + 0,45 \cdot 0) / 3600 = 0,00175 \text{ gr/sec.}$$

$$M1 = 2,8 \cdot 4 + 5,1 \cdot 1 + 2,8 \cdot 5 = 30,3 \text{ gr};$$

$$M2 = 5,1 \cdot 1 = 5,1 \text{ gr};$$

$$M337 = (30,3 + 5,1) \cdot 250 \cdot 5 \cdot 10^{-6} = 0,04425 \text{ t/year};$$

$$G337 = (30,3 \cdot 5 + 5,1 \cdot 0) / 3600 = 0,0420833 \text{ gr/sec.}$$

$$M1 = 0,38 \cdot 4 + 0,9 \cdot 1 + 0,35 \cdot 5 = 4,17 \text{ gr};$$

$$M2 = 0,9 \cdot 1 = 0,9 \text{ gr};$$

$$M2732 = (4,17 + 0,9) \cdot 250 \cdot 5 \cdot 10^{-6} = 0,0063375 \text{ t/year};$$

$$G2732 = (4,17 \cdot 5 + 0,9 \cdot 0) / 3600 = 0,0057917 \text{ gr/sec.}$$

Total emissions from the parking area:

Pollutant		Max. emission, gr/sec	Annual emission, t/year
Code	Description		
301	Nitrogen dioxide (Nitrogen (IV) oxide)	0.022009	0,0322
304	Nitrogen (II) oxide	0.003576	0,005232

328	Soot	0.002422	0,003708
330	Sulphur dioxide	0.003266	0,004357
337	Carbon oxide	0.062533	0,06846
2732	Hydrogens oil fraction	0.009692	0,011783

Emission calculation from a diesel reservoir (G-3)

The reservoir inspiratory valve is the source of atmospheric air pollution during the storage of oil products (small inspiration) and loading them (big inspiration). Climatic zone: 3.

The emissions of polluting substances are calculated in line with [8]. The quantitative and qualitative properties of polluting substances are given in Table 7.1.1.1.8.

Table 7.1.1.1.8.

Pollutant		Max. single emission, g/sec	Annual emission, t/year
Code	Description		
333	Dihydrosulfide(Hydrogen sulfide)	0.0000549	0,0000044
2754	Alkanes C ₁₂ -C ₁₉ (Saturated hydrogens C ₁₂ -C ₁₉)	0.0195451	0,001572

The source data to calculate the emission are given in Table 7.1.1.1.9.

Table 7.1.1.1.9.

Product	Qty a year, t/year		Reservoir design	Pump output, m ³ /h	Reservoir capacity, m ³	Number of reservoirs		Simultaneity
	B ₀ %	B ₀ %						
Diesel fuel, group A. The liquid temperature is close to the air temperature	160	160	Above-ground vertical exploitation mode "dosing". Emission limiting system – No	20	20	1		+

The accepted legend, calculation formulae and calculation parameters and their substantiation are given below.

Maximum emission of the oil products vapor (g/sec) is calculated by formula:

$$M = (C1 \cdot K^{\max}_p \cdot V^{\max}_t) / 3600, \text{ gr/sec};$$

Annual emission of the oil products vapor is calculated by formula:

$$G = (Y2 \cdot B_{03} + Y3 \cdot B_{07}) \cdot K^{\max}_p \cdot 10^{-6} + G_{xp} \cdot K_{HP} \cdot N, \text{ t/year.}$$

Where: $Y2, Y3$ – is the average specific emission from a reservoir during the year, in autumn-winter and spring-summer periods respectively, g/t. Its value is obtained from Annex 12.

B_{03}, B_{07} – is the amount of liquid to be loaded in the reservoir in autumn-winter and spring-summer periods, respectively, t.

K^{\max}_p – is the multiplier gained from the experiment. Its value is obtained from Annex 8.

G_{xp} – is the emission of oil products stored in one reservoir, t/year. Its value is obtained from Annex 13

K_{HP} – is the multiplier gained from the experiment. Its value is obtained from Annex 12.

N – is the number of reservoirs.

Maximum single and annual emissions of the polluting substances in the atmospheric air are calculated below.

Diesel fuel

$$M = 3,92 \cdot 0,9 \cdot 20 / 3600 = 0,0196 \text{ gr/sec};$$

$$G = (2,36 \cdot 160 + 3,15 \cdot 160) \cdot 0,9 \cdot 10^{-6} + 0,27 \cdot 0,0029 \cdot 1 = 0,0015764 \text{ t/year};$$

333 Dihydrosulfide (Hydrogen sulfide)

$$M = 0,0196 \cdot 0,0028 = 0,0000549 \text{ gr/sec};$$

$$G = 0,0015764 \cdot 0,0028 = 0,0000044 \text{ t/year};$$

2754 Alkanes C12-C19 (Saturated hydrogens C12-C19)

$$M = 0,0196 \cdot 0,9972 = 0,0195451 \text{ gr/sec};$$

$$G = 0,0015764 \cdot 0,9972 = 0,001572 \text{ t/year};$$

Emission calculation from the crushing plant (G-4)

The calculations are made in line with methodical guidelines [3]

The coefficients of specific dust emissions during the production of raw materials are as follows:

For primary and secondary crushing: (a) dry material - 0,14 kg/t, (b) wet material - 0,009 kg/t;

Following the technical process, the inert material is processed by using a wet method. So, the calculations use coefficient 0,009 kg/t

$$94\,500 \text{ t/year} \times 0,009 \text{ kg/t} \div 1000 = 0,8505 \text{ t/year}$$

$$0,8505 \text{ t/year} \div 6 \text{ h/day} \div 150 \text{ day/year} \div 3600 \times 1000000 = 0,2625 \text{ gr/sec}$$

Under Recommendation [3], during the technological process, followed by the emission of the weighted particles in the absence of closed buildings, or in the building not equipped by general exchange ventilation (emission takes place from the windows or door openings), or in the absence of the exhaust system, during the calculation of the emission of solid components into the atmospheric air, it is purposeful to correct the calculated value of the emission of harmful substances with 0,4 coefficient.

The value calculated in terms of the corrected emission is multiplied by coefficient 0,4:

Inorganic dust: (2908)

$$0,2625 \times 0,4 = 0,105 \text{ gr/sec};$$

$$0,8505 \times 0,4 = 0,3402 \text{ t/year}.$$

Emission calculation from a belt conveyor (G-5)

The calculation is accomplished in line with methodical guidance [4].

The transportation is done by means of open conveyor belts with the width of 1 m. Its total length is 10 m.

The design wind velocities (m/sec) are: 0,5(K3= 1); 5 (K3= 1,2). An average wind velocity: 2 (K3= 1,2)

The quantitative and qualitative properties of emission of polluting substances are given in Table 7.1.1.1.10.

Table 7.1.1.1.10. Quantitative and qualitative properties of emission of polluting substances as per methodology

Pollutant		Maximum emission, gr/sec	Annual emission, t/year
Code	Description		
2908	Grit	0.0032507	0,0087768

The source data to calculate the emission of polluting substances are given in Table 7.1.1.1.11.

Table 7.1.1.1.11.

Materia ls	Parameters	Simultaneity
---------------	------------	--------------

Grit	Operation time-900h/year; humidity: up to 10% ($K5 = 0,1$). size of particles-5-10mm. ($K7 = 0,6$). specific dusting- 0,0000045 kg/m ² *sec	+
------	---	---

The accepted legend, calculation formulae and calculation parameters and their substantiation are given below.

The emission of the total mass of weighted particles occurring during the material transportation with an open belt conveyor, is determined by formula:

$$MK = 3,6 \cdot K3 \cdot K5 \cdot WK \cdot L \cdot l \cdot \gamma \cdot T, \text{ t/year};$$

Where:

Where,

$K3$ – is the multiplier, considering local weather conditions;

$K5$ – is the multiplier, considering the material humidity;

WK – is the specific dust-formation from the belt conveyor, kg/m²*sec;

L - is the width of the belt conveyor, m.

l - is the length of the belt conveyor, m.

γ - multiplier, considering the forming of fine particles of the material;

T - is the annual operating time, h/year;

Maximum single emission originated during the material transportation from an open belt conveyor, is determined by formula:

$$M'K = K3 \cdot K5 \cdot WK \cdot L \cdot l \cdot \gamma \cdot 10^3, \text{ gr/sec};$$

Maximum single and annual emissions of the polluting substances in the atmospheric air are calculated below:

$$M'2902 \text{ } 0,5 \text{ m/sec} = 1 \cdot 0,1 \cdot 0,0000045 \cdot 10 \cdot 1 \cdot 0,6 \cdot 10^3 = 0,0027089 \text{ gr/sec};$$

$$M'2908 \text{ } 5 \text{ m/sec} = 1,2 \cdot 0,1 \cdot 0,0000045 \cdot 10 \cdot 1 \cdot 0,6 \cdot 10^3 = 0,0032507 \text{ gr/sec};$$

$$M2908 = 3,6 \cdot 1 \cdot 0,1 \cdot 0,0000045 \cdot 10 \cdot 1 \cdot 0,6 \cdot 900 = 0,0087768 \text{ t/year}.$$

Emission calculation from keeping and storage of inert materials (G-6)

Warehousing

The calculation is accomplished as per methodological guidance [4].

Unloading of the bulk materials is done without a loading sleeve. As for the local conditions, the warehouse is open from all sides ($K4 = 1$); The height of the material unloading is 1,0 m ($B = 0,5$); volley unloading from the truck is done of over 10 t of the material ($K9 = 0,1$); design wind velocities (m/sec): 0,5 ($K3 = 1$); 5 ($K3 = 1,2$); average annual wind velocity: 1,95 ($K3 = 1$).

The quantitative and qualitative properties of emissions of polluting substances are given in Table 7.1.1.1.12..

Table 7.1.1.1.12. Quantitative and qualitative properties of emission of polluting substances

Pollutant		Max. emission, gr/sec	Annual emission, t/year
Code	Description		
2908	Inorganic dust with the content of silicium dioxide of 70-20%	0,028	0,0756

The source data to calculate the emission of polluting substances are given in Table. 7.1.1.1.13.

Table 7.1.1.1.13. Source calculation data

Materials	Parameter	Simultaneity
Inert material	Quantity of the unloaded material: $G_{\text{ч}} = 105\text{t/hr}$; $G_{\text{annual}} = 94500\text{t/year}$. The mass share of a dust fraction in the material: $K_1 = 0,04$. The share of dust converting into aerosol: $K_2 = 0,02$. humidity 10% ($K_5 = 0,1$). material sizes 500-100 mm ($K_7 = 0,2$).	+

The accepted legend, calculation formulae and calculation parameters and their substantiation are given below:

A maximum single dust emission is calculated by formula:

$$MTP = K_1 \cdot K_2 \cdot K_3 \cdot K_4 \cdot K_5 \cdot K_7 \cdot K_8 \cdot K_9 \cdot B \cdot G_{\text{ч}} \cdot 10^6 / 3600, \text{ gr/sec}$$

Where:

K_1 - is the weight part of dust fraction in the material (0-200 mkm);

K_2 - is the dust part (of the total dust weight part) transforming into an aerosol (0-10 mkm);

K_3 - is the multiplier, considering the local weather conditions;

K_4 - is the multiplier, considering the local conditions, degree of protection of the unit against the external impact, conditions of dust-formation;

K_5 - is the multiplier, considering the material humidity;

K_7 - is the multiplier, considering the material sizes;

K_8 - is the correction multiplier for various materials by considering the dipper types when using a different type of a transfer; $K_8 = 1$;

K_9 - is the correction multiplier for volley unload from the truck;

B - is the multiplier, considering the dropping height;

$G_{\text{ч}}$ - is the amount of the material to transfer in one hour (t/h).

The total annual dust emission is calculated by formula:

$$\Pi TP = K_1 \cdot K_2 \cdot K_3 \cdot K_4 \cdot K_5 \cdot K_7 \cdot K_8 \cdot K_9 \cdot B \cdot G_{\text{год}}, \text{ t/year.}$$

Where:

$G_{\text{год}}$ - is the annual amount of the material to transfer, t/year;

Maximum single and annual emissions of the polluting substances in the atmospheric air are calculated below.

Inert material

$$M_{2908}^{0,5} \text{ m/sec} = 0,04 \cdot 0,02 \cdot 1 \cdot 1 \cdot 0,1 \cdot 0,2 \cdot 1 \cdot 0,1 \cdot 0,5 \cdot 105 \cdot 10^6 / 3600 = 0,0233333 \text{ gr/sec};$$

$$M_{2908}^{\text{с}} \text{ m/sec} = 0,04 \cdot 0,02 \cdot 1,2 \cdot 1 \cdot 0,1 \cdot 0,2 \cdot 1 \cdot 0,1 \cdot 0,5 \cdot 105 \cdot 10^6 / 3600 = 0,028 \text{ gr/sec};$$

$$\Pi_{2908} = 0,04 \cdot 0,02 \cdot 1 \cdot 1 \cdot 0,1 \cdot 0,2 \cdot 1 \cdot 0,1 \cdot 0,5 \cdot 94500 = 0,0756 \text{ t/year.}$$

Storage:

The calculation is accomplished as per methodological guidance [4]

The quantitative and qualitative properties of emission of polluting substances are given in Table 7.1.1.1.14.

Table 7.1.1.1.14. Quantitative and qualitative properties of emission of polluting substances

Pollutant		Max. emission,	Annual
Code	Description	gr/sec	emission, t/year
2908	Inorganic dust with the content of silicium dioxide of 70-20%	0,0036746	0,006932

The maximum single emission of dust during the storage of the bulk material is calculated by formula:

$$MXP = K_4 \cdot K_5 \cdot K_6 \cdot K_7 \cdot q \cdot F_{\text{паб}} + K_4 \cdot K_5 \cdot K_6 \cdot K_7 \cdot 0,11 \cdot q \cdot (F_{\text{пл}} - F_{\text{паб}}) \cdot (1 - \eta), \text{ gr/sec}$$

Where:

K_4 - is the multiplier, considering the local conditions, degree of protection of the unit against the external

impact and conditions of dust-formation;

$K5$ is the multiplier, considering the material humidity;

$K6$ is the multiplier, considering the profile of the stored material;

$K7$ is the multiplier, considering the sizes of the material;

$Fpaб$ is the area in the plan with regular warehousing operations (m^2);

$Fпл$ is the area of dust-formation in the plan (m^2);

q is the maximum single emission (g/sec) of specific dust formation, $g/(m^2 \cdot sec)$;

η – is the emission reduction degree by using a dust-reducer system.

The value of multiplier $K6$ is determined by formula:

$$K6 = F_{\text{макс}} / F_{\text{пл}}$$

Where:

$F_{\text{макс}}$ is the factual area of the stored material in terms of a full warehouse, m^2 ;

The maximum value of the dust specific dust-formation is determined by formula: $g/(m^2 \cdot sec)$;

$$q = 10^{-3} \cdot a \cdot U^b, \text{ gr}/(m^2 \cdot sec);$$

Where:

a and b – are empirical coefficients depending on the type of the material to transfer;

U – is the wind velocity, m/sec ;

Total annual dust emission in case of warehousing the bulk material is calculated by formula:

$$ПХР = 0,11 \cdot 8,64 \cdot 10^{-2} \cdot K4 \cdot K5 \cdot K6 \cdot K7 \cdot q \cdot F_{\text{пл}} \cdot (1 - \eta) \cdot (T - T_{\text{д}} - T_{\text{с}}) \text{ t/year};$$

Where:

T – is the full time of storage of the material in the time under consideration (day);

$T_{\text{д}}$ is the number of rainy days;

$T_{\text{с}}$ is the number of days with stable snow cover.

The design parameters and their values in are given in Table 7.1.1.1.15.

Table 7.1.1.1.15. Design parameters and their values

Design parameters	Values
Material to transfer: inert material empirical coefficients, which depend on the type of the material to transfer	$a = 0,0135$ $b = 2,987$
Local conditions: the warehouse is open from all four sides	$K4 = 1$
Material humidity: up to 10%	$K5 = 0,1$
Surface profile of the stored material	$K6 = 750 / 500 = 1,5$
Material sizes: 500-100 mm	$K7 = 0,4$
Design wind velocities, m/sec	$U' = 0,5; 3,91$
Average annual wind velocity, m/sec	$U = 1,95$
Working surface of the unloading works, m^2	$Fpaб = 25$
Area of dust-formation in the plan, m^2	$Fпл = 500$
Actual area of dust-formation in the plan, m^2	$F_{\text{макс}} = 750$
Full time of storage of the material in the time under consideration (day)	$T = 366$
Number of rainy days	$T_{\text{д}} = 41$
Number of days with stable snow cover	$T_{\text{с}} = 80$

Maximum single and annual emissions of the polluting substances in the atmospheric air are calculated below.

Inert material

$$q_{2908}^{0.5 \text{ m/sec}} = 10^{-3} \cdot 0,0135 \cdot 0,5^{2.987} = 0,0000017 \text{ gr}/(m^2 \cdot sec);$$

$$M_{2908}^{0.5 \text{ m/secc}} = 1 \cdot 0,1 \cdot 1,5 \cdot 0,4 \cdot 0,0000017 \cdot 25 +$$

$$+ 1 \cdot 0,1 \cdot 1,5 \cdot 0,4 \cdot 0,11 \cdot 0,0000017 \cdot (500 - 25) = 0,0000079 \text{ gr/sec};$$

$$q_{2908}^{\text{m/sec}} = 10^{-3} \cdot 0,0135 \cdot 3,91^{2.987} = 0,0007928 \text{ gr}/(m^2 \cdot sec);$$

$$M_{2908}^{\text{m/sec}} = 1 \cdot 0,1 \cdot 1,5 \cdot 0,4 \cdot 0,0007928 \cdot 25 +$$

$$+ 1 \cdot 0,1 \cdot 1,5 \cdot 0,4 \cdot 0,11 \cdot 0,0007928 \cdot (500 - 25) = 0,0036746 \text{ gr/sec};$$

$$q_{2908} = 10^{-3} \cdot 0,0135 \cdot 1,95^{2,987} = 0,0000992 \text{ gr}/(\text{m}^2 \cdot \text{sec});$$

$$II_{2908} = 0,11 \cdot 8,64 \cdot 10^{-2} \cdot 1 \cdot 0,1 \cdot 1,5 \cdot 0,4 \cdot 0,0000992 \cdot 500 \cdot (366 - 41 - 80) = 0,006932 \text{ t/year.}$$

Total of warehousing+ storage (2908) will be:

gr/sec: Warehousing + storage	0,028	0,0036746	Σ 0.0316746
t/year: Warehousing + storage	0,0756	0,006932	Σ 0.082532

Emission calculation from keeping and storage of fractioned grit (G-7)

Warehousing

The calculation is accomplished as per methodological guidance[4]

Unloading of the bulk materials is done without a loading sleeve. As for the local conditions, the warehouse is open from all sides ($K_4 = 1$); The height of the material unloading is 1,0 m ($B = 0,5$); volley unloading from the truck is done of over 10 t of the material ($K_9 = 0,1$); design wind velocities (m/sec): 0,5 ($K_3 = 1$); 5 ($K_3 = 1,2$); average annual wind velocity: 1,95 m/sec ($K_3 = 1$).

Quantitative and qualitative properties of emission of polluting substances are given in Table 7.1.1.1.16.

Table 7.1.1.1.16.. Quantitative and qualitative properties of emission of polluting substances

Pollutant		Max. emission, gr/sec	Annual emission, t/year
Code	Description		
2908	Inorganic dust with the content of silicium dioxide of 70-20%	0,0528	0,14256

The source data to calculate the emission of polluting substances are given in Table 7.1.1.1.17.

Table 7.1.1.1.17. Source calculation data

Materials	Parameter	Simultaneity
Grit	Quantity of the unloaded material: $G_{\text{gr}} = 66 \text{ t/hr}$; $G_{\text{year}} = 59400 \text{ t/year}$. The mass share of a dust fraction in the material: $K_1 = 0,04$. The share of dust converting into aerosol: $K_2 = 0,02$. Humidity up to 10% ($K_5 = 0,1$). material sizes 10-50 mm ($K_7 = 0,6$).	+

The accepted legend, calculation formulae and calculation parameters and their substantiation are given below:

Single dust emission is calculated by formula:

$$MFP = K_1 \cdot K_2 \cdot K_3 \cdot K_4 \cdot K_5 \cdot K_7 \cdot K_8 \cdot K_9 \cdot B \cdot G_{\text{gr}} \cdot 10^6 / 3600, \text{ gr/sec}$$

Where:

A maximum single dust emission is calculated by formula:

$$MFP = K_1 \cdot K_2 \cdot K_3 \cdot K_4 \cdot K_5 \cdot K_7 \cdot K_8 \cdot K_9 \cdot B \cdot G_{\text{gr}} \cdot 10^6 / 3600, \text{ gr/sec}$$

Where:

K_1 - is the weight part of dust fraction in the material (0-200 mkm);

K_2 - is the dust part (of the total dust weight part) transforming into an aerosol (0-10 mkm);

K_3 - is the multiplier, considering the local weather conditions;

K_4 - is the multiplier, considering the local conditions, degree of protection of the unit against the external impact, conditions of dust-formation;

K_5 - is the multiplier, considering the material humidity;

K_7 - is the multiplier, considering the material sizes;

K_8 - is the correction multiplier for various materials by considering the dipper types when using a different type of a transfer; $K_8 = 1$;

K_9 is the correction multiplier for volley unload from the truck;

B – is the multiplier, considering the dropping height;

$G_{\text{т-с}}$ is the amount of the material to transfer in one hour (t/h).

The total annual dust emission is calculated by formula:

$$\text{ППР} = K_1 \cdot K_2 \cdot K_3 \cdot K_4 \cdot K_5 \cdot K_7 \cdot K_8 \cdot K_9 \cdot B \cdot G_{\text{год}}, \text{ t/year.}$$

Where: $G_{\text{год}}$ – is the annual amount of the material to transfer, t/year;

Maximum single and annual emissions of the polluting substances in the atmospheric air are calculated below.

Grit

$$M_{2908}^{0,5} \text{ m/sec} = 0,04 \cdot 0,02 \cdot 1 \cdot 1 \cdot 0,1 \cdot 0,6 \cdot 1 \cdot 0,1 \cdot 0,5 \cdot 66 \cdot 10^6 / 3600 = 0,044 \text{ gr/sec};$$

$$M_{2908}^{\text{б}} \text{ m/sec} = 0,04 \cdot 0,02 \cdot 1,2 \cdot 1 \cdot 0,1 \cdot 0,6 \cdot 1 \cdot 0,1 \cdot 0,5 \cdot 66 \cdot 10^6 / 3600 = 0,0528 \text{ gr/sec};$$

$$\Pi_{2908} 0,04 \cdot 0,02 \cdot 1 \cdot 1 \cdot 0,1 \cdot 0,6 \cdot 1 \cdot 0,1 \cdot 0,5 \cdot 59400 = 0,14256 \text{ t/year.}$$

Storage:

The calculation is accomplished as per methodological guidance [4]

Quantitative and qualitative properties of emission of polluting substances are given in Table 7.1.1.1.18.

Table 7.1.1.18.. Quantitative and qualitative properties of emission of polluting substances

Pollutant		Max. emission, gr/sec	Annual emission, t/year
Code	Description		
2908	Inorganic dust with the content of silicium dioxide of 70-20%	0,0022048	0,0041592

The maximum single emission of dust during the storage of the bulk material is calculated by formula:

$$\text{MXP} = K_4 \cdot K_5 \cdot K_6 \cdot K_7 \cdot q \cdot F_{\text{раб}} + K_4 \cdot K_5 \cdot K_6 \cdot K_7 \cdot 0,11 \cdot q \cdot (F_{\text{пл}} - F_{\text{раб}}) \cdot (1 - \eta), \text{ gr/sec}$$

Where:

K_4 is the multiplier, considering the local conditions, degree of protection of the unit against the external impact and conditions of dust-formation;

K_5 is the multiplier, considering the material humidity;

K_6 is the multiplier, considering the profile of the stored material;

K_7 is the multiplier, considering the sizes of the material;

$F_{\text{раб}}$ is the area in the plan with regular warehousing operations (m^2);

$F_{\text{пл}}$ is the area of dust-formation in the plan (m^2);

q is the maximum single emission (g/sec) of specific dust formation, $\text{g}/(\text{m}^2 \cdot \text{sec})$;

η – is the emission reduction degree by using a dust-reducer system.

The value of multiplier K_6 is determined by formula:

$$K_6 = F_{\text{макс}} / F_{\text{пл}}$$

Where:

$F_{\text{макс}}$ – is the factual area of the stored material in terms of a full warehouse, m^2 ;

The maximum value of the dust specific dust-formation is determined by formula: $\text{g}/(\text{m}^2 \cdot \text{sec})$;

$$q = 10^{-3} \cdot a \cdot U^b, \text{ gr}/(\text{m}^2 \cdot \text{sec});$$

Where:

a and b – are empirical coefficients depending on the type of the material to transfer;

U^b – is the wind velocity, m/sec;

Total annual dust emission in case of warehousing the bulk material is calculated by formula:

$$\Pi_{\text{XP}} = 0,11 \cdot 8,64 \cdot 10^{-2} \cdot K_4 \cdot K_5 \cdot K_6 \cdot K_7 \cdot q \cdot F_{\text{пл}} \cdot (1 - \eta) \cdot (T - T_{\text{д}} - T_{\text{с}}) \text{ t/year};$$

Where:

T – is the full time of storage of the material in the time under consideration (day);

$T_{\text{д}}$ is the number of rainy days;

T_c - is the number of days with stable snow cover.

The design parameters and their values in are given in Table 7.1.1.1.19.

Table 7.1.1.1.19. Design parameters and their values

Design parameters	Values
Material to transfer: inert material empirical coefficients, which depend on the type of the material to transfer	$a = 0,0135$ $b = 2,987$
Local conditions: the warehouse is open from all four sides	$K_4 = 1$
Material humidity: up to 10%	$K_5 = 0,1$
Surface profile of the stored material	$K_6 = 300 / 200 = 1,5$
Material sizes: 5-10 mm	$K_7 = 0,6$
Design wind velocities, m/sec	$U' = 0,5; 3,91$
Average annual wind velocity, m/sec	$U = 1,95$
Working surface of the unloading works, m ²	$F_{раб} = 10$
Area of dust-formation in the plan, m ²	$F_{пл} = 200$
Actual area of dust-formation in the plan, m ²	$F_{макс} = 300$
Full time of storage of the material in the time under consideration (day)	$T = 366$
Number of rainy days	$T_{д} = 41$
Number of days with stable snow cover	$T_c = 80$

Maximum single and annual emissions of the polluting substances in the atmospheric air are calculated below:

Grit

$$q_{2908}^{0.5 \text{ m/sec}} = 10^{-3} \cdot 0,0135 \cdot 0,5^{2,987} = 0,0000017 \text{ gr}/(\text{m}^2 \cdot \text{sec});$$

$$M_{2908}^{0.5 \text{ m/sec}} = 1 \cdot 0,1 \cdot 1,5 \cdot 0,6 \cdot 0,0000017 \cdot 10 +$$

$$+ 1 \cdot 0,1 \cdot 1,5 \cdot 0,6 \cdot 0,11 \cdot 0,0000017 \cdot (200 - 10) = 0,0000047 \text{ gr}/\text{sec};$$

$$q_{2908}^{5 \text{ m/sec}} = 10^{-3} \cdot 0,0135 \cdot 3,91^{2,987} = 0,0007928 \text{ gr}/(\text{m}^2 \cdot \text{sec});$$

$$M_{2908}^{5 \text{ m/sec}} = 1 \cdot 0,1 \cdot 1,5 \cdot 0,6 \cdot 0,0007928 \cdot 10 + 1 \cdot 0,1 \cdot 1,5 \cdot 0,6 \cdot 0,11 \cdot 0,0007928 \cdot (200 - 10) = 0,0022048 \text{ gr}/\text{sec};$$

$$q_{2908} = 10^{-3} \cdot 0,0135 \cdot 1,95^{2,987} = 0,0000992 \text{ gr}/(\text{m}^2 \cdot \text{sec});$$

$$M_{2908} = 0,11 \cdot 8,64 \cdot 10^{-2} \cdot 1 \cdot 0,1 \cdot 1,5 \cdot 0,6 \cdot 0,0000992 \cdot 200 \cdot (366 - 41 - 80) = 0,0041592 \text{ t}/\text{year}.$$

Total of receipt + storage (2908) will be:

gr/sec: warehousing+storage	0,0528	0,0022048	Σ 0.0550048
t/year: warehousing+storage	0,14256	0,0041592	Σ 0,1467192

7.1.1.2 Emission calculations

Recommendations of Articles 5 and 8 of the Technical Regulation №408 “on approving the Technical Regulation of Calculation Maximum Admissible Emissions of Harmful Substances into the Air” of the Government of Georgia of December 31, 2013 should be used for the assessment of the air pollution within the study area.

Background pollution indicators methodology is considered for the assessment of the areas for which there is no observed data. According to the methodology, assessment of ambient air quality is conducted according to the number of population (Table 7.1.1.2.1.).

Table 7.1.1.2.1. Recommended background values of pollutants according to the number of population

Population, (1,000 persons)	Background pollution levels, mg/m ³			
	NO ₂	SO ₂	CO	Dust
250-125	0,03	0,05	1,5	0,2
125-50	0,015	0,05	0,8	0,15
50-10	0,008	0,02	0,4	0,1
<10	0	0	0	0

As the population adjacent to the object does not exceed 10 000 (vilage Didi Mughanlo, population of 1286 men according to -2014 population census) the values of background concentration are taken from the relevant table (<10).

Based on the above-given calculation, the dispersion was calculated according to [12]. The design rectangle is 3000 * 2000 m, with 100 m interval.

Under the effective legislation, the MAE (maximum admissible emission) standards are determined at the border of the nearest settled area from the object and within a 500-m radius. Control points on the border of the settled area (N^o 1÷4) and on the border of a 500-m radius (points N^o5÷8)

Control Sites


N ^o	Point coordinates (m)		Height (m)	Type of point	Comment
	X	Y			
1	-1479,00	-393,00	2	A point on the border of the settled area	The nearest settlement in the west (direct distance 1,33 km)
2	-1005,00	-747,00	2	A point on the border of the settled area	The nearest settlement south-west (direct distance 1,00 km)
3	-312,00	-1108,00	2	A point on the border of the settled area	The nearest settlement south (direct distance 0,83 km)
4	-149,00	-1267,00	2	A point on the border of the settled area	The nearest settlement south (direct distance 0,89 km)
5	28,00	566,00	2	500-m zone	N
6	817,00	-206,00	2	500-m zone	E
7	117,00	-910,00	2	500-m zone	S
8	-673,00	-146,00	2	500-m zone	W

Table 7.1.1.2.2 gives the values of maximum concentrations of pollutants with MAC weights.

Table 7.1.1.2.2 Maximum concentrations of pollutants with MAC weights at control points

Description of harmful substances	Share of the maximum MAC of harmful substances from the object	
	At the border of the nearest settled area	On the border of a 500-m zone radius
1	2	3
Nitrogen dioxide	0,0099	0,02
Nitrogen oxide	0,00089	0,0014
Soot	0,0015	0,0026
Sulphur dioxide	0,00084	0,0015
Dihydrosulfide (Hydrogen sulfide)	0,00081	0,0025
Carbon oxide	0,0011	0,002
Oil fraction	0,00073	0,0013
Saturated hydrogens C12-C19	0,0023	0,0071
Inorganic dust: 70-20% SiO ₂	0,05	0,1
Summarized impact group: 6043 Sulphur dioxide and Hydrogen sulphide	0,0067	0,01
Summarized impact group: 6046 Carbon oxide and cement production dust	0,00084	0,0033
Incomplete summarized impact group 6204 "1.6" with coefficient: Nitrogen dioxide, Sulphur dioxide	0,05	0,1

Graphical materials of the calculation results

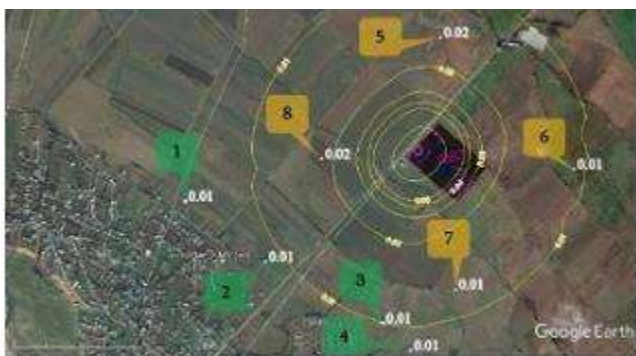

Maximum concentration of sulphur dioxide (code 330) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8).



Maximum concentration of nitrogen oxide (code 324) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8).



Maximum concentration of sulphur dioxide (code 330) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8).



Maximum concentration of sulphur hydrogen (code 333) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8).



Maximum concentration of carbon oxide (code 327) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8).



Maximum concentration of oil fraction of saturated hydrocarbon (code 2732) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8).



Maximum concentration of heavy fractions of saturated hydrocarbon (code 2734) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8).




Maximum concentration of inorganic dust (code 2908) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8).



Maximum concentration of insecticide total impact group 6009 (index 301-330) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8)



Maximum concentration of total impact group 6043 (index 330-333) points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8)

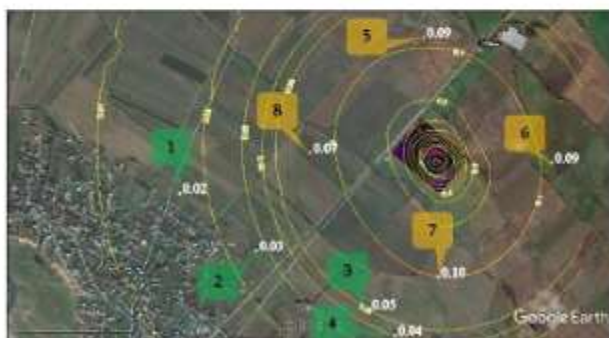

Maximum concentration of total impact group 6046 (index 337-390) at control points (nos. 1-4), at the nearest settlements and at the border of 500-m radii zone (nos. 5-8)

Conclusion

The calculation results show that during the operation phase of the construction camp, the air quality of the adjoining areas on the border of 500-m radius and the nearest residential area will not exceed the limits prescribed by the law.

Based on the calculation results, it may be said that the propagation of pollutants from the camp territory and its negative impact will not be high, and general mitigation measures will be absolutely sufficient.

Table data of calculations are given in Annex 3.

7.1.2 Exploitation phase

The emissions into the atmosphere in the highway exploitation phase are associated with the operation of the motor transport engines.

Noise propagation is associated with: operation of the vehicle engines; friction of tires and road surface; sonar signals.

However, it should be noted that the selected alternative corridor will be more distanced from the residential areas than the existing road.. At the same time, as the roadway is widened and the gradients and turning angles will be reduced, the risk of traffic jams will diminish a lot and the load on the vehicle engines will not be so high in case of overtaking. Consequently, the emissions of combustion products will be diminished

7.1.3 Impact mitigation measures

Operation phase

The following mitigation measures to reduce dust and combustion products emission into the atmospheric air must be taken during the road construction:

- The stationery sources of emission (e.g. concrete plant and other) will be installed as far as possible from the population and will be equipped with relevant filters;
- The construction contractor will be charged with developing relevant air protection document in line with the effective legislation, which will be submitted to the Ministry and the stationery objects of emission will be agreed before putting them to operation
- Limiting operation and driving speeds near the residential areas;
- Using alternative routes for the transport operations;
- Limiting idling of the engines of machines and equipment;
- The technical state of the exploited machiens will be subject to permanent control.
- During the transportation of easily dusting materials across the settled areas or in windy weather, method of covering the trucks with tarpaulin will be used;
- Loading and unloading heights of the materials in the vehicles will be minimized to the extent possible;

The dusting materials will be subject to the relevant management to reduce dust propagation. An efficient way to reduce dust emissions may be the regular watering of the roads near the settled areas in dry weather.

Operation phase

Following the accomplished valuation, it may be said that the operation of the improved section of Rustavi-Red Bridge highway will not significantly increase the discomfort caused by dust and emissions. In the final run, maximal maintenance of the vegetation and additional landscaping of the construction corridor is an efficient means of dust control.

7.2 Noise and vibration propagation

7.3 Noise level standards

Admissible noise standards in the residential areas are similar under the requirements of the IFC instructions and the legislation of Georgia. The admissible norms of noise is defined by the Decree # 297/N of the Ministry of Health, Labor and Social Affairs of Georgia “on Proving the Qualitative Norms of the Environment” of August 16, 2001. There are defined as the admissible norms of noise as the maximum of the admissible norms for several zones of the territories.. The standard requirements for noise for the residential areas are given in **Table 7.3.1** (It should be noted the Georgian standards apply to the maximum admissible norms in the building, not on the building facade).

For IFC noise impacts should not exceed the levels presented in 7.3.2 Table or result in a maximum increase in background levels of 3 dB at the nearest receptor location off site. This project will comply with both IFC Guidelines and Georgian Standards. Note that Georgian standards refer to the allowable limits indoors, not at the building façade.

Table 7.3.1 Georgian Standards for Noise Levels

Receptor	Time interval	Average admissible noise level (dB)	Maximum admissible noise level (dB)
Residential	7:00-23:00	55	70
Residential	23:00- 7:00	45	60
Commercial	24 hours	60	75

Table 7.3.2 IFC Noise Level Guidelines

Receptor	One hour L_{aeq} (dB)	
	During the day 07.00-22.00	At night 22.00 – 07.00
Residential; institutional; educational	55	45
Industrial; commercial	70	70

For workplace noise the following IFC standards are applicable (**Table 3**)

Table 7.3.3 IFC Work Environment Noise limits

Type of Work, workplace	IFC General EHS Guidelines
Heavy Industry (no demand for oral communication)	85 Equivalent level L_{aeq} ,8h
Light industry (decreasing demand for oral communication)	50-65 Equivalent level L_{aeq} ,8h

7.3.1 Noise sources, noise modeling methods

CadnaA (Computer Aided Noise Abatement) is the leading software for calculation, presentation, assessment and prediction of environmental noise. Whether your objective is to study the noise emission of an industrial plant, of a mart including a parking lot, of a new road or railway scheme or even of entire towns and urbanized areas: CadnaA is designed to handle all these tasks.

With more than 30 standards and guidelines, powerful calculation algorithms, extensive object processing tools, outstanding 3D visualization and very user-friendly interface CadnaA is the perfect

software to handle national and international noise calculation and noise mapping projects of any size.

With its technical capabilities and ease to use, CadnaA represents the state-of-the-art technology. CadnaA is developed in C/C++ and communicates perfectly with other Windows applications like word processors, spreadsheet calculators, CAD software and GIS-databases. CadnaA includes a multi-lingual user interface and is successfully applied in more than 60 countries all over the world.

In order to use the software, it was necessary to accomplish a number of studies to gather the necessary information for modeling.

Present situation

The main source of noise in the project zone is vehicles. The traffic in the project zone is quite intense, but without traffic jams. The situation is aggravated by the hard situation with the vehicle fleet in Georgia evidenced by statistics, under which:

1. 57% of the existing vehicles are manufactured before 1998;
2. 23% of the existing vehicles are manufactured before 2003;
3. 18% of the existing vehicles are manufactured before 2008;
4. Only 3% of the existing vehicles are manufactured before 2013.

Following the above-mentioned, in case of same traffic intensity, old, 20-25-year-old car models are more dangerous than new vehicle models, including the less noisy ones. At the same time, old and often faulty vehicles produce more noise than the new vehicles of the same class.

Existing infrastructure

As already mentioned, there are a number of settled areas and small and average businesses structures adjacent to the project zone. Mostly, these are repairs and maintenance offices, car washing areas and gas and petrol fueling stations. All these objects are a source of the noise.

Traffic study on the Sadakhlo Bridge from the starting point to the destination

On April 6, 7, 10 and 11 of 2017, at the stage of feasibility study and detailed design, traffic survey was accomplished from the starting point to the destination (OD) at the crossing point with the Red Bridge border. OD survey yielded the following results:

- Time;
- Type of vehicle (motorcycles/vehicles and mini-buses with/wo trailer/LGV/2 axles/3 axles/4+axles/buses and carriages and excursion buses);
- Vehicle registration country;
- Number of passengers in the vehicle;
- Origin (country/city/region);
- Reason (home/trip/job/business/study/trade/private affair/visiting friends/seminar & free time/other);
- Country of destination (country/city/region);
- Travel frequency;
- Types of lorry cargos (food/oil products/aggregareminerals/construction products/agricultural products/ISO containers/other).

The information about trip motifs and types of cargos is used for traffic prediction purposes. Information about OD is used as a basis for a traffic model to predict further traffic intensity on the new and existing roads.

Traffic intensity from Marneuli to Sadakhlo

Traffic survey was done from Marneuli to Sadakhlo (S7) from May 2 to May8, 2017, between 06:00 am and 19:00. Traffic survey on May3/4, with 24-hour counting was done at the following locations:

- Location: №1Sadakhlo
- Location: №2Maradisi
- Location:: №3Marneuli

Traffic intensity was calculated according to location, time and direction. The tables below show AADT (Annual average daily traffic) intensities. The given intensities were adjusted due to the seasonal impact, in which the intensities fixed at the Red Bridge border were used (daily intensities for more than 5 years).

Table 7.3.1.1. Traffic intensities from Marneuli to Sadakhlo

AADT S4 Rustavi-Red Bridge	Motor -cycle	Car& 4X4	Mini-bus	Med. Bus/Large bus	Small lorry	Big lorry	Carriages
1. Sadakhlo	0	2767	103	46	125	271	2312
2. Maradisi	0	7329	556	159	1430	279	9753
3. Marneuli	4	8858	1975	48	1222	649	10754

Traffic forecasts

Based on the analysis done within the scope of the project, the following traffic forecast was provided:

- Detailed forecasts of annual traffic for 10-year period from the toad completion;
- More general forecasts of future traffic for the following 20 years.

Despite the fact that accent was made on accurate prediction, at an early stage of the project, all traffic forecast will be given for high growth dynamics.

Table 7.3.1.2. gives expected traffic growth along road section Rustavi – Sadakhlo by 2025.

⁶ Development of the Feasibility Study and Detailed Design of the Fourth East-West Highway Improvement Project to modernize Rustavi-Red Bridge and Rustavi-Sadakhlo Roads - 2017

Table 7.3.1.2. Traffic intensities from Rustavi to Sadakhlo by 2025

AADT S4 Rustavi-Red Bridge	Motor -cycle	Car& 4X4	Mini-bus	Med. Bus/Large bus	Small lorry	Big lorry	Carriages
Sadakhlo border	0	4 300	200	75	200	500	5 200
From Sadakhlo to village Kvemo	0	4 000	200	71	200	500	5 000
From village Kvemo to the interchange	0	7 500	500	200	1 300	500	10 000
From the interchange to Algeti	2	9 800	1 500	100	1 400	1 700	14 500
From Algeti to Rustavi	2	10 700	1 500	100	1 700	1 800	15 800
Rustavi	7	20 800	2 500	100	1 800	2 000	27 300

Environmental conditions

The project zone is the territory with frequent winds of different strengths. Following the local relief, the main wind direction is from south to west. Clearly, under the action of the winds, which blow from the source of noise towards the sensitive site, the noise level will increase and the stronger the wind is, the stronger this effect is, if wind is not a dominant source of noise or is not so strong to cause propagation of the “problematic” noise.

7.3.2 Present situation

As already mentioned, within the scope of the project, noise modeling was done for four stages: (i) existing situation – present-project; (ii) construction phase; (iii) operation phase following the completion of construction, and (iv) operation phase by 2015.

As already mentioned, within the scope of the project, noise modeling was done for four stages: (i) existing situation – present-project; (ii) construction phase; (iii) operation phase following the completion of construction, and (iv) operation phase by 2015.

260 buildings and premises are found on the territory adjacent to the project zone. Annex 7 gives possible level of noise impact on each building.

At present, the noise level caused by transport on 57 of the existing buildings and premises exceeds the maximum value specified by the Georgian legislation.

7.3.3 Construction phase

The major sources of noise in the construction phase are the construction and auxiliary techniques. The main operation sites of such techniques are the construction corridor and the construction camp.

7.3.3.1 Construction Camp

Within the scope of the project, one principal and 2 auxiliary construction camps are planned to provide. Means of production will be provided at the main camp. As for the auxiliary camps, they will be mostly used to park construction techniques and store means of production.

The strongest source of noise at the main camp is the concrete plant. Other premises will be used as office or auxiliary buildings. A vehicle parking area will also be placed adjacent to the main camp.

As the modeling results suggest, noise level near the buildings and premises adjacent to the main camp will not exceed the admissible standard. The nearest building is located 800 m from the main camp. Modeling results for noise caused by the camp operation are shown in Figure 7.3.3.1.1.

Figure 7.3.3.1.1: Noise propagation modeling on the territory adjacent to the main camp



As the Figure shows, the noise level caused by the camp operation on the territory adjacent to the camp will be within the admissible norms

7.3.3.2 Construction corridor

A problem of noise propagation in the construction phase is one of the most important issues. As the results of the accomplished measurements evidence (Annex 7), the level of baseline noise near the receptors of the project area exceeds the admissible standards during the day. As a result of using heavy techniques in the construction phase, the noise level is expected to increase further. Consequently, a number of mitigation measures must be developed and realized to avoid an increase in the noise level in the project zone. The results provided in Annex 7 show that the noise level in the construction phase will exceed the admissible standard at 52 buildings.

The Construction Contractor, prior to the onset of the construction, must develop and submit the Supervision Consultant a NoiseManagementPlan for the construction phase. The Plan must envisage all the existing technologies and best practice to avoid occurrence of noise and/or minimize the noise level.

7.3.4 Mitigation Measures

7.3.4.1 Mitigation at a noise source

Source control is, in general, the most effective form of noise mitigation and involves controlling a noise source before it is able to emit potentially offensive noise levels. Construction noise (except blasting operations) is typically generated by two source types: (i) Stationary equipment; and (ii) Mobile equipment.

The noise level can be mitigated by using the following measures:

- **Less noisy equipment:** One of the most efficient ways to reduce noise caused by individual equipment is using less noisy equipment. By selecting and/or using less noisy equipment, noise can be reduced or eliminated in some cases. Source control may yield additional benefit, in particular, in respect of promoting the introduction of technological achievements of less noisy equipment;
- **Mufflers:** Most construction noise originates from internal combustion engines. A large part of the noise emitted is due to the air intake and exhaust cycle. Specifying the use of adequate muffler systems can control much of this engine noise (Figure 7.4.4.1).
- **Shields:** Employing shields that are physically attached to the particular piece of equipment is effective, particularly for stationary equipment and where considerable noise reduction is required (Figure 7.3.4.2).

Figure 7.3.4.1.: Muffler system



Figure 7.3.4.2.: Using shields



- **Aprons:** Sound aprons generally take the form of sound absorptive mats hung from the equipment or on frames attached to the equipment. The aprons can be constructed of rubber, lead-filled fabric, or PVC layers with possibly sound absorptive material covering the side facing the machine. Sound aprons are useful when the shielding must be frequently removed or if only partial covering is possible.
- **Enclosures:** Enclosures for stationary work may be constructed of wood or any other suitable material and typically surround the specific operation area and equipment. The walls could be lined with sound absorptive material to prevent an increase of sound levels within the structure. They should be designed for ease of erection and dismantling.

7.3.4.2 Mitigation Along the Path

In some situations, such as in urban areas or on isolated sections of a project (tunnel installation area), it may be beneficial and necessary to construct barriers adjacent to the work area or at the right-of-way (RoW). These can take the form of natural shielding, temporary shielding, and/or permanent shielding.

Temporary abatement techniques include the use of temporary and/or movable shielding for both specific and nonspecific operations. Some mobile shielding is capable of being moved intact or being repeatedly erected and dismantled to shield a moving operation. An example of such a barrier utilizes noise curtains in conjunction with trailers to create an easily movable, temporary noise barrier system.

7.3.4.3 Mitigation at the existing receptors

A receiver can vary in its complexity, ranging anywhere from relocating residents for a day to insulation of a building. Even after mitigation measures have been applied, the outcome may still be unpredictable with no guarantees that the implemented methods achieve expected results. Therefore, mitigation at the receiver should only be considered as a last alternative. However, there are cases where creative techniques have been successfully implemented

7.3.4.4 Training Programs for Contractors

Require contractors to participate in training programs related to project-specific noise requirements, specifications, and/or equipment operations. Such training may be provided by agency or project management personnel, outside consultants, and/or equipment manufacturers or suppliers. For example, project personnel (or consultants assigned to the project) may train the contractor in the measurement of construction-related noise levels that may be required to meet the contract specifications.

In addition to the additional mitigation measures proposed by the Contractor, the latter must observe the norms, which are common for the construction phase of any project. Such norms are:

- Use of non-faulty construction techniques and vehicles;
- Implementing the noisy works during the day as far as possible;
- Running the vehicle drives at minimal speed.

7.3.5 Operation phase

In the operation phase (2020), the noise level will exceed the admissible level only at 32 building and 64 at night. As for the modeling results as for 2015, which were based on quite a high coefficient of increased traffic along the given highway, the noise level exceeded the admissible standard at 58 buildings during the day and at 112 buildings at night.

Note: within the scope of the project ICF approach was used to determine maximally admissible noise level. The given approach, unlike the legislation of Georgia, admits an excess of the baseline noise

level by 3 dB even if the baseline noise level exceeds the admissible level.

Figures 7.3.5.1 and 7.3.5.2 show the level of noise impact on buildings and premises in the vilage of Kirovka with and without barriers by 2025.

Figure 7.3.5.1.: Excess noise level on buildings and premises by 2025 (Vilage Kirovka)



Figure 7.3.5.2.: Noise level by using barriers by 2025 (Vilage Kirovka)



7.4 Changes in the geological environment and expected impacts on the geological environment


7.4.1 Construction Phase

As per the accomplished engineering-geological survey suggests, the project corridor is in a satisfactory state. No hazardous active geodynamic events (landslides, rock fall, etc.) are fixed within its limits or adjacent to. Thus, the project does not require important reinforcement works.


The relief along the most part of the project corridor is satisfactory to provide the roadbed. Consequently, no slope cutting or terracing will be necessary and the roadbed will be provided as embankments. In this respect, it should be noted that the section of the corridor running across the hilly relief near village Sarali at the coordinates: from x485874; y4577643 to x484341; y4576277, is noteworthy. A cut will be necessary to provide along this section. Besides, few cuts will be made near village Sadakhlo. By considering the physical-mechanical properties of the bedrocks, the risks of gravitational events to develop are not high on this site and selecting the relevant inclination angle for the treated slope will be absolutely sufficient.

When making the sections, providing due inclination angle for the cut-down slopes will be of importance. By considering the physical-mechanical properties of the rocks, an inclination angle of the cut-down slopes will be 3H/2V. A cross section of the project bedrock along the given section is given in Drawings 7.3.1.1.

Figure 7.4.1.1. Typical cross section on the sites where the cuts are to be provided

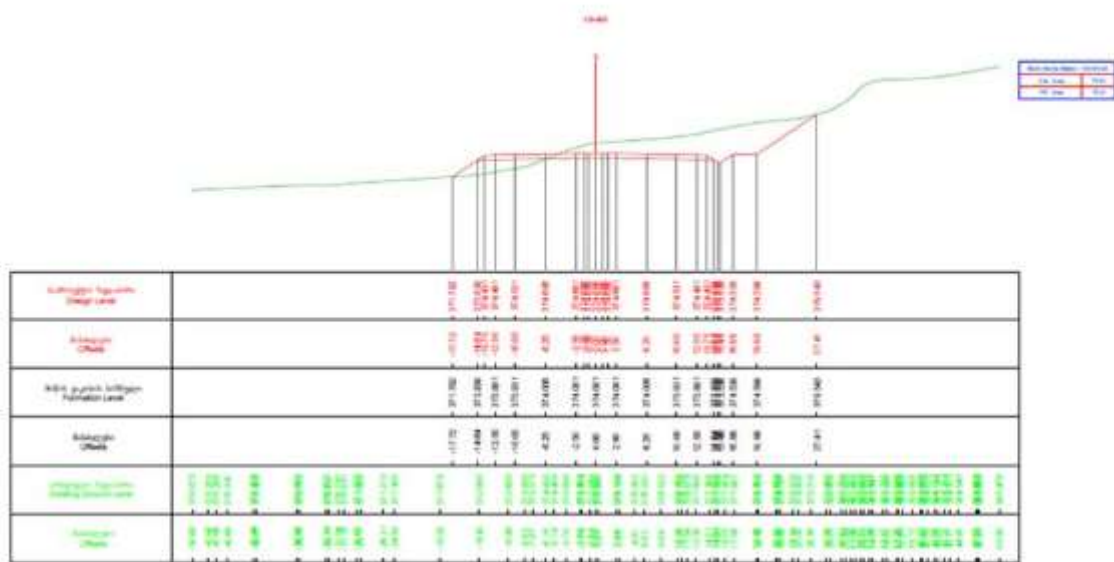

Tbilisi, 2019

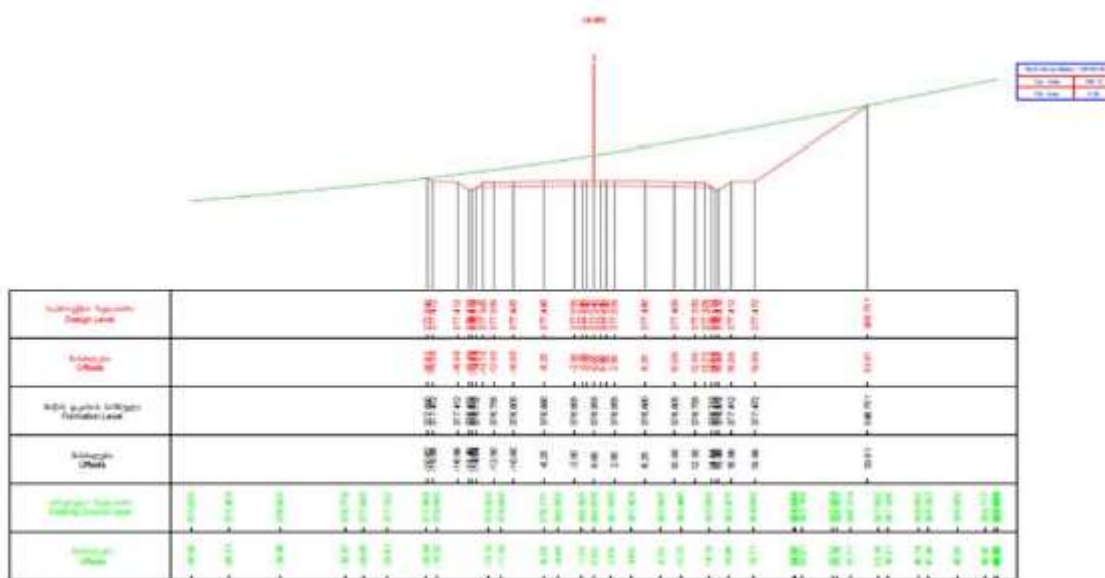

In addition to due terracing the cut-down slopes, the measures specified by the recommendations of Paragraph 5.5.5.4 will be taken, which envisage the use of geosynthetic materials on the slope.

As already mentioned, at other sections of the project area, mostly fills will be provided. An average height of a fill will be 24 m what is additional load of 480 KPa applied to the existing ground (fill volume weight $g = 20 \text{ KN/m}^3$). If the existing ground is not stable, additional reinforcement will be provided from beneath the fill (such as grooved piles, stone columns, rigid frames or preliminary load + drainage pipes). Besides, the recommendations provided in paragraph 5.5.5.4 will be considered when providing the embankments.

For the foundations of the supports of the artificial structures (bridges) crossing the surface water objects, the existing washing depths will be considered and anti-erosion measures will be taken (paragraph 4.8).

As the great part of the project corridor runs across the flat relief, the probability of anthropogenic change of the drainage conditions of the construction grounds is noteworthy during the construction works, as his may cause anthropogenic bogging of small adjacent sites. An important mitigation measures to reduce the risks of impact is providing the drainage channels of a relevant length along the perimeter of the working zone (on some sites it may become necessary to use small capacity pumps as well). The drainage systems must ensure maximally natural distribution of the rainwater flown to the project corridor so that no anthropogenic change of ground water levels occurs on individual sites. Conducting capacity of temporary drainage systems must be maintained for the whole cycle of the project, and for this purpose, they will be cleaned/put to order on a periodic basis.

Overall, It may be said that the project corridor runs across great and less sensitive areas in an engineering-geological respect. However, following the relevant mitigation measures, the construction works will not lead to significantly increased risks of hazardous processes to develop.

7.4.2 Operation phase

Provided the measures specified by the project and recommendations presented based on the engineering-geological studies are duly realized, the risk of development of hazardous geodynamic processes is not high. At the given stage of activity, monitoring of the trouble-free operation of the highway components (drainage systems, water conducting pipes, etc.) and taking rehabilitation and cleaning works as necessary is important.

7.4.3 Impact mitigation measures

In order to ensure the stability of the geological environment, in the construction phase, the following mitigation measures will be taken:

- The slopes on the sites of sections will be duly terraced. The terraced sites will be provided with relevant drainage.
- When providing the embankments, the bearing capacity of the grounds will be considered. On the sites where the ground is not sufficiently stable, additional reinforcement (rabbets, stone columns, rigid insertions or preliminary load + drainage pipes) under the embankment will be used;
- Geosynthetic materials will be used on the slopes of cuts and embankments as per the recommendations provided by the engineering-geological conclusion (See paragraph 5.5.5.4);
- Large-scale earthworks on more complex sites, on Iagluja Plateau, will be accomplished under the supervision of the geological engineer;
- When founding the engineering structures, the engineering-geological properties of the existing grounds will be considered. Bridge piers will be founded below the scouring depth;
- The structures crossing the surface waters are designed to release peak discharges as per the effective standards;
- In order to prevent bogging of local sites, it is necessary:
 - to provide temporary drainage system along the perimeter of embankments and bulk materials by considering local topography and to use small-capacity pumps if necessary; to provide periodic cleaning works with the aim to maintain the conducting capacity of the drainage systems.
 - to place of the fills and materials in the manner as to avoid the bogging of the adjoining areas.
- Diverting rainwaters by bypassing highly sloped and other sensitive sites by using relevant water diversion techniques (channels, pipelines, temporal berms, settling basins);
- Compacting the ground fills properly;
- Limiting or stopping the works with the slopes during the wet weather;
- Recultivating the damaged areas after the completion of the works. In the operation phase, seasonal repairs/cleaning of drainage systems and water pipes is necessary. It is recommended to provide the observation in the project corridor in the initial years of operation (for 2-3 years).

Following the monitoring results, if necessary, additional protection measures must be taken.

7.5 Impact on water environment

The impact on water environment is described in the given paragraph in the following directions:

- Impact on surface and ground water quality;

- Impact on surface water flow;
- Impact on underground water yield;

Changes in the natural drainage conditions of ground waters and surface flow.

7.5.1 Construction phase

The design corridor crosses or comes close some important rivers of East Georgia. These Rivers are: Khrami, Rivers Suli-Kubo, Banocha and Debeda. In addition to them, during the construction works, the dry gullies crossing the highway (mostly, the tributaries of Debeda river along the last section) and the irrigation channels across some areas.

The risks of impact when working near the surface water objects are mostly associated with unforeseen events, such as negligence during the earthworks, improper waste management, spills of products due to the faulty techniques and vehicles, etc. Besides, during the construction of the bridge piers, there is a probability of loose materials getting in the water and increased turbidity. Consequently, during the works on such sites, taking safety measures by the builders is important.

As already mentioned, no crushing plant is planned to provide on the territory of the construction camps. Consequently, no effluent waters will be originated on the camp areas. The inert material, necessary for the project will be supplied from the shops of the Contracting company, which will be located near the extraction site of inert materials. However, the activity implementer will control the contracting companies for the presence of necessary permits and relevant water protection documents agreed with the Ministry.

The sources of waste waters will be equipped with relevant treatment systems. Potential sources of surface water pollution are also the fecal waters that occur on the territories of the construction camps and construction grounds. The domestic and fecal waters will be collected and disposed with special vehicles. Consequently, no discharge of the domestic and fecal waters in the river is planned.

Following the project specifics, no impact on surface waters is expected. No structure crossing the river is planned to provide. No crossing over the rivers are planned. Bridge piers will be provided gradually – the river discharge will be diverted from the construction ground by means of temporary embankments so that the river continuity is maintained without the water current fragmentation. The project does not envisage the construction of tunnels. Therefore, no impact on the deep water-bearing horizons or water exchange regime of the underground waters is expected.

The design corridor runs in East Georgia, across the landscape of a semi-desert type. In this area, the levels of ground waters are not close to the ground surface what is evidenced by the boreholes drilled in the project corridor.

The pollution of ground waters is mainly expected during the earthworks, in particular, when building deep foundations for design bridge piers and other engineering structures. The reason for pollution may be the spills of oil products and their penetration to the deep soil layers. The ground waters are expected to be polluted also due to improper management of domestic and fecal waters and other liquid waste.

During the construction works, earthworks specifically, the impact on drainage and water exchange processes of ground and rain waters is to be considered. The reason for this may be providing cuts and fills in the project corridor what may cause elevation of ground water levels/bogging on local

sites. For this purpose, it is important to efficiently use temporary drainage pipes/channels in the construction process.

Overall, an impact of the construction of the road on the environment may be assessed as medium. The impact will be temporal and reversible. In case the mitigation measures are realized efficiently, the value of impact will be low or insignificant.

7.5.2 Operation phase

As for the operation phase of the Highway, the water pollution risks are associated with: the road repairs and maintenance; spills of various pollutants in case of car accidents and their wash-down into the river/gorge/irrigation channel under the action of the surface runoff.

The pollution during the road repairs may occur in case of careless management of construction materials and waste and failure to comply with the Good Building Practice. This impact will be managed by considering all mitigation measures envisaged for the construction stage. Proper planning of the repairs works near the riverbed or in the river is an efficient means to avoid the possible impact on water/to protect the water environment. At this point, it should also be noted that following the road modernization, the risks of accidents will diminish a lot. Consequently, the probability of the scenario described above to develop will be little.

It should be noted that the highway, all along, will be equipped with relevant drainage systems (See project description sub-chapter) what ensure the relevant drainage of the rain and ground waters and prevention of bogging the slopes adjoining to the alignment.

In the operation phase, the impact on water environment may be considered as low.

7.5.3 Impact mitigation measures

Construction phase

- The priority for the collection of industrial and fecal waters must be given to cesspools and UD toilets. Discharge of the wastewater into the surface waters must be brought to minimum;
- In case of making a decision to discharge the effluent waters in the surface water bodies, in line with the national legislation of Georgia, a project of MAD standards will be developed and agreed with the Ministry of Environment Protection and Agriculture of Georgia before putting the sources of effluent waters to operation;
- Water reserve reservoirs will be provided on the construction camps and consequently grounds in order to use water resources rationally;
- Efficient drainage and stormwater systems will be used on the territories of the camps and construction grounds to avoid impact on the ground water level, bogging local sites and pollution of surface flow;
- Use of non-faulty construction techniques and vehicles;
- The machines/equipment and potentially polluting materials will be placed far from the surface water objects (50 m and more), in the areas protected against the atmospheric precipitations. otherwise, additional protective means will be used to prevent getting the pollutants in the water;
- A fencing will be provided along the perimeter of the oil products supply reservoirs to prevent the propagation of pollutants in case of emergency spills;
- Discharge of any kind of untreated wastewater into the rivers is to be prohibited;
- The surfaces of the storage sites of potential pollutants (oil products) will be provided

- with water impermeable layers;
- In case of spills of oil/lubricants, the spilled product will be localized/cleaned in the shortest possible time;
- The appliances creating the risk of ground water pollution when in operation will be equipped with drip pans;
- The vehicles must be preferably washed at private car washing areas;
- Filling the trenches left after the earthworks shall be in a timely manner;
- The road pavement will be constructed in dry weather;
- During the construction of the bridge, measures to protect the water quality will be taken what mainly means accomplishing earthworks with maximum caution; all processed sites near the bed will have stability maintained to exclude the probability of getting the loose material in water/increasing turbidity;
- During the bridge piers construction, the construction ground located adjacent to the surface object will be isolated from the water current in the rivers with temporary embankments so that the continuous river flow is maintained as far as possible and to avoid its fragmentation;
- After the construction is complete, the temporarily used areas will be recultivated and the sanitary conditions will be restored, and attention will be paid to providing the stability of sides of developed slopes and embankments.

Operation phase

- The repairs of the road pavement will be provided in dry weather to avoid the pollution of surface flow;
- When repairing the damaged road sections, in order to avoid scattering the used material, the works will be duly planned.

7.6 Impact on soil productivity and quality

By considering the specifics of the planned activity, the impact on soil is expected in two directions: on the one hand, violation of the soil, layer stability, deteriorated productivity and resultant loss of cultivation resource is expected, while on the other hand, in case of improper management of used materials, waste management and pollutants (oil products) spills, there is a probability of pollution of surface soils layers. Both impacts are typical for the construction phase. In the operation phase, the probability of pollution will be evident. In the exploitation phase, the issues of negative impact on the surface ground layers must be considered and relevant attention must be paid to taking the relevant mitigation measures to reduce the probability of negative impact on the secondary receptors dependant on the given environmental objects.

7.6.1 Construction works

The major part of the corridor selected to build the Highway will run across the agricultural plots, where the soil cover is quite distinct.

In such areas, the average thickness of the surface humus layers is 20 cm. During the construction works, the highest impact is expected along these sections. Along the section where the corridor will pass across the area of Iagluja Plateau, the ecological value of soil is relatively less: the strength of the humus layer is little and the slope-constituent broken material is mixed with the humus layers

The highest risks of damage and erosion of the topsoil layer will occur during the earthworks and

heavy techniques traffic in the design corridor. As a result of these operations, soil compaction, erosion and deterioration of soil fertility are expected. The most important measure to diminish such impacts is advance topsoil stripping in the working zone and proper storage before its future use. By considering the length and average width of the highway and average strength of a humus layer, an approximate volume of the soil to strip is possible to determine:

- along the sections running across the agricultural plots:
 - o Approximate length of the corridor (L) – 20000 m;
 - o Average width of the corridor (W) – 45m;
 - o Average strength of humus layer (H) - 0,2m;
 - o Coefficient (K) considering the presence fo various communications in the corridor (roads, irrigation channels, other areas lacking humus) –0.7.

Approximate volume of the humus layer to strip is:

$$20000 \times 45 \times 0,2 \times 0,7 = 126000 \text{ m}^3;$$

- along the sections running across Iagluja Plateau:
 - o Approximate length of the corridor (L) – 9000 m;
 - o Average width of the corridor (W) – 45m;
 - o Average strength of humus layer (H) - 0,1m;
 - o Coefficient (K) considering the presence fo various communications in the corridor (local roads, irrigation channels, other areas lacking humus) –0.6.

$$9000 \times 45 \times 0,1 \times 0,6 = 24300 \text{ m}^3;$$

- In the areas where the existing road is planned to widen, on bridge sites and other locations: $\approx 2\text{-}5$ thousand m^3 .

Overall, the total volume to the fertile layer to strip will be 155 thousand m^3 .

The stripped topsoil cover will be stored on the sites selected in advance, with the maximum protection against the water and wind impacts. After the works are over, the topsoil will be used for the recultivation works along the roadsides (mostly in spoil grounds). The guiding document in the process of stripping, storing and using the topsoil is Technical Regulation - "Topsoil Removal, Storage, Use and Cultivation", approved by the decree №424 of the Government of Georgia.

The risks of qualitative deterioration of soil are associated with unforeseen events (e.g. spills/leakages of oil products from the techniques and/or vehicles operating in the project zone, supply reservoirs or other plants and mechanisms; improper handling of hazardous substances or their spills; improper management of the topsoil stripped during the construction; improper wastewater management, etc.).

All in all, the risks of impact on the fertility and qualitative properties of soil can be estimated as average or high. The value of the residual impact will depend on the success of accomplishing the environmental management plan. In case of its successful implementation, mainly meaning the relevant management of the stripped topsoil, the rating of the final (residual) impact will be insignificant.

7.6.2 Operation phase

As for the exploitation phase, destruction of the topsoil or its instability is less expected. The project highway, all along, will be equipped with relevant roadside drainage systems (See Project

Description sub-chapter) what will reduce the probability of developing erosive processes in the roadside zone.

Road exploitation is usually associated with the soil pollution along the roadside with heavy metals. Another reason for pollution may be the garbage along the roadside. During the activity, it is difficult to management the given types of measures as the cause of impact is mainly the passengers travelling along the road.

7.6.3 Mitigation measures

Construction phase

One of the environmental commitments of the building contractor during the implementation of earth works will be minimal impact on the fertile soil layer. In addition, erosion and damage of soil should be prevented and measures should be taken to maintain the quality of soil fertility, in particular:

- Routes determined for transport and equipment must be protected;
- Topsoil should be removed and disposed separately from other materials, on pre-selected areas protected from surface runoff
- Temporary water drain channels should be arranged on the perimeter of bulk soil;
- In case of long-term storage of topsoil, its maintenance shall be considered. Periodic loosening and grass sowing is meant under this clause;
- After completion of the construction works, pre-excavated topsoil shall be used for restoration of the damaged areas and improve productivity;
- In order to avoid soil contamination, sound construction equipment shall be used;
- The fuel tank should be placed in areas protected by berms and embankments in order to prevent spills in case of necessity;
- The impermeability of industrial-fecal waters cesspits will be ensured; the cesspits will be emptied before they are full;
- Spill should be immediately contained and cleaned up from absorbent material;
- Accidentally contaminated ground / soil shall be removed and disposed as soon as possible;
- After the completion of the construction works, recultivation of the area and restoration of sanitary conditions will reduce the probability of impact on soil quality and stability. The recultivation works will be done mainly in the roadside zone (embankments and cutting slopes) and spoil grounds.

Operation phase

- Good maintenance of drainage system is instrumental in avoiding erosion and degradation of soil to minimize the development of erosion processes caused by rain waters in the roadside zone.

7.7 Impact on biological environment

As a result of the project implementation, an impact on the biological environment is expected in some directions, in particular:

- Loss and fragmentation of habitats;
- Impact on flora and vegetation cover during the cleaning works of the project area and earthworks;

- Direct and indirect impact on fauna, including fish fauna and impact on their habitats during the works near the water object;

As already mentioned, by considering the far distance, no impact on protected areas is expected.

7.7.1 Loss and fragmentation of habitats

7.7.1.1 Construction Phase

The evaluation of the impact caused by the loss of habitats as a result of the highway construction must consider the types and values of habitats in the project corridor as well as the area of the corridor to be used within the scope of the project. As it was mentioned in the introductory part of the baseline conditions, the project corridor runs across three types of sections:

1. Agricultural plots habitat;
2. Degraded floodplain-like habitats present on the sites of objects crossing the water objects.

None of them are a habitat of high value. Their natural structure is quite changed under the intense economic activity of people.

By considering the length and width of the project highway and area to use, the loss of habitats can be assessed quantitatively in approximate terms. For comparison, we can use monograph “Spatial-time analysis of Georgian landscapes” giving the total areas of similar habitats in Georgia (See Paragraph 5.2.). The quantitative assessment of impact caused by the loss of habitats is given in Table 7.6.1.1.1.

According to the table data, a landscape of low and less average value will be under the impact, whose quantitative loss will be insignificant. In the final run, the impact caused by the loss of habitats may be assessed as low. For the habitat compensation, the project does not need the restoration of similar habitats or other significant mitigation measures.

Table 7.7.1.1.1. Impact caused by the loss of habitats as a result of the the project highway construction

Type of habitat	Highway section, which will run across the relevant type of habitat			Approximate loss of habitat, ha	Total area of a similar habitat in Georgia according to monograph "Spatial-time analysis of Georgian landscapes", ha	Percentage loss of habitat, %
	Approximate length, m	Average width, m	Area of the corridor to use to construct the highway, m ²			
Habitat 1 – a habitat of an agricultural plots type. Value: Low	25000	45	1125000	112,5	165500	0,068%
Habitat 2 – Degraded floodplain habitat found at the crossing points with the water objects . Value: mostly low	Not more than 1000	45	45000	4,5	154000	0.003%

Besides the habitat loss, the habitats in some areas will be changed. Such an impact is expected in the affected areas, where there is no need for permanent use of habitats. Rather, they will be used on a temporary basis e.g. to provide construction camps or spoil grounds. It should be noted that the sites selected for temporal infrastructure will not occupy large areas and they are similar habitats of a low value. After the completion of the construction works, such areas are planned to recultivate and restore to their initial state. As there are mainly weeds growing in the project area and the works do not need cutting large amounts of trees and vegetation cover, the risk of penetration of invasive or advent plant species in the project area or weeding is not high.

As for the probability of the habitat fragmentation, the areas with similar structures are spread on the both sides of the alignment to use. The construction corridor will not cross a forested area and does not separate the habitats of different types. Besides, the project area is not an important migration route for land animals. Therefore, during the construction works, the habitat fragmentation will not be significant.

7.7.1.2 Operation phase

In the operation phase of the highway, no additional impact on the local habitats is expected. At the given stage of the works, the probability of habitat fragmentation caused by the road bed (embankments, cuttings) is more important. As a result of such fragmentation, there will be certain barrier created for some animal species to move across vast areas to find food or breed. At proper locations, the project envisages providing box culverts under the roadbed to take animals from one side of the highway onto another.

7.7.1.3 Impact mitigation measures

As already mentioned, the project is planned to realize in the area of mainly low-value habitats. Consequently, there is no need for significant compensation measures. The borders of the corridor to use are important to observe during the construction works as well as traveling area for techniques and vehicles.

In the operation phase, underpasses are planned to provide at relevant locations under the roadbed (see paragraph 4.6.).

7.7.2 Impact on vegetation cover

7.7.2.1 Construction phase

During the construction of the project highway, both, direct and indirect impacts on the vegetation cover and flora are expected.

Direct impact is the clearing the road ROW off the vegetation cover. In this respect, it should be noted that the project corridor does not cross naturally forested/forests funs areas. Mainly Xerophilous bushes, ephemers and annual plants will be under the impact. As for the timber plants, they will be less subject to the project impact. Mainly artificially grown species provided wind-break belts and cultural trees will be damaged, including White Poplar (*Populus pyramidalis*), Aspen (*Populus alba*), Cherry plum (*Prunus divaricata*), Mulberry (*Morus alba*), etc. The botanical study revealed two Red-Listed species: Walnut tree (*Juglans regia L*) and Iguana hackberry (*Celtis glabrata*); however, as the taxation results suggest, they will not be subject to impact.

An indirect impact on the vegetation cover is also expected, e.g. pollution of the adjoining area with construction materials, soil damage/compaction during the construction works, spills of oil products, emissions of harmful substances in the atmospheric air. However, following the low sensitivity of the species growing in the corridor, the impact on any of them will not be significant.

In the final run, the vegetation cover in the project area, in respect of both, species and quantity, is not of a high value. Mostly, cultural or artificially grown species and those of a secondary type will be subject to the direct impact. No significant mitigation or compensation measures will be necessary for the floristic environment. During the preparation of the corridor, the project borders to prevent any excess damage to the plants will be observed. The vegetation cover cleaning works will be agreed with the relevant bodies.

7.7.2.2 Operation phase

In the operation phase of the road, the risks of damage of the vegetation cover is minimal. Possible indirect impact may be associated with the dust and exhaust fumes as a result of the vehicle traffic and pollution with surface effluent. The pollutants from the road pavement may have an impact on the development of the green cover.

7.7.2.3 Impact mitigation measures

Construction phase

- Observing the borders of the project corridor to prevent additional damage to plants;
- Delisting the protected species from the environment will be done in line with the requirements of sub-clause f) of clause 1 of article 24 of Georgian Law “On the Red list and Red book of Georgia”, in agreement with the Ministry of Environment Protection and Agriculture of Georgia.

Operation phase

Direct impact on flora is not expected in the highway operation phase. Indirect impact may be associated with the dust and exhaust fumes as a result of the vehicle traffic and pollution with surface effluent. The pollutants from the road pavement may have an impact on the development of the green cover and soil organisms. During the repairs, the requirements specified for the construction phase will be observed (Mitigation measures).

7.7.3 Direct and indirect impact on fauna

7.7.3.1 Operation phase

As a result of Algeti-Sadakhlo highway construction, both, direct and indirect impacts on fauna are expected.

During the construction works, the source of direct impact is earthworks and harm and death of animals due to various activities (e.g. vehicle accident, falling in trenches, etc.). As a result of the earthworks, habitats may be destroyed (nests, holes, burrows). Reduction of the vegetation cover will also have an impact on the feeding base. The impact will mainly affect: small mammals – various rodents, passerines as well as reptiles (among which the Georgian Red-Listed species Mediterranean tortoise (*Testudo graeca*) is worthwhile. For large mammals, the project area is not very attractive and consequently, they will be less subject to the impact.

Worthwhile indirect impacts are:

- Emission of noise, dust and combustion products, as well as human intensive activities will cause animal disturbance and migration to other places;
- Unsystematic spread of waste, improper management of waste (change in environmental quality indicators) will cause a further deterioration of the living conditions of terrestrial and aquatic animals; There will be also lethal cases.
- Night lighting systems at construction camps may cause disturbance of animals and disorientation of birds;
- Cases poaching are also possible by the personnel.

In respect of impact on fish fauna, the sections of the project corridor crossing big rivers or running near them (Rivers Debeda, Khrami) are noteworthy. As already mentioned, the project does not envisage fragmentation of river currents or providing barriers within them what could cause the fragmentation of habitats of fish fauna. However, indirect impact is expected associated with the increased water turbidity near the beds (when constructing piers) and getting various pollutants in water. Flowing of discharge waters from the construction camps into the river and insignificant propagation of pollutants from the construction operations may be attributed to temporary impacts on water habitats and species. Consequently, in respect of protection of fish fauna and water habitats, the mitigation measures to maintain surface water quality are very important.

In the final run, the negative impact on fauna species is expected in several directions. However, reduction of any species what may affect their conservation status is not expected. Despite this, the construction works must be accomplished by taking relevant mitigation measures, while the recultivation works after the completion of the construction will alleviate the impact to a certain degree. After the completion of the construction works, certain types of impact sources (construction camp, techniques, construction personnel) will not exist what will support certain species to return to their original habitats.

7.7.3.2 Operation phase

After putting the highway to operation, some sources of direct and indirect impacts on fauna (e.g. earthworks and construction works, camps, etc.) will not exist. However, the traffic intensity will increase. Consequently, the risks of collision of the vehicles with animals and noise propagation will also increase. In this respect, the relevant mitigation measures will be considered.

As already mentioned, the risks of fragmentation are diminished by the project solution envisaging underground passages on many sites.

7.7.3.3 Impact Mitigation Measures

Construction Phase

- Protection of working borders to prevent excess damage of vegetation cover;
- Inspection of project corridors (specified) on the preparation stage and reveal animals inhabiting zones (nests, holes) within the corridors
- Restriction of speeds of machinery and transport;
- Fencing of holes and trenches with sharp color things in order to avoid falling of animals in them;
- Filling of holes and trenches in limited terms. Before launching filling works holes should be checked probability of being animals in them should be excluded;
- Arrangement of small boards on trenches to provide artificial crossings for small animals;
- Minimum usage of light on the construction camps.
- Proper management of wastes;
- Implementation mitigation measures of noise propagation, emission of harmful substances and water contamination;
- Providing instruction for the personnel about importance of species and establish fines against poaching;
- Accomplishing recultivation works after the completion of the construction works.

Besides the above-mentioned, below we give the summary table giving the following data for animal species typical to the project area (including species protected by the Berne Convention and Red List of Georgia):

- Expected impact of the project implementation;
- Source of impact;
- Expected impact area;
- Planned mitigation and compensation measures;
- Period of taking mitigation and compensation measures.
- The mitigation measures for the impact on biodiversity will be carried out by the Construction Contractor in line with the infrastructure given in the table what in the final run, will ensure reducing the expected impact on biodiversity as a result of project implementation.

Operation phase:

- In order to reduce impact caused by habitat fragmentation, arrangement of crossings (passages) under the road should be considered;
- Regular collection of wastes accumulated along the road;
- During the maintenance works (repairs) of the highway, all mitigation measures should be considered (developed for the construction phase), which will reduce emission of harmful substances and water pollution.

7.7.4 Potential Impacts of Climate Change Upon the Project

Components at Low- and Moderate-Risk from Climate Impacts

Bridges

By 2050, precipitation is expected to decrease by 4.5%, and by 2100, it will decrease by 13%. At the same time, extreme rainfall events are projected to become more frequent and intense. This may lead to increased scouring and riverbank erosion. In addition, the bridge deck drainage capacity may be overwhelmed and create unsafe driving conditions.

By 2100, annual river runoff may decrease by about 13%, and normal water levels in the river channels may be lower by as much as -1.1 m. Water level and flow fluctuations may lead to changes in sub-surface conditions that could affect foundation settlement and pier bearing capacity.

By 2050, summer (July – September) temperatures are projected to increase by up to 4.5°C, and the number of consecutive hot days (i.e., days with maximum temperature over 25°C, and days with daily minimum temperatures over 20°C) will become more frequent, which may impact bridge structure and bridge deck paving material.

The expected changes in temperatures will stress the bridge deck paving material, which is expected to be a BM. The increase in maximum air temperatures may soften the BM, and the likelihood of shorter winters will reduce the service life of the BM mixture due to abrasion and wear.

In addition, an increase in the number, duration and extent of wildfires in the surrounding vegetated and forested areas is expected. The ambient heat generated from these may also affect bridge structures and materials, bridge deck conditions, and may also create unsafe driving conditions.

Cut Sections

By 2050, precipitation is expected to decrease by 4.5%, and by 2100, it will decrease by 13%. At the same time, extreme rainfall events are projected to become more frequent and intense. Changes to ground water levels and flows may also lead to changes in sub-surface conditions.

By 2050, summer (July – September) temperatures are projected to increase by up to 4.5°C, and the number of consecutive hot days (i.e., days with maximum temperature over 25°C, and days with daily minimum temperatures over 20°C) will become more frequent, which will lead to an increase in the number, duration and extent of wildfires in the surrounding vegetated and forested areas.

An increase in droughty conditions combined with more frequent extreme rainfall events will increase risk of flash floods, mudflows and landslides on the surrounding slopes. An increase in debris flows and drainage obstructions is likely.

Surface Water Management

By 2050, precipitation is expected to decrease by 4.5%, and by 2100, it will decrease by 13%. At the same time, extreme rainfall events are projected to become more frequent and intense. Intense and long-duration rainfall can be regarded as the most critical loading condition. The frequency of such events is projected to increase, which may create loads that exceed the original design parameters.

By 2100, annual river runoff may decrease by about 13%, and normal water levels in the river channels may be lower by as much as -1.1 m. In addition, an increase in the number, duration and extent of wildfires in the surrounding vegetated and forested areas is expected. This will likely increase the debris load near drainage channels and openings. Because of changing climatic conditions, projected debris loads, changing land use patterns, and uncertainties in hydrologic estimates, culvert size and capacity should be expansive.

An increase in droughty conditions combined with more frequent extreme rainfall events will increase risk of flash floods, mudflows and landslides on the surrounding slopes. An increase in debris flows and drainage obstructions is likely.

Components at Low-Risk from Climate Impacts

Road Surface

Nearly all climate parameters affect the road surface. Even under normal climate change conditions, rigid pavements suffer from thermal-expansion stresses.

Thermal-expansion stresses, such as scaling, D-cracking, pumping, faulting, curling, corner cracking and 'punch-outs, are the primary concern due to air temperatures, including absolute yearly maximal and the number of heat days. Curling deformation, resulting in thermal-expansion stresses in the concrete slab, is a characteristic phenomenon under environmental and repeated vehicle loads. Distortion of the slab, due to both upward and downward curling, may occur when the top surface of the slab is cooler than the base course, and also when there is a higher temperature on the top surface, leading to separation of the base course from the concrete. Distress of the pavement in the form of joint deterioration, or cracking, also contributes to void formation by allowing moisture infiltration. The combination of distress and layer voids will further reduce the pavement load carrying capacity. Changes in the capacity of the base course, or subgrade, as a second-order response may also add new stresses to the road surface.

While an overall increase in temperature is projected, these are not expected to severely impact the road surface since the projected temperatures are within the German Pavement Design Guideline (RStO 12) reference temperature range (-20°–50°C) used in the pavement design.

The increase in the number of consecutive hot days (i.e., days with maximum temperature over 25°C, and days with daily minimum temperatures over 20°C), and the increase in the number, duration and extent of wildfires on the surrounding slopes, may require second level responses.

Interchanges and Access Roads

The majority of climate parameters affect asphalt surfaces, though the increase in the number of hot days and nights is of particular concern. As asphalt surfaces have a short design life and can be replaced relatively easily, they are not considered a medium- or high-risk component. Changes in air and ground temperatures may also affect the subgrade of the approach and connecting roads, but not to an extent that would result in medium- or high-risk component.

Road Embankment and Road Base

Most climate events affect the road embankment to some degree. The climate load includes changing ground water levels, that can induce consolidation settlement; ground temperature; ground water regimes; snow cover; and surface vegetation that can reduce their service life. By 2050, precipitation is expected to decrease by 4.5%, and by 2100, it will decrease by 13%. Increasing temperatures and changes in precipitation patterns may impact ground and surface water flows, leading to consolidation settlement.

By 2050, summer (July – September) temperatures are projected to increase by up to 4.5°C, and the number of consecutive hot days (i.e., days with maximum temperature over 25°C, and days with daily minimum temperatures over 20°C) will become more frequent, may accelerate soil warming, and in some soil types, creating soil heave.

In contrast to the road embankment, the road base is not directly exposed to the atmosphere, and therefore is less impacted by short-term climate events. Changes in the road base capacity would

mostly result from loss in strength or formation of voids due to internal erosion, especially if the road surface is cracked.

Changes in surface and ground water levels and their impact on the road base and the road embankment, as a second-order response to changes in precipitation levels are difficult to predict, but should be considered.

Management & Mitigation Actions

A number of recommendations were made as part of the climate risk assessment. The following table provides those recommendations along with the responses of the Detailed Design Consultant.

Table 7.7.4.1: Climate Change Recommendations and Responses

Recommendation	Detailed Design Consultant Reply
Bridges	
A review of the bridge pier design parameters in light of the potential changes in in soil conditions, with implications for foundation settlement.	All piers are designed in order to avoid settlements on the long run and plinths are generally in the floodplain. Plinths in the flowing section of the river, whenever unavoidable, are founded on piles and with the upper face below the riverbed level, as per best practice; the risk of foundations being exposed is consequently minimum. Intervention of protection of the plinths in the floodplain in case of future river bed changes is quite simple and not expensive, so we suggest to monitor this aspect and act accordingly just in case. Recommendations for the Employer will be included in the "Monitoring Action Plan - Operation Phase" document, in order to give an instrument of monitoring and managing the maintenance.
The recurrence interval for the bridge drainage system should be upgraded to a 50-year recurrence interval, and the drainage calculations revisited, to ensure concurrency with the other elements of the drainage system.	50 years return period is used as clearly stated in the design documents.
Cut Sections	
A decrease in the cut slope gradient, and a concurrent increase in the overall slope buffer area, is recommended.	The choice of the cut slope is a compromise between the geotechnical constraints and the occupation of land. Reducing the slope of the cuts in many cases will cause larger road footprint (often more than a hundred meters), which would not acceptable for its landscaping and resettlement impacts and for the volumes of spoil material generated. In any case the geotechnical verification (not present in the draft) have been carried out with conservative safety coefficient.
Increased use of hydro seeding on all the cut slopes, not just their upper most area, is recommended.	The steepness of the slope (almost vertical) and the presence of rock don't allow the use of hydro seeding. This would more be the case of a "vertical garden", which is not a technology practiced in Georgia. That's why the designer's choice was the more industrial, but effective steel net protection.
Surface Water Management Structures	
A consistent 50-year recurrence interval for the road drainage system should be used throughout the design,	50 years return period is used as clearly stated in the design documents.

Recommendation	Detailed Design Consultant Reply
and all design calculations reviewed.	
Assumptions and calculations for areas with high degree of mass movement and high potential for channel obstruction should be explicitly integrated into the drainage system design.	Mass movements are mostly unpredictable, as well as the yearly amount of debris flow. We only can suggest to the Employer to monitor these phenomena and to act accordingly, in case of event. Monitor of mass movement will be included in the "Monitoring Plan – Operation Phase" document.
Use of box culverts, which are better at managing debris flows and related obstructions than pipe-based systems, is recommended.	Further, given that a design solution with external ditches has been chosen for both embankment/fill and cut section, the motorway platform always lies higher than external ditches, so that drainage pipes are not expected to convey significant debris flow.

Hydrology

Potential Impacts

The following potential impacts to hydrological conditions exist within the Project corridor:

- Drainage & Flooding - Inadequate assessment of the hydrological conditions in the Project Area and poor design could result in damage to Project structures, including bridges and culverts. This in turn would result in several impacts including cost to rebuild the structures, potential flooding of agricultural land and property and impacts to surface water quality.
- Construction Camps – Improper siting and design of construction camps can have negative impacts to hydrology, both surface and groundwater, through improper disposal of liquid waste and spills of hazardous liquids.

The span of the bridges is designed to avoid, as far as possible, the presence of foundation piles in the riverbed. That said, it is important to point out that the intervention is located in a complicated orography (a narrow valley with a central stream) and that the geometric standards of the route have imposed strong constraints that oblige to pass over the river, to have no greater environmental impact on forests or populated areas.

Management & Mitigation Actions

Drainage and Flooding - Consideration in the design phase has been given to the issue of drainage and culverts to ensure that drainage patterns are improved from the existing conditions and that increased run-off does not occur or result in flooding of areas previously undisturbed. During design, all drainage works have been designed based on the historical flood data and flood forecasting. A design discharge of 50 years return period is considered for culverts, and 100 years of bridges.

Bridges - All bridges will be designed for the life expectancy of 100 years. The design loading and design of all structural components will conform to the bridge design standards provided in the Employer's Special Requirements. Bridge designs will ensure that drainage from bridge decks over 50 meters does not discharge directly to the watercourses beneath the bridges. The bridges shall be designed with dry paths under the bridge on either side of the streams to facilitate movements of people, livestock and wildlife, the latter primarily at night when people are not around.

During the operational phase of the Project, the RD will be responsible for monitoring drainage along the road to ensure that it does not result in increased run-off and flooding. The RD will be responsible for rectifying this issue if it occurs.

Table 7.7.4.2. Summary table of impact on biodiversity and mitigation measures for different species

<i>Impact receptor</i>	<i>Description of impact</i>	<i>Sources of impact</i>	<i>Impact area</i>	<i>Mitigation measures</i>	<i>Period</i>
<i>Jackal (Canis aureus), red fox (Vulpes vulpes) and other small predator mammals</i>	<i>Direct impact:</i> <ul style="list-style-type: none"> • <i>Damage to the habitats (holes) during the earthworks;</i> • <i>Vehicle collision, falling in the trenches and getting harmed.</i> 	<ul style="list-style-type: none"> • <i>Clearing the project corridor off the vegetation cover;</i> • <i>Earthworks ;</i> • <i>Transportation operations.</i> 	<i>The sections of the project corridor under less anthropogenic impact</i>	<ul style="list-style-type: none"> • <i>Preliminary layout of the working zone;</i> 	<i>Before the commencement of works</i>
				<ul style="list-style-type: none"> • <i>Observing the borders of the working zone to avoid damage to additional areas;</i> 	<i>During the works</i>
				<ul style="list-style-type: none"> • <i>Adhering to the driving routes and speed limits of vehicles;</i> 	<i>During the transportation operations</i>
				<ul style="list-style-type: none"> • <i>Bordering holes, trenches the like elements with barriers to protect animals against falling in them, e.g. with a bright-color tape or plain material</i> • <i>Placing planks in the holes and trenches to help the fallen animals get out of them;</i> 	<i>During the earthworks</i>
				<ul style="list-style-type: none"> • <i>Thorough examination of holes and trenches;</i> 	<i>Before filling in trenches and holes</i>
				<ul style="list-style-type: none"> • <i>Taking recultivation measures, including topsoil restoration</i> 	<i>After completion of works</i>
<i>Bats, including those protected by the Bern Convention: Western barbastelle (Barbastella barbastellus), Lesser</i>	<i>Indirect impact:</i> <ul style="list-style-type: none"> • <i>Disturbance and migration to other territories because of noise propagation or other anthropogenic factors;</i> • <i>Impact on less mammals, on their food base in particular;</i> • <i>Poaching.</i> 	<ul style="list-style-type: none"> • <i>Noise caused by construction works;</i> • <i>Works, concrete works, use of various polluting materials, waste;</i> • <i>Poaching by the personnel</i> 	<i>The sections of the project corridor under less anthropogenic impact</i>	<ul style="list-style-type: none"> • <i>Taking the mitigation measures specified by the EIA Report;</i> 	<i>during the works, the earthworks in the first instance</i>
				<ul style="list-style-type: none"> • <i>Plant protection from impact;</i> • <i>Protection of the environment from pollution;</i> 	<i>Permanently, during the works</i>
				<ul style="list-style-type: none"> • <i>Giving the explanation to the personnel regarding the importance of species and sanction sin case of unfair behavior;</i> 	<i>Providing training before the commencement of works</i>
<i>Bats, including those protected by the Bern Convention: Western barbastelle (Barbastella barbastellus), Lesser</i>	<i>The study did not identify colonies or habitats of this species (hollows, caves). The main types of expected direct impact:</i> <ul style="list-style-type: none"> • <i>Disturbance and migration</i> 	<ul style="list-style-type: none"> • <i>Dust caused by construction works;</i> 	<i>Project corridor, particularly old buildings and premises where bats may live;</i>	<ul style="list-style-type: none"> • <i>Taking the mitigation measures specified by the EIA Report;</i> 	<i>during the works, the earthworks in the first instance</i>
				<ul style="list-style-type: none"> • <i>Giving the explanation to the personnel regarding the importance of species and sanction sin case of unfair behavior;</i> 	<i>Providing training before the commencement of</i>

<p><i>mouse-eared bat (Myotis blythii)</i> <i>And Lesser horseshoe bat (Rhinolophus hipposideros)</i></p>	<p><i>to other territories because of noise propagation or other anthropogenic factors;</i></p>				
<p><i>Different species of small land mammals, mostly rodents,</i></p>	<p><i>Direct impact</i></p> <ul style="list-style-type: none"> • <i>Possibility of damage of places of habitation (burrows) during the construction of the roadbed as a result of tree felling, clearing the grass cover, earthworks and cutting the slopes;</i> • <i>Vehicle collision, falling in the trenches and getting harmed.</i> 	<ul style="list-style-type: none"> • <i>Clearing the project corridor off the vegetation cover;</i> • <i>Earthworks ;</i> • <i>Transportation operations.</i> 	<p><i>All along the project road; along the spoil grounds perimeter</i></p>	<ul style="list-style-type: none"> • <i>Preliminary layout of the working zone;</i> • <i>Observing the borders of the working zone to avoid damage to additional areas;</i> • <i>Adhering to the driving routes of vehicles;</i> • <i>Thorough examination of the affected territories in advance to identify the concentration sites of small animals locally;</i> • <i>Bordering holes, trenches the like elements with barriers to protect animals against falling in them , e.g. with tin, polyethylene, etc.</i> • <i>Placing planks in the holes and trenches to help the fallen animals get out of them;</i> • <i>Thorough examination of holes and trenches ;</i> • <i>Taking recultivation measures, including topsoil restoration.</i> 	<p><i>Before the commencement of works</i></p> <p><i>During the works</i></p> <p><i>During the transportation operations</i></p> <p><i>On each construction around before the commencement of the works</i></p> <p><i>During the earthworks</i></p> <p><i>Before filling in trenches and holes</i></p> <p><i>After completion of works</i></p>
	<p><i>Indirect impact:</i></p> <ul style="list-style-type: none"> • <i>Disturbance and migration to other territories because of noise propagation or other anthropogenic factors;</i> 	<ul style="list-style-type: none"> • <i>Dust caused by construction works;</i> • <i>Works, concrete works, use of various polluting materials, waste;</i> 	<p><i>All along the project road</i></p>	<ul style="list-style-type: none"> • <i>Taking noise mitigation measures;</i> • <i>Protecting plants against excess impact;</i> • <i>Protection of the environment from pollution;</i> 	<p><i>during the works, the earthworks in the first instance</i></p> <p><i>Permanently, during the works</i></p>

	<ul style="list-style-type: none"> • <i>Reduced food base as a result of vegetation clearing;</i> • <i>Pollution of soil and water environment;</i> • <i>Vandalism of the personnel.</i> 	<ul style="list-style-type: none"> • <i>Poaching by the personnel</i> 		<ul style="list-style-type: none"> • <i>Giving the explanation to the personnel regarding the importance of species and sanction sin case of unfair behavior;</i> 	<i>Providing training before the commencement of works</i>
Birds:					
Bigger predator birds	<p>No habitations sites of such species were identified in the corridor. Consequently, no direct impact on them is expected. However, it is not excluded for them to get temporarily in the impact area and their disturbance. <i>Indirect impact:</i></p> <ul style="list-style-type: none"> • <i>Disturbance and migration to other territories because of noise propagation or other anthropogenic factors;</i> • <i>Impact on the food base habitats small mammals/reptiles;</i> • <i>Poaching.</i> 	<ul style="list-style-type: none"> • <i>Dust caused by construction works;</i> • <i>Poaching by the personnel.</i> 	<i>All along the project corridor</i>	<ul style="list-style-type: none"> • <i>Taking the mitigation measures specified by the EIA Report;</i> 	<i>during the works, the earthworks in the first instance</i>
				<ul style="list-style-type: none"> • <i>Protection of small mammals, reptiles and amphibians against the impact;</i> 	<i>For the whole project cycle</i>
				<ul style="list-style-type: none"> • <i>Giving the explanation to the personnel regarding the importance of species and sanction sin case of unfair behavior.</i> 	<i>Providing training before the commencement of works</i>
Small birds	<i>Direct impact: Possibility of damage of habitation sites (nests) due to tree felling, grass cover clearing, earthworks and slope cutting;</i>	<ul style="list-style-type: none"> • <i>Clearing the project corridor off the vegetation cover;</i> • <i>Earthworks.</i> 	<i>All along the project road</i>	<ul style="list-style-type: none"> • <i>Preliminary layout of the working zone;</i> 	<i>Before the commencement of works</i>
				<ul style="list-style-type: none"> • <i>Observing the borders of the working zone to avoid damage to additional areas;</i> 	<i>During the works</i>
				<ul style="list-style-type: none"> • <i>Thorough examination of the affected territories in advance to identify bird nests and other shelters;</i> 	<i>On each construction around before the commencement of the works</i>
				<ul style="list-style-type: none"> • <i>The personnel must be instructed against killing fauna species. Rather, they must be given an escape route from the area during the works. At least, their disturbance must</i> 	<i>For the whole project cycle, particularly before starting the corridor clearance</i>

				be limited to giving them a corridor to escape.	<i>works and earthworks</i>
				<ul style="list-style-type: none"> • Forbidding any kind of impact on the trees with functioning bird nests in them from April to July. 	<i>from April to July</i>
				<ul style="list-style-type: none"> • Taking recultivation measures, including topsoil restoration 	<i>After completion of works</i>
	<p><i>Indirect impact:</i></p> <ul style="list-style-type: none"> • Disturbance and migration to other territories because of noise propagation or other anthropogenic factors; • Reduced food base as a result of vegetation clearing; • Environmental pollution; • Poaching and vandalism of the personnel. 	<ul style="list-style-type: none"> • Dust caused by construction works; • Poaching and vandalism of the personnel 	<i>All along the project road</i>	<ul style="list-style-type: none"> • Taking noise mitigation measures; 	<i>during the works, the earthworks in the first instance</i>
				<ul style="list-style-type: none"> • Protection of trees and vegetation cover against impact; 	<i>For the whole project cycle</i>
				<ul style="list-style-type: none"> • Giving the explanation to the personnel regarding the importance of species and sanction in case of unfair behavior; 	<i>Providing training before the commencement of works</i>
Reptiles					
<p><i>Different reptile species (their potential habitats are the areas covered with tall herbaceous plants), including Red-Listed species: Mediterranean tortoise (Testudo graeca)</i></p>	<p><i>Direct impact Damage of attractive shelters; direct impact due to vehicle collision, falling in trenches or other reasons.</i></p> <p><i>Indirect impact:</i></p> <ul style="list-style-type: none"> • Disturbance and migration to other territories because of noise propagation or other anthropogenic factors; • Poaching/vandalism of the personnel 	<ul style="list-style-type: none"> • Clearing the project corridor off the vegetation cover; • Earthworks • Transportation operations; • Poaching by the personnel. 	<p><i>All along the project corridor, particularly the area covered with tall herbaceous plants and areas adjacent to river banks/drain channels.</i></p>	<ul style="list-style-type: none"> • Preliminary layout of the working zone; 	<i>Before the commencement of works</i>
				<ul style="list-style-type: none"> • The supervisors of the personnel employed for the construction works must be informed about the visual characteristics and behavior of tortoises; 	<i>Before the commencement of works</i>
				<p>The personnel must be instructed against killing such species or exerting some other kind of direct impact on them. Rather, they must be given an escape route from the area during the works. At least, their disturbance must be limited to giving them a corridor to escape. If an animal gets stuck on the construction site by chance, the workers must find the way for it to escape the area without being damaged.</p>	<i>Before the commencement of works and During the works</i>
				<ul style="list-style-type: none"> • Observing the borders of the working zone to avoid damage to additional areas; 	<i>During the works</i>

				<ul style="list-style-type: none"> • Thorough visualization of the perimeter of the area to treat (particularly the areas covered with grass) to identify individual tortoises or their habitation sites; 	During the works
				<ul style="list-style-type: none"> • In case of identifying this species, if it cannot leave the impact area, a similar habitat must be identified beyond the perimeter of the project corridor and tortoises must be set free in the nature; 	In case of identifying the given species
				<ul style="list-style-type: none"> • Thorough examination of holes and trenches; 	Before filling in trenches and holes
				<ul style="list-style-type: none"> • Protection of the environment from pollution; 	Permanently, during the works
				<ul style="list-style-type: none"> • Taking recultivation measures, including topsoil restoration. 	After completion of works
Amphibians and water biodiversity					
<i>Amphibians</i>	<i>Direct impact – Damage of the sites attractive for amphibians (small ponds, river bank area); Indirect impact – Pollution of water and soil environment.</i>	<ul style="list-style-type: none"> • Earthworks, concrete works, various uses of polluting materials, waste; 	<i>All along the project road, particularly near the water bodies.</i>	<ul style="list-style-type: none"> • Preliminary layout of the working zone; 	<i>Before the commencement of works</i>
				<ul style="list-style-type: none"> • Observing the borders of the working zone to avoid damage to additional areas; 	<i>During the works</i>
				<ul style="list-style-type: none"> • Preserving the ponds formed in the vehicle tire traces in the road during the propagation period of amphibians as long as possible. Before damaging such spots, the animals must be given an escape corridor. 	<i>During the earthworks, particularly in spring</i>
				<ul style="list-style-type: none"> • Thorough examination of holes and trenches; 	<i>Before filling in trenches and holes</i>
				<ul style="list-style-type: none"> • Protection of the environment from pollution; 	<i>Permanently, during the works</i>
				<ul style="list-style-type: none"> • Taking recultivation measures, including topsoil restoration. 	<i>After completion of works</i>
<i>Fish and living water organisms</i>	<i>Direct impact - not expected Indirect impact - in case of risks of water quality deterioration, improper waste management or activation of</i>	<ul style="list-style-type: none"> • Earthworks and works to accomplish in the river bank area; • Construction of bridge piers; 	<ul style="list-style-type: none"> • All along the project corridor, at the crossing points with rivers (construction grounds of bridges) 	<ul style="list-style-type: none"> • Taking erosion reduction measures in the river bank area; 	<i>During the earthworks</i>
				<ul style="list-style-type: none"> • Limiting works (building bridge piers) in the riverbed during the season sensitive for ichthyofauna; 	<i>Particularly low-water periods of the year</i>

	<i>erosive processes in the coastal area.</i>	<ul style="list-style-type: none"> • <i>Use of polluting materials, waste;</i> • <i>Operation of construction camps.</i> 		<ul style="list-style-type: none"> • <i>Agreeing the question of wastewaters with the Ministry (if necessary);</i> 	<i>Before putting the construction camps to operation</i>
				<ul style="list-style-type: none"> • <i>Use of wastewater treatment structures;</i> • <i>Protection of the environment from pollution; proper waste management;</i> 	<i>Permanently, during the operation of the construction camp</i>
				<ul style="list-style-type: none"> • <i>Taking recultivation works in the river bank area.</i> 	<i>After completion of works</i>

7.8 Visual-landscape changes

7.8.1 Construction Phase

The visual-landscape change is associated with the preparatory and construction works, during which the builders, construction techniques and vehicles will move. Temporary objects will be provided on the territories of the com camps, the vegetation cover will be cleared, significant amount of stripped soil will be originated, whose storage will cause the change of the esthetic view.

When assessing the landscape impact and the visual change of the view, the value of the selected area, degree of its naturalness and the scales of human activities on the area matter. We must take into account how visible the project corridor can be for such receptors, as local population.

There are no important tourist attractions and/or highly valuable sceneries present in the design corridor and its adjacent areas. As already mentioned, these areas are mostly the agricultural landscapes with quite intense human activities. Consequently, the areas to develop belong to the category of the landscapes with their value lower than average.

Potential receptors of the visual-landscape changes may be the population of villages adjacent to the corridor as well as fauna. The works planed along the last section of the corridor will be easily visible for passengers using the road.

After the construction works are complete, the machines and equipment, materials and waste will be removed from the construction grounds, temporary structures will be dismantled and removed, the workers will retreat and the used areas will be recultivated what will more or less remedy the situation.

7.8.2 Operation phase

Main source of the visual impact is the traffic movement on the operation phase. Planting of trees and plants along the road corridor will support restoration of the landscape components. Over time, the new infrastructure is adaptable and visual discomfort caused by visual changes will be less disturbing for the population.

7.8.3 Impact mitigation measures

Construction phase

- Temporary structures, materials and waste (including spoil) should not be placed in visible places as far as possible;
- Colors of temporary structures shall be in harmony with the environment (green, brown);
- The waste and materials will be properly managed, the sanitary conditions will be observed and the waste will be removed from the territory in a timely manner;
- The height of the placed inert materials must not exceed 5 m what is optimal in respect of mitigating the risks of instability and negative visual impact. The driving routes of transport and techniques will be observed;
- The night illumination on the working sites will be controlled to avoid bright light and light pollution. Propagation of light to the adjoining residential zones will be minimized;
- Demobilization of the temporal infrastructure and recultivation works following the completion of the works.

Operation phase

- An important mitigation measure in the operation phase is landscaping and maintaining the areas adjacent to the highway.

7.9 Waste

A certain amount of hazardous and other types of waste are expected to originate in the construction phase. The waste rock to originate during the earthworks, which will be disposed to the landfills, is notable. However, it should be noted that the most of the corridor selected for the Highway runs across the satisfactory relief conditions and as a result, the disposal of the waste rock will not be associated with any significant difficulties.

It should also be noted that within the limits of the corridor, the roofs of buildings and premises located in the highway ROW are made of slates (asbestos-containing materials). In addition, the corridor may cross asbestos-containing pipes. The given type of waste may be found on other sites of the corridor during the earthworks. The management issues of asbestos-containing materials. The procedures of their collection, removal and final disposal must be undertaken by using the internationally accepted methods. Before the commencement of the construction, the Construction Contractor will develop a detailed management plan of asbestos-containing materials.

Waste Management Plan is provided in attachment 5.

7.10 Impact on social-economic environment

The impact of the project implementation on the social-economic environment is expected in the following directions:

- Resettlement impact;
- Impact on private business;
- Expected income on agriculture;
- Constraints in traffic and limited access to the resources;
- Expected impact on local infrastructure;
- Human health and safety;
- Positive impact: employment, improvement of transport infrastructure and the resultant economic benefit.

7.10.1 Resettlement and impact on private business

The project corridor will not run across densely populated areas. However, as per the preliminary assessment, some commercial buildings will be under the impact and consequently, few, so called physical resettlements will be necessary (see Figure 7.9.1.1.). In this respect, the initial section of the corridor adjacent to the territory of village Kirokasa and village Sadakhlo.

As for the economic resettlement, quantitatively, the privately owned agricultural plots are notable. As per the GIS data, 740 private plots will be subject to resettlement (their number will be further specified within the scope of preparation of the Resettlement Action Plan).

Drawing 7.9.1.1. shows the map showing the location of the plots under the impact of the project highway.

Besides, there are business objects along some sections adjacent to the road, such as shops, catering objects, fueling stations, as well as greenhouses (See Figure 7.9.1.2.).

It is planned to develop the resettlement action plan and organize meetings with the locals. The resettlement procedure will be accomplished in line with the requirements of the international finance organizations, and all beneficiaries will receive relevant (fair) compensation. At the stage of developing the Resettlement Action Plan, a particular attention should be paid to the current business along the section of the Highway where the traffic flow is expected to decrease. The business incomes are expected to reduce along these sections for the business owners.

Following the safety and technical standards requirements, trading with agricultural products by the local people is prohibited adjacent to the Highway. Consequently, the population, who gains certain benefit through such a business, will lose their incomes. Within the scope of the project, it is necessary to plan the construction of the organized trade center(s) adjacent to the project Highway so that the population should not lose sources of income. The compensation for the business suspension will be given out as the last alternative and this decision must be clearly grounded in the Resettlement Action Plan.

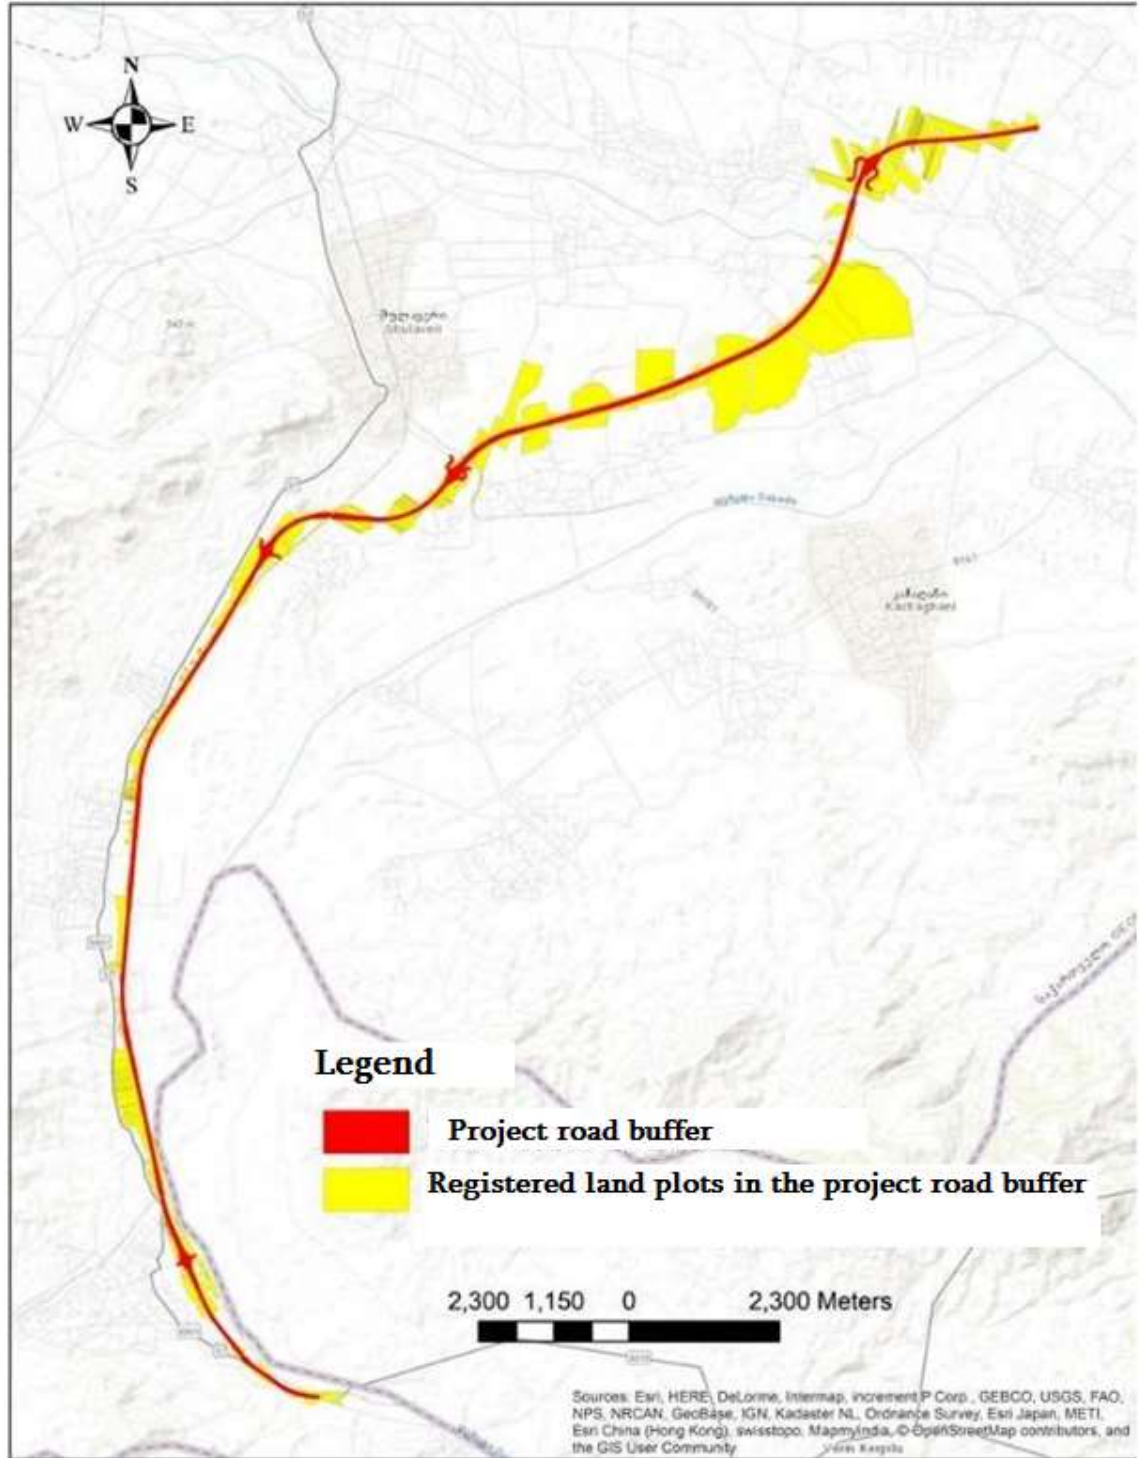


Figure 7.10.1.1. Homestead plots in the Highway buffer



Figure 7.10.1.2. Greenhouse economy in the Highway buffer

Drawings 7.10.1.1. Location of private plots under the impact of the project corridor



7.10.2 Impact on agriculture

In terms of Georgia, the project region is not a land-poor area. The loss of the agricultural plots as a result of using the project zone will not have a high negative impact on the land cultivation. Even a positive impact is expected in the exploitation phase: the facilitated transportation and better realization prospects for the agricultural produce as a result of the improved transport network.

As for cattle-breeding, road construction and exploitation may constrain the driving of cattle to the pastures to some extent. In order to avoid the farmers' limited access to the resources, this issue was considered in the design phase and as it is stated in the description part of the project, relevant underpasses for domestic animals are planned at many points.

7.10.3 Temporal obstruction of traffic

During the intense transportation of building materials and structures in certain periods of the construction phase, the risks of impact on the local roads and constraints of movement will increase. However, as mentioned above, secondary ground roads are quite well developed in the project area and consequently, identifying alternative routes will not be associated with great difficulties. The impact is significantly reduced by the fact that the project envisages cutting a new corridor – for the most of the construction period, trouble-free travel will be possible along existing Marneuli-Sadakhlo Road.

In the construction phase, the transportation routes will be selected by bypassing the densely populated areas. At the same time, the periods favorable for transportation will be identified. The Construction Contractor will have proper and efficient communication with the local population so that their ability to move freely is not impaired. It should be noted that the Construction Contractor will develop the Traffic Management Plan and will agree it with the client and other concerned entities (patrol police, local authority, etc.).

7.10.4 Expected impact on local infrastructure

The following crossing points of the project road with the infrastructural communications were planned under the project:

- Power transmission lines;
- Regional and local roads;
- Irrigation channels (including new Sadakhlo main channel near the last section of the road corridor);
- The corridor along the section between the villages Damia Giurarkhi and Kirovka crosses the penstock small-capacity Debeda HPP;
- Other underground pipes;
- etc.

For details, see paragraph 4.10.6.

The issue of crossing the communications will be agreed with the communal service departments. Restructuring and relocation projects will be discussed with relevant offices. The given types of works will be planned and accomplished in the way minimizing the duration of a limited access to the relevant resources.

7.10.5 Human health and safety

Both, in the construction and operation phases, the risks of impact on personnel health and safety may be associated mainly with unforeseen cases, in particular:

- Deterioration of the air quality in the working zone and increased noise levels as a result of faulty equipment and appliances;
- Poisoning with drinking water or food;
- Occupational injury (fractures,, electrical injury, etc.);
- The risks of infectious diseases must also be considered.

In the construction phase, human health and safety risks will be duly managed. For this purpose, special staff of safety officers will be assigned. The safety measures on the territories of the construction camps and construction grounds incorporate the following:

- The technological equipment and appliances for construction will be provided by observing the relevant standards;
- Fire control, water supply and lighting systems must meet the set standards;
- Installing warning signs on the sites hazardous for health. All hazardous sites will have instructions regarding the observance safety standards exhibited;
- The sites hazardous for health are planned to fence;
- The personnel will be equipped with PPE.

Putting the highway to operation may be assessed positively in respect of human health and safety. The highway will be constructed in line with the international standards. As a result, the risks of car accidents and accidents on the existing highway will reduce drastically.

7.10.6 Positive social-economic impact

The benefit of the project implementation will affect the population of all the country. The traffic flows will increase (including transit traffic) and the movement will be facilitated; the risks of accident will decrease drastically and the employment opportunities for the people in the region will increase. In addition, the dissatisfaction of the people employed at other road sections caused by the loss of employment will be reduced.

The project will have a positive impact on the employment of the local population. As per the Good Practice in Georgia, 70% of the local workers are planned to hire as it was the case with the other sections of the highway.

By considering all the above-mentioned, the impact on the social-economic environment must be considered positive and significant.

7.11 Risks of impact on the historical and archeological monuments

As the preliminary study suggests, no visible monuments of cultural heritage were fixed in the zone

under the impact of the Highway. In fact, the building process does not envisage the use of the kinds of methods, which will result in the propagation of any negative impact to far distances (e.g. intense explosion works).

In respect of cultural heritage and archeology, the probability of the appearance or damage of invisible resources (those in the ground) is much reduced by the specific nature of the design corridor: it will mainly run across the agricultural plots where the ground is intensely cultivated. Despite this, the chance finding of the archeological artifacts cannot be ultimately excluded and the preventive measures against the damage of the items in the deep earth layers with the historical value must be taken.

On the other hand, the chance find of archeological artifacts and obtained information will enrich the existing knowledge and may be a positive aspect of the cultural development.

During the highway operation, the risks of damage of invisible archeological monuments is in fact excluded.

7.11.1 Mitigation Measures

When performing earthwork in case of chance finding of the archeological items, the Contractor must immediately cease all physical activities and must inform the Roads Department about the chance finding. The Roads Department will swiftly inform the Ministry of Culture and Monument Protection of Georgia thereof, which will assume the general responsibility for the activities. The works are allowed to resume only after receiving a written permit from the Ministry of Culture and Monument Protection of Georgia to resume the works.

7.12 Information about the possible transboundary impact

The river Debeda, near which the considered activity is planned to realize, is a transboundary river. However, it flows from the territory of Armenia and flows into river Khrami. Consequently, even in an unforeseen case of water pollution, no transboundary impact will occur.

Distance from the last point of the highway project corridor to the border of Armenia is approximately 500 m. There is borderline infrastructure found in this area, with intense traffic. No receptors sensitive to negative impact (e.g. residential zone, etc.) are found in this area. Consequently no transboundary impact caused by emissions, noise and vibration typical to the construction works is expected.

As for the exploitation phase, upgrading the highway connecting the two countries to the international standards will be of a great benefit both for Georgia and Armenia. At the given stage of activity, a positive transboundary impact in different directions is expected.

7.13 Cumulative Impact

In respect of a cumulative impact of the present Project, in the first instance, a planned similar project from city of Rustavi to Red Bridge checkpoint (Georgian-Azerbaijani border) must be considered. These projects are plotted on figure 7.12.1.

Figure 7.13.1. Plans of mutual locations of Rustavi-Red Bridge and Rustavi-Sadakhlo Highways



It should be noted that both highways will mainly run across the privately owned land plots. In the final run, both projects are associated with significant economic resettlement. Resettlement Action Plans will be developed for both projects and realized in practice. The population in the impact zone will be duly compensated.

In other respects, the significance of the expected cumulative impact in the construction phase will be lower than average, in particular:

- The project corridors will not run across the territories with high-value natural components (e.g. forest fund area, protected areas, habitats of high conservation value);
- As compared to other Regions of Georgia, agricultural plots in Kvemo Kartli occupy quite vast areas. Consequently, the impact of the agricultural losses caused by the impact of such projects on agriculture will not be significant;
- The project region is quite rich in the supplies of inert materials. Consequently, during the highway construction, no strong impact of natural resources is expected.

The mitigation measures planned within the scope of both projects will ensure the maintenance of the qualitative state of various receptors (water, air, soil).

In the exploitation phase of the Highways, significant cumulative effect is expected what will be associated with the significant improvement of the land traffic with the neighboring countries and resultant positive social-economic trends. Inter alia, the considered projects will support the growth of the tourist and transit potential of the country.

Overall, it may be said that the development of the transport network in the region with two above-said projects playing a key role will bring a much more positive cumulative effect.

Negative cumulative impact will be insignificant and needs no detailed consideration.

7.14 Residual impact

Based on the preliminary study, it may be said that none of the residual impacts will be of the value higher than average. The planned mitigation measures will be efficient and the need for taking the compensation measures is minimal. Out of the residual impacts, only the issues of impact on the social-economic environment can be noted, the economic resettlement in particular: quite many agricultural plots will be under the impact. In this connection, it may be said that the Resettlement Action Plan will be developed, which will give a thorough description of the compensation measure. Provided the compensation measures are realized, in this respect, too, the residual impact will be low.

7.15 Summary table of the expected environmental impacts

<i>Impact category</i>	<i>Construction phase/ Exploitation phase</i>	<i>Impact direction⁷</i>	<i>Geographical distribution of impact⁸</i>	<i>Initial value of impact⁹</i>	<i>Impact duration¹⁰</i>	<i>Reversibility of impact¹¹</i>	<i>Mitigation efficiency¹²</i>	<i>Final impact rating¹³</i>
<i>Pollution of atmospheric air</i>	Construction phase	Negative	Local	Average	Short-term	Reversible	Average	Low
	Exploitation phase	Negative (somewhat positive)	Local	Low	Long-term	Reversible	Low	Low
<i>Propagation of noise and vibration</i>	Construction phase	Negative (somewhat positive)	Local	Average	Short-term	Reversible	Average	Low
	Exploitation phase	Negative	Local	Low	Long-term	Reversible	Low	Low
<i>Impact on geological environment</i>	Construction phase	Negative	Local	Average	Short-term	Reversible	Average	Low
	Exploitation phase	Insignificant or not expected	-	-	-	-	-	-
<i>Impact on water environment</i>	Construction phase	Negative	Local, Regional	Average	Short-term	Reversible	Average	Low
	Exploitation phase	Negative	Local, Regional	Low	Long-term	Reversible	Low	Low
<i>Impact on soil</i>	Construction phase	Negative	Local, Regional	Average or High	Short-term	Reversible	Average, High	Low
	Exploitation phase	Negative	Local, Regional	Low	Long-term	Reversible	Low	Low

⁷ Positive/negative

⁸ Local/regional/country-specific

⁹ Low/average/high

¹⁰ Short-term/long-term

¹¹ Reversible/irreversible

¹² Low/average/high

¹³ Low/average/high

<i>Reduction of the vegetation cover and loss of habitats</i>	Construction phase	Negative	Local	Average, Low	Long-term	Reversible	Average and Low	Low
	Exploitation phase	Insignificant or not expected	-	-	-	-	-	-
<i>Direct impact on animal species</i>	Construction phase	Negative	Regional	Average	Short-term	Reversible	Average	Low
	Exploitation phase	Negative	Regional	Low	Long-term	Reversible	Low	Low
<i>Visual-landscape impact</i>	Construction and exploitation phases	Negative	Local	Low	Long-term	Reversible	Low	Low
<i>Social-economic environment</i>								
<i>Impact on the basic factors of economic development</i>	Construction and exploitation phases	Positive	National	Average	Long-term	-	-	-
• Employment	Construction phase	Positive	Regional	Average	Short-term	-	-	-
<i>Impact on land use, cattle-breeding and local resources</i>	Construction and exploitation phases	Negative	Regional	High	Long-term	Reversible	High (including compensation)	Low
<i>Human safety/health</i>	Construction and exploitation phases	Negative	Regional	Low-Average	Long-term	Reversible	Average	Low
<i>Impact on archeological monuments</i>		Negative	Local	Low	Short-term	-	Low	Low

8. ENVIRONMENTAL MANAGEMENT PLAN

8.1 Introduction

Following the requirements of the Georgian environmental legislation and environmental policies of the international finance organizations, an important component of an EIA report is the environmental management plan (EMP). The goal of the EMP is to develop the mitigation and monitoring measures for the impacts identified within the scope of the EIA procedures to be used in practice by the project implementing agency - the RD, and thus, bring its activities into compliance with the environmental and social requirements envisaged by the national as well as with the environmental and social policies of the international finance organizations.

The given EMP is based on the information given in the previous chapters, in particular, activity specifics, and background properties of the natural and social environment of the working area, expected negative impacts during the activity and their propagation area. The EMP is drafted for different stages of activity, including designing and preparatory works planning phases (see tables 8.2, 8.3 და 8.4). The EMP is a live document and it can be detailed immediately during the accomplishment of the activities following the monitoring outcomes or other practical terms. Any changes or corrections to this EMP will be done based on the formal agreement between the client and financial organizations.

The mitigation measures given in the EMP are scheduled in line with the works to accomplish and expected impacts of these works. The location and terms of the mitigation measures to accomplish are specified and the entity responsible for accomplishing the mitigation measures is also identified.

The EMR document will be incorporated in the work tender documents and the tender participants will have the possibility to specify their environmental protection duties in their proposals. After the onset of the construction works, the ESMP will be the part of the agreement between the client (roads department) and the construction contractor and it will be necessary to accomplish in the course of the construction works.

Responsibility for the implementation of EMP in construction and operation phases will be carried by RD, Department of the Environmental Protection and Resettlement. State control over the implementation of various aspects of ESMP will be undertaken by the Environmental Supervision Department of the MEPA and international financial organization. The control envisages checking the quality of EMP performance, identifying environmental violations, and developing further corrective actions.

8.2 Environmental Documents and Records

It may be said that an important and perhaps, absolutely necessary mechanism of EMP realization is putting the relevant environmental documents to order and ensuring their permanent update. After identifying the Construction Contractor and issues of building organization, the Roads Department of Georgia, in line with the national legislation, is obliged to develop the following environmental documents and submit them to the MoEPA to reach an agreement:

- Developing the project for the maximum allowable discharge (MAD) standards of polluting substances discharged into the surface waters together with the waste water (if necessary);
- Technical report of the stationary sources of harmful substances emitted into the atmospheric air (if necessary);
- Detailed plan of waste management;
- Documents envisaged by the terms of the Permit issued by the MoEPA, (quarterly reports of the environmental monitoring, detailed designs of construction camps and spoil grounds, plan of recultivation works, etc.);

The Construction Contractor must be engaged in the development of all above-listed documents. On its turn, the contract concluded with the Builder must envisage his obligation to submit and agree the following documents and records to the Client:

- Traffic management plan;
- Health and safety management plan;
- Emergency response plan.

In addition, the Implementer (and the Construction Contractor on his errand) shall keep and use the following records in practice during the construction:

- Plan and schedule of the works to accomplish;
- List of the machines and equipment needed for construction;
- Records related to the occurring environmental problems;
- Records about the waste management issues;
- Written marking of the areas of waste disposal and waste transportation instructions issued by the local authority;
- Records about the supplies of necessary materials and their consumption;
- Complaints log books;
- Incident registration logs;
- Reports about the correction actions;
- Logs of equipment control and technical maintenance;
- Reports about the personnel training.

The following paragraphs give EMPs at each stage.

8.3 Costs of ESMP Implementation

In total the planned environmental activities will cost around 14,527,894 (4 794 684 EURO)

GEL³.

Excess materials - At the construction stage, 1 580 000 m³ excess materials are expected to originate. This amount will be placed on the preliminary selected site agreed with the local authority. Distance from the area where excess materials will be produced to placed areas will be approximately 8-10 km. A presumable cost of disposal of 1 m³ excess material is 6.50 GEL (transportation, disposal and area restoration). Total costs for excess materials disposal – 10 260 000 GEL.

Noise Abatement. The limit speed in the project road is 120 km/hour. Construct 4m height sound proof wall summary for 3.6 km section of the road. Installation of 4.00 m height noise barriers in various places along the design road: Construction of concrete barrier will cost around 2,930,000 Gel (967 000 EURO). Total cost of noise abatement measures is around 2,930,000 GEL. **These costs could be optimized by applying concrete walls or combination of concrete wall with polymer screen.**

Ecology. Replanting of trees. We propose to consider planting of 250 trees to offset the project damage, improve aesthetic and recreational value of the area. Landscape plan should be elaborated by Road Department in collaboration MoEPNR. Seedlings of 250 trees will cost around 2500 GEL. Thus, approximately 2500 GEL should be considered in budget for tree planting and landscaping.

Topsoil storage. 93 750 m³ of topsoil will be stripped and stockpiled. Cost of these operations equal 93 750 m³ x 4 Gel = 375 000 GEL

Capacity building program for road department environmental team including training of personnel will cost around 3,000 GEL

In the tables 1-2 submitted the cost for Environmental and social management plan separately for each lot.

Table 1: Costs of Implementation ESMP for LOT 3

Item	Cost GEL	Cost EURO	Budget Line
Excess Materials Management (transportation, disposal and area restoration)	5 130 000	1 693 000	Construction Contractor
Preparation of Noise Abatement Plan and	20 000	6 600	Construction

³ The cost was calculated for case if for each LOT will be hired separate construction company and supervision company.

Detailed Design for Noise Abatement Facilities			Contractor
Implementation of Noise Abatement Plan	765 000	252 475	Construction Contractor
Preparation and Implementation of Landscaping Plan	1 250	413	Construction Contractor
Topsoil Storage	140 000	46 206	Construction Contractor
Climate Adaptation Actions			
<u>Earthworks (0.3 % Total Component Investment Cost)</u>	73 160	24 145	Construction Contractor
<u>Culvert, Drainage and Underpasses (0.1% Total Component Investment Cost)</u>	1 103	364	Construction Contractor
<u>Bridges (1.8% Total Component Investment Cost)</u>	143 553	47 337	Construction Contractor
<u>Interchanges (0% Total Component Investment Cost)</u>	0	0	Construction Contractor
Monitoring			
Environmental Specialist	120 000	39 600	Construction Contractor
Environmental Specialist	120 000	39 600	SC
Sound meter	2 000	660	SC
Device for dust measurement	3 000	990	SC
Portable device for CO2 measurement	2 000	660	SC
Training and Capacity Building			
Capacity building program for road department environmental team	3 000	990	Road Department
Capacity building program for construction company environmental team	3 000	990	Construction Contractor
	6 527 066	2 154 147	

Table 2: Costs of Implementation ESMP for LOT 4

Item	Cost GEL	Cost EURO	Budget Line
Excess Materials Management (transportation, disposal and area restoration)	5 130 000	1 693 000	Construction Contractor
Preparation of Noise Abatement Plan and Detailed Design for Noise Abatement	20 000	6 600	Construction Contractor

Facilities			
Implementation of Noise Abatement Plan	2 125 000	701 320	Construction Contractor
Preparation and Implementation of Landscaping Plan	1 250	413	Construction Contractor
Topsoil Storage	235 000	77 558	Construction Contractor
Climate Adaptation Actions			
<u>Earthworks</u> (0.3 % Total Component Investment Cost)	55 112	18 189	Construction Contractor
<u>Culvert, Drainage and Underpasses</u> (0.1% Total Component Investment Cost)	1 054	347	Construction Contractor
<u>Bridges</u> (1.8% Total Component Investment Cost)	180 412	59 542	Construction Contractor
<u>Interchanges</u> (0% Total Component Investment Cost)	0	0	Construction Contractor
Monitoring			
Environmental Specialist	120 000	39 600	Construction Contractor
Environmental Specialist	120 000	39 600	SC
Sound meter	2 000	660	SC
Device for dust measurement	3 000	990	SC
Portable device for CO2 measurement	2 000	660	SC
Training and Capacity Building			
Capacity building program for road department environmental team	3 000	990	Road Department
Capacity building program for construction company environmental team	3 000	990	Construction Contractor
	8 000 828	2 640 537	

8.4 Environmental management plan (EMP) - Planning stage of building organization

Negative impact	Mitigation measure	Supervising body	Approximate value
Emissions of harmful substances into the atmospheric air, propagation of dust, noise and vibration	<ul style="list-style-type: none"> – Selecting the sites for construction camps, concrete units, asphalt plants, crushing and sorting shops (if any) far from the settled area of Marneuli Municipality. – Treatment (crushing and sorting) of inert materials must be done on the mining site as far as possible. The air protection documents for emission objects must be developed and agreed with the Ministry; 	Roads Department of Georgia	Extra costs may be associated with the greater distances of transportation; however, these costs will not be too great.
Disturbance of the stability of the geological environment	Selecting geologically stable areas with least possible inclination for ground disposal.	„-----“	
Impact on aquatic environment	<ul style="list-style-type: none"> – The priority for the collection of industrial and fecal waters must be given to cesspools and UD toilets. Discharge of the wastewater into the surface waters must be brought to minimum (if any, the draft MAD standards must be developed in advance and agreed with the Ministry). – Water supply reservoirs must be considered on the construction camps in order to ensure the rational use of water resources. A drainage system must be arranged on the construction camp. 	„-----“	To be considered in the total contract value
Visual-landscape change	<ul style="list-style-type: none"> – Selecting the sites for temporal construction infrastructure and waste storage at maximally invisible locations, far from the settled area of Khevi community. Selecting the color and design of the temporal construction infrastructure suitable for the natural environment. 	„-----“	Extra costs may be associated with the greater distances of transportation and price differences
Impact on private property/ business	Developing the Resettlement Action Plan and giving out compensations/compensating the damage.	„-----“	Costs may be associated with hiring the consultant
Impact on traffic flows	<ul style="list-style-type: none"> – Developing the traffic management plan to consider the interests of the local people. 	„-----“	To be considered in the total contract value

Employment	- The local population must be prioritized in employing unskilled labor.	„-----“	Not associated with extra costs.
------------	--	---------	----------------------------------

8.5 Environmental management plan (EMP) - Construction phase

Type of work	Location	Expected negative impact	Mitigation measure	Responsible entity	Controlled by:
Preparatory works: mobilization of the temporal infrastructure, transport and construction appliances and equipment and mechanisms needed for construction.	The area of the construction camps	Emissions of harmful substances into the atmospheric air, and noise propagation	<ul style="list-style-type: none"> - Installing the stationary emission sources from the settled areas as far as possible; - Equipping the emission stationary facilities with relevant air-cleaning systems. <p>Making noise-protection barriers if necessary between the noise sources and the receptors (population).</p> <p>Choosing non-faulty construction techniques and vehicles</p>	Construction Contractor	Roads Department, Ministry of Environment and Agriculture of Georgia
		Risks of pollution of surface and ground waters and soils	<ul style="list-style-type: none"> - Use of non-faulty construction techniques and vehicles. - The machines/equipment and potentially polluting materials will be placed far from the surface water objects, in the areas protected against the atmospheric precipitations. - Equipping the territory with storm-water and treatment systems at the initial construction stages. - Fencing the perimeter of the oil products supply reservoirs to prevent the propagation of the pollutants in case of emergency spills 		

			<ul style="list-style-type: none"> - Discharge of any kind of untreated wastewater into the rivers is to be prohibited. - Providing water-proof layers on the surfaces of the storing areas. - The priority for the collection of industrial and fecal waters must be given to cesspools and UD toilets. Discharge of the wastewater into the surface waters must be brought to minimum; 		
		Negative visual-landscape change	<ul style="list-style-type: none"> - Temporal structures, materials and waste will be placed at locations far and not visible from the visual receptors. - The color and design of the temporal structures will be chosen to suit the environment. - Demobilization of the temporal infrastructure and recultivation works following the completion of the works. 		
		Safety risks for local people and personnel	<ul style="list-style-type: none"> - Use of non-faulty construction techniques and vehicles; - Fencing the camp territories right at the initial stage of the construction; - Installing the safety signs along the perimeter of the camps. - Protecting the perimeter of territory and controlling the movement of foreign people in the area. - Equipping the personnel with PPE and providing permanent control over their use; - Equipping the camps with the first aid kits 	Construction Contractor	Roads Department

			<ul style="list-style-type: none"> - Ensuring electrical safety. - Keeping an incident registration log. - Personnel training at the initial stages - The Construction Contractor will appoint H&S manager, who will permanently control observance of the safety standards by the prsonnel; 		
Cleaning the corridor off the vegetation cover and accomplishing the earth works. The topsoil stripping is meant. Ensuring the right topography of the area (terracing, making cuts and fills) making foundations for bridges, etc.	Design road corridor	Cutting down the vegetation cover, habitat loss/fragmentation.	<ul style="list-style-type: none"> - Protecting the project perimeter to prevent excess harm to the plants. - Delisting the protected species from the environment will be done in line with the requirements of sub-clause v) of clause 1 of article 24 of Georgian Law “On the Red list and Red book of Georgia”, in agreement with the Ministry of Environment Protection and Agriculture of Georgia; - The expected impact will be partially compensated at the expense of recultivation and landscaping works. <p>Protection the borders of the working area;</p> <ul style="list-style-type: none"> - Bordering the ditches to prevent the animals from falling into them and getting harmed; - Efficient use of the mitigation measures for the pollution of the environment (air, water, soil); - Thoroughly examining the affected areas in advance in order to identify the places of concentration/habitats of the animals these sites; 	Construction Contractor	Roads Department
		<p>Damage or harm to animals, disturbance and migration from the territory, damage of their habitats (holes, nests, etc.)</p> <p><i>(For further details See the table given in Para 7.6.4.2.1. of the present EIA Report)</i></p>	<ul style="list-style-type: none"> - Observing the borders of the working area; - Bordering the ditches to prevent the animals from falling into them and getting harmed; - Efficient use of the mitigation measures for the pollution of the environment (air, water, soil); - Thoroughly examining the affected areas in 	Construction Contractor	Roads Department, MoEPA

		<p>advance in order to identify the places of concentration/habitats of the animals these sites;</p> <ul style="list-style-type: none">- Accomplishing earthworks in limited terms;- Giving the explanation to the personnel regarding the importance of species and sanctions in case of unfair behavior.		
				Ministry of Environment and Agriculture of Georgia

		<p>Noise propagation, emissions of dust and combustion products</p>	<ul style="list-style-type: none"> - Use of non-faulty construction techniques and vehicles; - Accomplishing the noisy works during the day as far as possible - Loading and unloading heights of the materials in the vehicles will be minimized to the extent possible; - Running the vehicle drives at minimal speed; - Accomplishing the intense construction works during the day as far as possible; - Prior to commencement of the intense construction works near the settled zone, temporary noise barriers may become necessary to provide towards the residential houses and other sensitive objects; <p>The state of the buildings and premises adjacent to the main working sites will be examined periodically and the impact of vibration on cracks and damages will be determined by means of observation and relevant mitigation measures will be taken as necessary.</p>	<p>Construction Contractor</p>	<p>Roads Department,</p>
--	--	---	--	--------------------------------	--------------------------

		<p>Loss of topsoil and degradation of sites</p>	<ul style="list-style-type: none"> - Topsoil stripping and piling separately from the lower soil layer and other materials. - Water-diversion channels will be made along the perimeter of the topsoil fill and will be protected against scattering by the wind blow; <p>In case of long-term storage of the topsoil, the measures must be taken to maintain its qualitative properties. Periodic loosening or grass sowing is meant under this clause.</p> <p>Following the completion of the construction works, the territory will be recultivated and sanitary conditions will be restored what will reduce the probability of impact on soil quality and stability. The recultivation works will be done mainly in the roadside zone (embankments and cutting slopes) and spoil grounds.</p>	<p>Construction Contractor</p>	<p>Roads Department, Ministry of Environmental Protection and Agriculture of Georgia.</p>
		<p>Development of geodynamic processes</p>	<ul style="list-style-type: none"> - The slopes on the sites of sections will be duly terraced. The terraced sites will be provided with relevant drainage; - When providing the embankments, the bearing capacity of the grounds will be considered. On the sites where the ground is not sufficiently stable, additional reinforcement (rabbets, stone columns, rigid insertions or preliminary load + drainage pipes) under the embankment will be used; 	<p>Construction Contractor</p>	<p>Roads Department, Ministry of Environmental Protection and Agriculture of Georgia</p>

			<p>Geosynthetic materials will be used on the slopes of cuts and embankments as per the recommendations provided by the engineering-geological conclusion (see paragraph 5.5.5.4).,</p> <p>Large-scale earthworks on more complex sites, will be accomplished under the supervision of the geological engineer;</p> <p>When founding the engineering structures, the engineering-geological properties of the existing grounds will be considered. Bridge piers will be founded below the scouring depth;</p> <ul style="list-style-type: none"> - The structures crossing the surface waters are designed to release peak discharges as per the effective standards; - In order to prevent bogging of local sites, it is necessary to provide temporary drainage system and to place of the fills and materials in the manner as to avoid the bogging of the adjoining areas; - Diverting the rain- and spring waters by bypassing highly sloped and other sensitive sites by using relevant water diversion techniques (channels, pipelines, temporal berms, settling basins); - Compacting the ground fill properly to avoid slope collapse. - Limiting or stopping the works with the slopes during the wet weather. <p>Recultivating the damaged areas after the completion of the works,</p>		
		Erosion and deterioration of esthetic view	<ul style="list-style-type: none"> - The topsoil and subsoil must be placed far from the surface water objects. - The sites will be immediately filled and compacted and the surfaces and slopes will be graded. If needed, the slope stabilization techniques will be used. - Site restoration by scattering the topsoil from above and creating the conditions favorable to restore the vegetation cover. 	Construction Contractor	Roads Department,

		<p>Risks of pollution of surface and ground waters</p>	<ul style="list-style-type: none"> - Use of non-faulty construction techniques and vehicles; - In case of spills of oil/lubricants, the spilled product will be localized/cleaned in the shortest possible time. - The appliances creating the risk of ground water pollution when in operation will be equipped with drip pans; 	<p>Construction Contractor</p>	<p>Roads Department, Ministry of Environmental Protection and Agriculture of Georgia</p>
		<p>Damage or harm to animals, disturbance and migration from the territory, damage of their habitats (holes, nests, etc.)</p> <p><i>(For further details See the table given in Para 7.6.4.2.1. of the given EIA Report)</i></p>	<ul style="list-style-type: none"> - Observing the borders of the working area; - Bordering the ditches to prevent the animals from falling into them and getting harmed; - Efficient use of the mitigation measures for the pollution of the environment (air, water, soil); - Thoroughly examining the affected areas in advance in order to identify the places of concentration/habitats of the animals these sites; 	<p>Construction Contractor</p>	<p>Roads Department, Ministry of Environment and Agriculture of Georgia</p>

			<ul style="list-style-type: none"> - Accomplishing the ground works in limited terms. - Giving the explanation to the personnel regarding the importance of species and sanction in case of unfair behavior. 		
		Waste origination	<ul style="list-style-type: none"> - Waste management must be done under the Waste Management Plan agreed with the Ministry in advance; - If necessary, an additional document must be developed or the main document must incorporate asbestos-containing waste management plan; - The hazardous waste must be handed to the contractors with relevant permits for the given type of activity; <p>The relevant waste storage sites must be provided on the construction camps, which will be protected against wind and rain.</p>	Construction Contractor	Roads Department, Ministry of Environment and Agriculture of Georgia
		Accidental damage to the archeological monuments	<ul style="list-style-type: none"> - In case of finding any strange item, stopping the works immediately and informing the technical supervisor or the Client; <p>Renewing the works only after the formal instruction is received from the technical supervisor or the Client.</p>	Construction Contractor	Roads Department National Agency for Cultural Heritage Reservation
Building bridge piers and other works in / near the riverbed	Construction grounds near the riverbeds	Pollution of surface waters and impact on current integrity	<ul style="list-style-type: none"> - Use of non-faulty construction techniques and vehicles; - Equipping oil equipment with dripping systems; - The works to be accomplished in active riverbeds must be done within the limited time; - Prohibiting car wash in the riverbeds. 	Construction Contractor	Roads Department, Ministry of Environment and Agriculture of Georgia

			<ul style="list-style-type: none"> - Prohibiting car wash in the riverbeds; - During the construction of bridge piers, the construction ground will be isolated from the water current in the rivers with temporary embankments so that the continuous river flow is maintained as far as possible and to avoid its fragmentation; - After the construction is complete, the temporarily used areas will be recultivated and the sanitary conditions will be restored, and attention will be paid to providing the stability of sides of slopes and embankments to avoid the washdown of the loose material into the rivers together with the rainwater; 		
Transportation	Construction grounds near the riverbeds Corridors of the roads used to transport necessary materials, temporary structures, labor and waste. The routes running near the settled areas are also significant. The transport operations will continue for the whole construction period	Noise propagation, emissions of dust and combustion products	<ul style="list-style-type: none"> - Use of non-faulty construction techniques and vehicles; - Limiting the driving speeds; - Maximally limiting the use of public roads and identifying and using alternative routes. - Watering the surfaces of operation routes near the settled areas, in dry weather. - Duly covering the vehicle body during the transportation of dusty materials near the settled areas,; - The state of the buildings and premises adjacent to the main working sites will be examined periodically and the impact of vibration on cracks and damages will be 	Construction Contractor	Roads Department

determined by means of observation and relevant mitigation measures will be taken as necessary;

			<ul style="list-style-type: none"> - Informing the population about the forthcoming intense vehicle movement. - Near the settled zone, temporary noise barriers may become necessary to provide towards the residential houses and other sensitive objects. 		
		Damage to the local road pavements	<ul style="list-style-type: none"> - Limiting the movement of heavy techniques along the public road to the extent possible; <p>Restoring all damaged road sections to the extent possible to make the roads accessible to the people;</p>	Construction Contractor	Roads Department, local authorities
		Overloaded transport flows, limited movement	<ul style="list-style-type: none"> - Selecting an optimal bypass to the working area; - Installing road signs and barriers at necessary locations; - Limiting the movement of heavy techniques along the public road as much as possible; - Using flagmen for intense traffic; - Making temporal bypasses; <p>Informing the population about the time and periods of intense transport operations.</p>	Construction Contractor	Roads Department, local authorities
		Risks of safety of local people and personnel	<ul style="list-style-type: none"> - Use of non-faulty construction techniques and vehicles; - Driving the vehicles with admissible speeds. - Minimizing the use of the roads crossing the settled areas; <p>Limiting the traffic during the holidays</p>	Construction Contractor	Roads Department

Paving the road surface and facing works	Design corridor	Pollution of soil and surface waters	<ul style="list-style-type: none"> - Laying the road surface only in dry weather; - The road surface must be laid only by taking the relevant safety measures: - the materials or wastemust not dissipate over the site, etc. 	Construction Contractor	Roads Department, Ministry of Environment and Agriculture of Georgia
Waste management	Temporal waste storage areas, transport corridors and final storage areas	Irregular propagation of waste, environmental pollution	<ul style="list-style-type: none"> - Delivering the construction and other necessary materials only in needed quantities. - Re-using the waste as much as possible, including the use of inert materials for making the roadbed. - Arranging the temporal waste storage areas and equipping them with relevant signs. - Assigning the duly qualified personnel for waste management. <p>Instructing the personnel.</p>	Construction Contractor	Roads Department, Ministry of Environment and Agriculture of Georgia

8.6 Environmental management plan (EMP) - Exploitation phase

Type of work	Location	Expected negative impact	Mitigation measure	Responsible entity	Controlled by
Exploiting the road in a common mode	Along the road	Noise propagation	– Making noise barriers in the sensitive areas; (if needed).	Construction Contractor	Roads Department
		Waste propagation; propagation of oil products	- Regular cleaning of the roadside zone; –Regular cleaning and repairing of water channels and pipes	Construction Contractor	
		Development of hazardous geo-dynamic processes Emergency risks of erosion processes	- Monitoring the trouble-free performance of the protective engineering facilities for slopes and riverside zone and regular repairs. Regular cleaning and repairing of water channels and drain systems as necessary.	Construction Contractor	
		Emergency risks	– Equipping the road with relevant road signs; – Equipping the road with the night illumination system; – Permanent control of the technical state of the road cover and other road infrastructure (road signs, crossings, etc.), and accomplishing the relevant rehabilitation measures immediately after any damage.	Construction Contractor	
		Visual-landscape impact	- Landscaping along the corridor; - Recultivation of the adjoining areas.	Construction Contractor	
		Habitat fragmentation	- Providing overpasses for wild animals at relevant locations.	Construction Contractor	
		Impact on cattle-breeding – fragmentation of the driving corridor	- Providing overpasses for domestic animals at relevant locations.	Construction Contractor	

Planned repairs and preventive works	Along the road	Road pavement repairs	<ul style="list-style-type: none">- The road surface must be repaired in dry weather to avoid the pollution of the surface flow;- In order to avoid the dissipation of the materials used to repair the damaged road sections, the relevant works must be planned in an expedient manner.	Construction Contractor	
--------------------------------------	----------------	-----------------------	--	-------------------------	--

		Propagation of polluting substances (water, soil pollution) during te road pavement repairs			
--	--	---	--	--	--

9. ENVIRONMENTAL MONITORING PLAN

9.1 Introduction

One of the preconditions for reducing the negative nature and value is the correct management of the strict and well-planned activity under strict supervision (environmental monitoring).

The monitoring methods incorporate visual observation and measurements (if needed). The monitoring program describes the monitoring parameters, time and frequency of monitoring, and collection and analysis of monitoring data. The size of monitoring depends on the value of the expected impact/risk.

The environmental monitoring plan in the project base must cover the issues, such as:

- Assessment of the state of environment.
- Identification of the reasons for changes in the environment and evaluation of the outcomes.
- Identification of the correction measures when the target values cannot be reached.
- Regular supervision over the degree and dynamics of the impact of the activity on the environment.
- Compliance with the legal requirements for impact intensity.
- Control over the set parameters associated with significant ecological aspects.
- Prevention and timely identification of the possible violations related to ecological aspects or emergencies during the activity.

The following are subject to the regular observation and evaluation in the course of environmental monitoring:

- Atmospheric air and noise;
- Water;
- Geology
- Soil;
- Biodiveristy
- Labor conditions and meeting the safety standards, etc.

9.2 Environmental monitoring plan in the construction phase

What? (Is the parameter to monitor)?	Where? (Is the parameter to monitor)?	How? (Must the parameter be monitored)?	When? (frequency or duration of monitoring)	Who (Is responsible for monitoring)?
1	2	3	4	5
Dust propagation, exhaust fumes	<ul style="list-style-type: none"> • Construction camps; • Construction corridors; • Transportation routes; • At the nearest Buildings 	<ul style="list-style-type: none"> • Visual observation; • No significant dust propagation is fixed; • The machines and technique are non-faulty without significant exhaust fume; 	<ul style="list-style-type: none"> • Checking dust propagation – during the intense operations and vehicle movement, particularly in dry and windy weather. • Checking the technical state - at the start of the working day 	Roads Department and Supervision company for construction works
	<ul style="list-style-type: none"> • At the nearest settled areas and other sensitive objects, at the following presumable points: <p>1-x489189; y4578489 (Village Akhali Mamudlo)</p> <p>2-x488975; y4578545 (Village Araflo)</p> <p>3-x485436; y4577338 (Village Kvemo Sarali)</p> <p>4-x483318; y4574891 (Village Zemo Sarali)</p> <p>5-x482580; y4573114 (Vilage Akhlo Lalalo)</p> <p>6-x482363; y4572044 (Village damia Giurarkhi)</p> <p>7-x482700; y4569935 (Village Kirovka)</p> <p>8-x482488; y4569751 (Village Kirovka)</p> <p>9-x483267; y4566547 (Village Sadakhlo)</p> <p>10-x484205; y4564885 (Village Sadakhlo)</p> <p>The existing ground road sections, which will run close the settled areas and will be intensely used for construction purposes.</p>	Measuring dust concentration with a portable device.	<ul style="list-style-type: none"> • During the intense works on a relevant site, in dry, particularly windy weathers twice a day • In case of complaints 	Roads Department and Supervision company for construction works

	<ul style="list-style-type: none"> At the border of the stationery sources of dust propagation 	Measuring dust concentration with a portable device.	<ul style="list-style-type: none"> Once a week in dry and particulaly windy weather 	Roads Department and Supervision company for construction works
Noise propagation	<ul style="list-style-type: none"> Construction camps; Construction corridors; Transportation routes; At the nearest Buildings 	Control of the technical state of machines and equipment;	Checking the technical state - at the beginning of the working day;	Roads Department and Supervision company for construction works
	<ul style="list-style-type: none"> At the nearest settled areas and other sensitive objects, at the following presumable points: <p>1-x489189; y4578489 (village Village Akhali Mmaudlo)</p> <p>2-x488975; y4578545 (village Araflo)</p> <p>3-x485436; y4577338 (village Kvemo Sarali)</p> <p>4-x483318; y4574891 (village Zemo Sarali)</p> <p>5-x482580; y4573114 (Akhlo Lalalo)</p> <p>6-x482363; y4572044 (village Damia Giurarkhi)</p> <p>7-x482700; y4569935 (village Kirovka)</p> <p>8-x482488; y4569751 (village Kirovka)</p> <p>9-x483267; y4566547 (Village Sadakhlo)</p> <p>10-x484205; y4564885 (Village Sadakhlo)</p> <p>The existing road sections, which will run close the settled areas and will be intensely used for construction purposes.</p>	Measuring noisi propagation with a portable device.	<ul style="list-style-type: none"> During the intense works on relevant site, on a daily basis; in case of complaints 	Roads Department. Construction Contractor under its supervision
	At the border of the stationery sources of noise propagation	Measuring noisi propagation with a portable device.	<ul style="list-style-type: none"> Once a month 	Roads Department. Construction Contractor under its supervision
Vibration propagation	Nearest houses and other objects.	Visual observation of the stability of the residential houses (no cracks identified)	Visual observation of the stability of the residential houses before and after the intense works causing vibration	Roads Department. Construction Contractor under its supervision
	At the nearest settled areas and other sensitive objects, at the	Measuring vibration levels with a portable device.	During the intense works on relevant site, on a daily basi;	Roads Department. Construction Contractor under its supervision

	following presumable points:			
--	------------------------------	--	--	--

	<p>1-x489189; y4578489 (Village Akhali Mmaudlo)</p> <p>2-x488975; y4578545 (Village Araflo)</p> <p>3-x485436; y4577338 (Village Kvemo Sarali)</p> <p>4-x483318; y4574891 (Village Zemo Sarali)</p> <p>5-x482580; y4573114 (Village Akhlo Lalalo)</p> <p>6-x482363; y4572044 (Village Damia Giurarkhi)</p> <p>7-x482700; y4569935 (Village Kirovka)</p> <p>8-x482488; y4569751 (Village Kirovka)</p> <p>9-x483267; y4566547 (Village Sadakhlo)</p> <p>10-x484205; y4564885 (Village Sadakhlo)</p> <p>The existing road sections, which will run close the settled areas and will be intensely used for</p>			
	<p>At the border of the stationery sources of vibration propagation.</p>	<p>Measuring vibration levels with a portable device.</p>	<ul style="list-style-type: none"> Once a month 	<p>Roads Department. Construction Contractor under its supervision</p>
<p>Engineering-geological stability</p>	<p>Sensitive sections identified in the project corridor, including</p> <ul style="list-style-type: none"> From x485874; y4577643 To x484341; y4576277 Crossing points of rivers and gullies, erosion-sensitive sites. <p>From 1-x493874; y4582663 to x493754; y4582257 (Crosisng of River Khrami)</p> <p>2-x483216; y4567166</p>	<ul style="list-style-type: none"> Visual observation; Controlling the efficiency of the protective buildings; Periodic examinations by the geological engineer; Sloepes are stable and no erosion is fixed. 	<ul style="list-style-type: none"> Before the onset of works on relevant site; Every day, during the works; Particularly after the periods with precipitations 	<p>Roads Department. Construction Contractor under its supervision</p>
<p>Soil and ground quality</p>	<ul style="list-style-type: none"> Areas adjacent to the construction camps; Project corridor; Materials and waste storage 	<p>Visual observation:</p> <ul style="list-style-type: none"> No significant oil products spills are identified; Laboratory control 	<ul style="list-style-type: none"> Visual obsrvation at the end of each working day; Laboratory examination - in case of large oil spills 	<p>Roads department</p> <ul style="list-style-type: none"> Visual Observation - by an environmental manager;

	areas; • Corridor of the access road			Laboratory control - with the help of the Contractor.
--	---	--	--	---

Temporal storage of the removed ground and topsoil	<ul style="list-style-type: none"> • Construction corridor; • Ground storage area 	<p>Visual observation:</p> <ul style="list-style-type: none"> • The lower soil layer and topsoil are piled separately; • The height of the topsoil pile does not exceed 2 m; • The inclination of piles does not exceed 45°; • The stored soil is distanced from the water objects; • Soil is temporarily stored at locations preliminarily agreed with the technical supervisor; No erosion or other hazardous processes are observed. 	Every day following the completion of ground works.	Roads department and its Supervision company for Construction
	<ul style="list-style-type: none"> • Construction Contractor's office 	Examining the documented agreement about the temporal use of soil.	Shortly after the ground works are complete	
Vegetation cover	Construction corridor, particularly the section running across Iagluja Plateau, where there are wind-breaking belts and artificial plantings	<p>Visual observation:</p> <ul style="list-style-type: none"> • The works are accomplished within the limits of the designated zone and no additional damage to plants or illegal cutting takes place. 	Visual observation – at the end of the working day;	Roads Department. Construction Contractor under its supervision
Wildlife, including:	<ul style="list-style-type: none"> • Construction corridor, particularly the section running across Iagluja Plateau, 	<p>Visual observation:</p> <ul style="list-style-type: none"> • There are no animal habitats (nest, holes, burrows, etc.) fixed in within the designed working zone; • No harm or death of animals is fixed.. <p>Inspection: No illegal hunting takes place.</p>	<ul style="list-style-type: none"> • Visual observation – daily on every site at the preparatory stage and during the construction works; Inspection – unscheduled. 	Roads Department. Construction Contractor under its supervision

<p>Traces and signs of vital activity of relatively large mammals – jackal, fox, etc.</p>	<ul style="list-style-type: none"> • Construction areas, all along the project road, particularly along the section running across Iagluja Plateau 	<p>Visual observation: If there are signs of the presence of wild animals in the project affected areas;</p>	<p>On every construction ground before starting the work</p>	<p>Roads Department. Construction Contractor under its supervision</p>
<p>Nests of small birds</p>	<p>Construction areas, all along the project road, particularly the areas covered with trees and vegetation, bushes and tall herbaceous cover.</p>	<p>Visual observation: if there are functioning nests in the trees or other sites under the project impact</p>	<p>On the construction ground before starting the work</p>	<p>Roads Department. Construction Contractor under its supervision</p>
<p>Reptiles and their habitation sites, including Mediterranean tortoise, Caspian Turtle and European pond turtle</p>	<ul style="list-style-type: none"> • Construction areas, all along the project road, particularly the areas with high herbaceous cover; • River bank area; • Agricultural plots 	<p>Visual observation: if there are sites of concentration of reptiles in the areas under the project impact</p>	<p>On the construction ground before starting the work</p>	<p>Roads Department. Construction Contractor under its supervision</p>
<p>Holes, trenches and other hazardous places for animals</p>	<ul style="list-style-type: none"> • Construction sites, 	<p>Visual observation: If such sites are duly fenced and how great the animal harm risks are; if there are planks inserted in the holes</p>	<ul style="list-style-type: none"> • At the end of each working day 	<p>Roads Department. Construction Contractor under its supervision</p>
<p>Efficiency of impact prevention and compensation measures</p>	<p>Construction sites,</p>	<p>The environmental manager will supervise the observance of the safety and environmental protection standards by the personnel and efficiency of such measures. If necessary, he will apply to the high management to plan and realize additional measures.</p>	<ul style="list-style-type: none"> • During the intense construction works; • Inspection - periodically. 	<p>Roads Department. Construction Contractor under its supervision</p>

Management of industrial and fecal waters	Construction camps	<ul style="list-style-type: none"> • Discharging the industrial and fecal waters into the assenization pools; • The assenization pools are cleaned and their technical state is satisfactory; • No untreated wastewater is discharged into the rivers; 	<ul style="list-style-type: none"> • Visual observation – during each working day 	Roads Department. Construction Contractor under its supervision
Waste management	<ul style="list-style-type: none"> • Construction camps; • Construction corridor; • Temporal storage sites of waste 	<p>Visual observation:</p> <ul style="list-style-type: none"> • The sites of temporal waste disposal are assigned in the construction area and are duly marked. • The storage areas for hazardous waste are protected against the penetration of strangers and against the weather impact; • On the territory, at due locations, there are marked containers to collect domestic waste. • The sanitary condition of the territory is satisfactory - no dissipated waste is observed. • The waste is not stored on the territory for long. • The spoil ground is stored in line with the project for spoil ground planning. 	<ul style="list-style-type: none"> • Visual observation - at the end of each working day; 	Roads Department. Construction Contractor under its supervision

	<ul style="list-style-type: none"> • Construction Contractor's office 	<ul style="list-style-type: none"> • Checking the waste registration log; • Checking the documented agreement about waste disposal 	Document check - once a month	Roads Department. Construction Contractor under its supervision
Oil and oil products management	<ul style="list-style-type: none"> • Construction camps; • Storage sites 	<p>Visual observation:</p> <ul style="list-style-type: none"> • Protected sites are allotted for oil, oil products and other liquid substances and are marked; <p>The perimeter of the reservoirs is duly bordered, what in case of emergencies, will retain spilled mass.</p>	<ul style="list-style-type: none"> • Visual observation - at the end of each working day; 	Roads Department. Construction Contractor under its supervision
Technical state of the access road, possibility of free movement	<ul style="list-style-type: none"> • Corridors of the transportation roads 	<p>Visual observation:</p> <ul style="list-style-type: none"> • The vehicles move along the routes specified in advance, bypassing the settled areas as far as possible. • The state of the driving routes is satisfactory. • Free movement is not limited. • Driving speeds are observed. 	During the intense transportation operations	Roads Department. Construction Contractor under its supervision
Occupational Health and Safety	<ul style="list-style-type: none"> • Working area 	<p>Visual observation:</p> <ul style="list-style-type: none"> • The territory is fenced and protected against the illegal penetration of strangers, • The personnel are equipped with PPE. • The technical state of the exploited equipment and mechanisms is satisfactory. 	<ul style="list-style-type: none"> • Visual observation- before the onset of each working; 	Roads Department. Construction Contractor under its supervision

		<ul style="list-style-type: none"> • Electrical and fire safety is ensured. • The safety, prohibiting and information signs are installed on the territory and along its perimeter. • There is a banner on the territory with the basic safety rules. Smoking areas are specially assigned. 		
		<ul style="list-style-type: none"> • Unscheduled control (Inspection): • The personnel observe the safety rules and use the PPE. 	<ul style="list-style-type: none"> • Inspection - regularly. 	Roads Department. Construction Contractor under its supervision

9.3 Environmental Monitoring Plan – Operation Phase

What? (Is the parameter to monitor)?	Where? (Is the parameter to monitor)?	How? (Must the parameter be monitored)?	When? (Frequency or duration of monitoring)	Who? (Is responsible for monitoring)?
1	2	3	4	5
Hazardous geological processes	<ul style="list-style-type: none"> • Sensitive sections in the main road corridor; • Sites of the protective buildings • Bridge piers locations 	<ul style="list-style-type: none"> • Visual observation; • Controlling the efficiency of the protective buildings. • 	<ul style="list-style-type: none"> • Twice a year, at the end of winter and in autumn 	Roads Department
Vegetation cover	<ul style="list-style-type: none"> • Vegetation in the RoW. 	<ul style="list-style-type: none"> • Visual observation 	<ul style="list-style-type: none"> • Several times a year 	Roads Department
Safe drive	<ul style="list-style-type: none"> • In the road corridor 	Visual observation: <ul style="list-style-type: none"> • Checking the presence of the relevant road signs; Examining the technical state of the road cover. 	<ul style="list-style-type: none"> • Several times a year; 	Roads Department
Proper operation of drainage systems	<ul style="list-style-type: none"> • In the road corridor 	<ul style="list-style-type: none"> • Examining the technical state of the drainage system. 	<ul style="list-style-type: none"> • Several times a year; 	Roads Department
Proper operation of the underpasses for people and animals under the road	<ul style="list-style-type: none"> • In the road corridor 	<ul style="list-style-type: none"> • Examining the technical state of the viaducts 	<ul style="list-style-type: none"> • Several times a year 	Roads Department
Waste	<ul style="list-style-type: none"> • In the road corridor 	Visual observation:	<ul style="list-style-type: none"> • On a periodic basis 	Roads department and its Supervision company for Construction

10. PUBLIC CONSULTATION AND GRIEVANCE REDRESS MECHANISM

10.1 Information disclosure and andpublic consultations

Aiming at organizing an information campaign within the scope of Algeti-Sadakhlo Road Construction/Improvement Project, the Consultant's social group prepared an information leaflet, which was agreed with the Environmental Protection Team of the Roads Department of Georgia.

Prior to the onset of the information campaign, the concerned parties and legal and private entities were identified on whom project implementation would or could have a positive or negative impact. The concerned parties were represented by the representatives of the local authorities, non-governmental sector and local population, who live or run business in the project zone or adjacent to it. The project implementation will also have an impact on the population living along the sections of the existing road to be bypassed by the designed highway after the project is implemented. The local population along the given road section ran both, legal and illegal businesses receiving certain profits. This population mostly used to trade with their own harvest and other essential commodities, or ran small catering objects.

On May 3-4 of 2018, the Consultant's social group met with the representatives of both, non-governmental and governmental local self-government authorities. The goal of the meeting was to communicate the details, goals and objectives of the planned project to the representatives of the local authorities and learn about their views and expectations in respect of the project.

On May 3, meetings were held with Mr. Zaur Tabatadze, the First Deputy of the Mayor of the city of Marneuli (Figure 10.1.1) and Mr. Anzor Abashidze, acting as a Gamagebeli (superior) in village Shulaveri (Figure 10.1.2).

Figure 10.1.1: A meeting with Mr. Zaur Tabatadze, the First deputy of the Mayor of the city of Marneuli



Figure 10.1.2. A meeting with Anzor Abashidze, acting as a Gamagebeli (superior) of village Shulaveri



At the meetings, the representatives of the local self-governing bodies showed a full support of the project. In their opinion, this project will promote the development of the region, will support agriculture, which is one of the leading branches in the region and will help increase the budget consequently. All these benefits will have a positive impact on the youth of the region and will reduce the immigration, which is one of the major problems of Marneuli municipality today.

In addition, the representatives of the self-governing bodies stated about their wish to engage the local population in the construction works to the extent possible.

Within the scope of the construction campaign, a meeting was also held with the representatives of the local non-governmental sector, who work on the severe problems in the region, gender issues and migration of the young people in particular. The meetings were held with Rena Nurmamedova, one of the leaders of the “Marneuli Youth Center” (Figure 10.1.3) and Olga Endeladze, the head of “Democrat Women of Marneuli” (Figure 10.1.4).

Figure 10.1.3. A meeting with non-governmental organization “Marneuli Youth center”



Figure 10.1.4A meeting with the head of “Democrat Women of Marneuli”



As it became clear at the meetings, both problems - the migration of the young people and gender issues - are quite severe in the region and need urgent response. At the meetings, the representatives of the non-governmental sectors stated about some of their wishes and opinions regarding the solution of the problems. At the project planning and implementation stages, in their opinion, the major attention must be paid to the following issues:

- a. The expected negative project impact on the population must be studied in details and a fair compensation plan must be developed.
- b. To the extent possible, the population must be informed about the current project and the population must be given a clear understanding of the advantages of the project.
- c. The local workers must be employed to the extent possible at the project implementation stage.
- d. The women’s wishes and expectations are desirable to study on their own at the project implementation stage.
- e. As Ms. Rena Nurmamedova explained, a gender problem is one of the major issues in Marneuli municipality, particularly, among the Azerbaijani population. Following the century-long traditions, it is very difficult not only to protect the women’s rights, but also to obtain the information.
- f. As per the primary plan developed by the Consultant during the implementation of the information campaign, the meetings were to be held in the villages, which were to be crossed by the Highway or where the Highway ran near a village or a settled area. After the meetings, it was decided that the information campaign would be given larger scales and the information would be disseminated among more people, particularly among the women living in the region. It was also decided to try and find additional ways to receive information from them.

On May 16, 2018, a meeting at “Radio Marneuli” broadcasting office was held (**Figure 10.1.5.**) and a live transmission all over the Municipality was planned. The goal of the broadcast was to inform the local population about the project and allow them to give questions to the Consultant’s representative interesting them through the live transmission. Under the agreement, the representatives of the radio broadcast permanently announced about the broadcast and its format prior before the broadcast started.

Aiming at considering the said project, on May 18 of 2018, 1-hour-long live transmission was held from “Radio Marneuli” office **Figure 10.1.6.**, where Mr. R. Revazishvili, the representative of the Consultation Company “Eco-Spectri” Ltd. was invited. The broadcast was totally dedicated to the project review. The listeners were given the thorough information about the essence and goals of the project. Technical, environmental and social aspects of the project were considered both, in the regional and country-specific views. During the broadcast, all the questions were answered thoroughly. The radio broadcast as possible to listen beyond the borders of the region as well.

Figure 10.1.5: Negotiation at Marneuli radio broadcasting office



10.1.6: On the air



Within the prepared information campaign, the Consultation Company held some additional meetings in the villages and settled areas adjacent to the project zone. Within the scope of the said campaign, not only the population was informed about the planned activities, but the information about the population’s opinions and wishes were gathered as well. The photos below depicting the meetings with the local population of the villages and settled areas adjacent to the project zone and the process of distributing the information leaflets.

Figure 10.1.7: A meeting with the population



Figure 10.1.9: A meeting with small business representatives



Figure 10.1.8: A meeting with the population

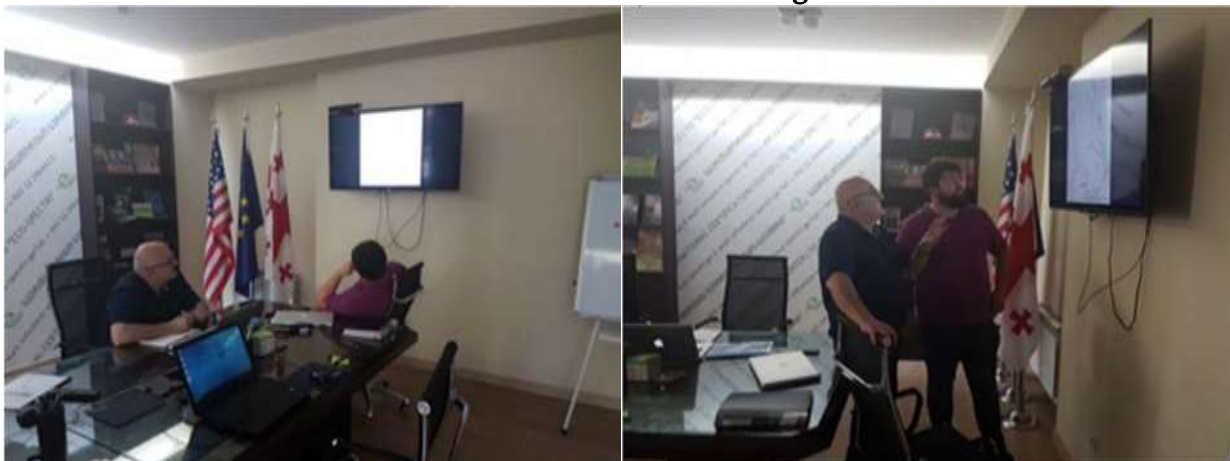


Figure 10.1.10: A meeting with the population



One of the economic branches in Marneuli Municipality is sheep-breeding. Following the branch specifics, the sheep is driven to and from the summer pastures twice a year. The route of the sheep drive is developed by the state and is used by all private business representatives. The route of driving the sheep, as the preliminary data suggest, is located adjacent to the project zone and consequently, there was a risk of the project road to cross the sheep driving route. In order to clarify this issue better, the Consultant met with Mr. Beka Gonashvili, the President of the Sheep's Association of Georgia. The meeting was held on May 15, 2018 at the Consultant's office (**Figure 10.1.11**). As it was clarified during the meeting, the given route of the sheep driving did not cross the project zone, but was distanced from it by 1-1,5 km.

Figure 10.1.11: A meeting with Mr. Beka Gonashvili, the President of the Sheep's Association of Georgia



Within the scope of the project, the Scoping Report required by the legislation of Georgia was also prepared and submitted to the Ministry of Environment Protection and Agriculture of Georgia.

Public hearing was organized by the Ministry:

October 16, 2018, 14:00, Administrative Building of Marneuli Municipality, Rustaveli Street, #73

The Scoping Report and relevant detailed information regarding the planned activity was available at the following address:

- Ministry of Environment Protection and Agriculture of Georgia, address; #6, Marshal Gelovani Avenue, Tbilisi.
- Marneuli Municipality, address: Rustaveli Street, #73; Tel: (0357) 22 33 21, e-mail: municipaliteti@marneuli.gov.ge

The responses to the issues presented by the Ministry of Environment Protection and Agriculture of Georgia are given in Annex 1.

As per the information gathered as a result of the held information campaign, the following mitigation measures and recommendations were developed related to social issues within the scope of the project:

1. Regarding the employment of the local staff, the following requirements are to be envisaged in the contract to be concluded with the construction Contractor: (i) in case of equal qualification, advantage should be given to the local staff for the employment purposes within the scope of the project, and (ii) 70% of the non-qualified labor should be the local staff.
2. At the stage of developing the Resettlement Action Plan, a particular attention should be paid to the current business along the section of the Highway where the traffic flow is expected to decrease. The business incomes are expected to reduce along these sections for the business owners.
3. As regards the gender problems, the Construction Contractor and/or Consultant must develop a gender plan within the scope of the project both, in the project implementation and operation

phases. The local non-governmental organizations are to be engaged in the plan development process.

4. Following the safety and technical standards requirements, trading with agricultural products by the local people is prohibited adjacent to the Highway. Consequently, the population, who gains certain benefit through such a business, will lose their incomes. Within the scope of the project, it is necessary to plan the construction of the organized trade center(s) adjacent to the project highway so that the population should not lose sources of income. The compensation for the business suspension must be considered as the last alternative and this decision must be clearly grounded in the Resettlement Action Plan.

10.2 Grievance Redress Mechanism

During implementation of the Project, there might be several issues related to environmental and social hazards and disputes on entitlement processes occurred due to the Project activities. A Grievance Redress Mechanism will be set up for the Project to deal with both the environmental and social issues of the Project.

The present chapter specifies the procedures of establishing Grievance Redress Mechanism (GRM) and its structure and composition. The Safeguard Units of the IA has important role for establishing the GRM.

The GRM consists of temporary, project-specific units established at the municipal level in project affected municipalities and regular system established at IA. *Grievance Redress Committee (GRCE)* established at municipal level as a project-specific instrument, which is functional only for the period of the project implementation. *Grievance Redress Commission (GRCN)* is formed as permanently functional informal structure within the IA to ensure grievance review, resolution and record.

Grievance Redress Commission at implementing organizations/agencies

Grievance Redress Commission (GRCN) is formed by the order of the Head of RDAs a Grievance Redress Commission (GRCN) is formed by the order of the Head of RDMRDI as a permanently functional informal structure, engaging personnel of RDMRDI from all departments having regard to the environmental and resettlement issues and complaint resolution. This includes top management, Environmental and Social Safeguards Units, Legal Departments, PR department and other relevant departments (depending on specific structure of the IA). The GRCN is involved at the Stage 2 of grievance resolution process. The Order shall also state that if necessary representative of local authorities, NGOs, auditors, representatives of APs and any other persons or entities can be engaged in a work of GRCN.

The following members are proposed for GRCN (Table 10.2.1):

Table 10.2.1: Membership of the Grievance Redress Committee

(i) Management of the implementing organization/agency	:	Member
(ii) Head of the environmental and social security department	:	Member
(iii) Legal department of the implementing organization/agency	:	Member
(iv) PR Department of the implementing organization/agency	:	Member
(v) Relevant departments of the implementing organization/agency	:	Member

Project-specific Grievance Redress Committee at Municipal Level

Grievance Redress Committee (GRCE) is an informal, project-specific grievance redress mechanism, established to administer the grievances at Stage 1. This informal body will be established at community level in affected Municipality. The GRCE shall include representatives of Municipal LAR Teams and local communities. The GRCE shall include representatives of Municipal LAR Teams and local communities. The RD representative in the Municipal LAR Team shall coordinate the GRCE formation.

He/she will then be responsible for the coordination of GRC activities and organizing meetings. In addition, GRCE shall comprise village Rtsmunebuli or his/her representative, representatives of APs, women APs (if any), and appropriate local NGOs to allow voices of the affected communities to be heard and ensure a participatory decision-making process.

A **Grievance Redress Committee** (GRCE) is formed at the level of the local people (official representative's office in the Municipality and head of the Municipality Sakrebulo⁴). The formation of the **Grievance Redress Committee** (GRCE) is officially registered by the first session protocol by mentioning the Land Acquisition and Resettlement Frame document (LARF) and Environmental Assessment Frame document (EARF), as an inseparable part of the agreement concluded between the government and the ADB. The following membership of the **Grievance Redress Committee** (GRCE) is proposed (Table 10.2.2):

Table 10.2.2: Membership of the Grievance Redress Committee (GRCE)

(i) Representative(s) of the environmental protection and resettlement department of the implementing organization/agency	:	Meeting convener; contact person(s)
(ii) Sakrebulo representative	:	Member, secretary
(iii) Representative of Gamgebeli of the region to relevant Municipality (village/Municipality level)	:	Chairman
(iv) Representative of the project affected people (AP)	:	Member
(v) Representative of an NGO ⁵	:	Member

⁴ Sakrebulo is a local elected self-governing body (local parliament) and the representative of Gamgebeli in the Municipality is the Executive Authority.

⁵ In case of AP's wish and presence of such NGOs in the region.

(vi) Construction works implementing contractor's representative	:	Member
(vii) Environmental and resettlement/social security specialists of the Supervisory Consultant	:	Member

Representative of the Resettlement and Environment Division of RD (Meeting convener; contact person) is coordinating the work of the Committee and at the same time he/she is nominated as a contact person for collecting the grievances and handling grievance log.

The local authorities at the municipal level, civil works Contractor, Supervising Company (Engineer), as well as APs (through informal meetings) will be informed about the contact person and his contact details are available in offices of all mentioned stakeholders.

The local authorities at the municipal level, civil works Contractor, Supervising Company (Engineer), as well as IP (through informal meetings) will be informed about the contact person and his contact details are available in offices of all mentioned stakeholders.

The APs should be informed about the available GRM. This could be achieved through implementing information campaigns, distributing brochures (e.g. Communication Plan), keeping all focal points up-to-date & maintaining regular communication with them, allowing multiple entry points for complaints, introducing forms for ease of reporting complaints.

10.3 Grievance Redress Procedures

Brief description of all stages of Grievance Resolution Process are given in the 10.3.1

Table 10.3.1: Grievance Resolution Process

Steps	Action level	Process
Stage 1 (GRCE Level)	Step 1: Informal negotiations with APs	The complaint is informally reviewed by the GRCE Contact Person – Representative of Environmental and Resettlement Unit of IA/PIU, which takes all necessary measures to resolve the dispute amicably. At this stage, Contact Person engages in discussions with AP only those members of the GRCE, who have direct relation to the issue.
	Step 2: Formal negotiations with APs GRCE level resolution of grievance	<p>If the oral grievance is not solved during the negotiations, the GRCE will assist the aggrieved APs to formally lodge the grievances to the GRCE.</p> <p>The aggrieved APs shall submit their complaints to the GRCE within 1 week after completion of the negotiations at the village level or later, as he wishes. The aggrieved AP shall produce documents supporting his/her claim. The GRCE Contact Person will review the complaint and prepare a Case File for GRCE hearing and resolution. A formal hearing will be held with the GRCE at a date fixed by the GRCE Contact Person.</p> <p>On the date of hearing, the aggrieved AP will appear before the GRCE at the Municipality office for consideration of grievance. The member secretary will note down the statements of the complainant and document all details of the claim.</p> <p>The decisions from majority of the members will be considered final from the GRCE at Stage 1 and will be issued by the Contact Person/Convenor and signed by other members of the GRCE. The case record will be updated and the decision will be communicated to the complainant AP.</p>

¹⁵ In case of AP's wish and presence of such NGOs in the region.

Steps	Action level	Process
<p style="text-align: center;">Stage 2</p>	<p>Step 3 Decision from central IA/PIU GRCN</p>	<p>If any aggrieved AP is unsatisfied with the GRCE decision, the next option will be to lodge grievances to the IA/PIU at the national level. GRCE should assist the plaintiff in lodging an official complaint to GRCN (the plaintiff should be informed of his/her rights and obligations, rules and procedures of making a complaint, format of complaint, terms of complaint submission, etc). The aggrieved AP shall produce documents supporting his/her claim, in accordance with the legal requirements (Administrative Code of Georgia). The GRCN of the IA shall review the complaint in compliance with the procedures specified in the Administrative Code of Georgia.</p> <p>If needed, a formal hearing will be held with the GRCN at a date fixed by the GRCN member secretary. On the date of hearing, the aggrieved AP will appear before the GRCN at the IA office for consideration of grievance. The Contact person will note down the statements of the complainant and document all details of the claim.</p> <p>The plaintiff shall be informed of the decision.</p>

Steps	Action level	Process
Stage 3	Step 4 Court decision	<p>If the IA/PIU decision fails to satisfy the aggrieved APs, they can pursue further action by submitting their case to the appropriate court of law (Rayon Court).</p> <p>The aggrieved AP can take a legal action not only about the amount of compensation but also any other issues, e.g. occupation of their land by the contractor without their consent, damage or loss of their property, restrictions on the use of land/assets, etc.</p>

10.4 Grievance Log

The Grievance Logs will be developed at both – GRCE and GRCN levels.

The Grievance Logs will be developed and managed by the RD representative at site (Convenor of the GRCE/Contact Person) and will be kept at site (in the IA/PIU office or Engineer’s office).

The records in Grievance logs include the following information:

- Name and contact details of the claimant
- Date of receiving claim
- Form of claim – (oral or written)
- To whom the claim has been addressed initially (entry point)
- The brief description of the essence of claim
- the stages, dates and participants of negotiations with the AP with GRCE (stage 1)
- Minutes of meetings
- Final decision of the GRCE (in case of the dispute is resolved, the decision is about closure of the issue. In case if the dispute remains unresolved, the decision is about passing to the stage 2 of the grievance redress process)
- Date of decision of GRCE
- Documents prepared by AP with the help of GRCE for passing to GRCN

The copies of the records/documents may be also kept in the municipal office.

11. CONCLUSIONS

Based on results of the conducted Environmental Impact Assessment the following conclusions could be done:

1. The activity considered by the EIA report envisages the modernization of Algeti-Sadakhlo Highway up to Sadakhlo border checkpoint (border of Armenia). For this purpose, a 30-km-long new corridor will be provided from Algeti to Sadakhlo. The activity implementer is the Roads Department of Georgia;
2. The EIA report was developed by considering the requirements of the national legislation and environmental policy of the International financial Organizations.
3. The EIA report will consider several alternative options of the project implementation. including no-action option and 3 alternative options of the alignment. Besides, by considering the local social conditions, two additional alternatives were considered: 2A and 2B and the option best in an environmental respect was selected;
4. The project highway meets the international standards. It is designed for 120 km/h design speed;
5. Within the limits of the Highway, relevant project structures are envisaged, including river and railway bridges, underpass viaducts, water pipes drainage systems and anti-erosive structures;
6. Temporary construction infrastructure will be provided to carry out the construction works, which will be further specified by the construction contractor and agreed with relevant state structures if required;
7. The local (secondary) roads are quite well developed in the project area and consequently, no efforts are needed to construct new temporary roads;
8. The corridor of the considered section of the highway is not distinguished for the morphological or geological diversity. There are no highly sensitive areas in respect of hazardous geodynamic processes observed in the corridor. The relief is satisfactory almost all its length and consequently, no significant change in the geological environment is expected during the construction works. Particular attention must be paid to the risks of bogging and temporary and permanent drainage systems will be used for this purpose;
9. During the construction works, there will be stationary and mobile sources of atmospheric emissions of harmful substances, vibration and noise propagation in the project corridor. By considering the relevant mitigation measures, the impact on the natural environment and population will not be significant. In the exploitation phase, it may become necessary to make noise barriers along some sections;
10. The biological environment of the project corridor is not distinguished for sensitivity. The degree of naturalness of the vegetation cover and habitats is very low and is disturbed by intense human activities. The corridor does not cross important forested areas. therefore, the expected impact on the biological environment must be assessed as low. Despite this, relevant mitigation and compensation measures will be considered;

11. The project corridor will not cross and will not run near the protected areas
12. The project corridor crosses several rivers and gullies. Therefore, there are certain risks of impact on surface waters in the construction phase. The risks can be prevented by proper waste management and minimization of the unforeseen events;
13. A major part of the project corridor runs across the agricultural plots with a soil cover with quite a strong humus layer. Therefore, simultaneously with the project implementation, the Construction Contractor will take relevant measures to protect soil fertility;
14. Impact on visible historical-cultural monuments will be insignificant;
15. Despite the near location of the borderline, no important negative transboundary impact is expected
16. The EIA Report considers the issue of a cumulative impact. As per the relevant analysis, the cumulative impact will not be high;
17. The project implementation will be associated with the need for the physical and economic resettlement, and a Resettlement Action Plan (RAP) will be developed in this connection. All affected people will be provided with relevant compensation package;
18. Before the commencement of the construction works, particularly along the sections where the design road buffer crosses the existing highway and rural roads. Therefore, the proper organization of the construction works will be needed. Prior to the onset of the construction works a traffic flow management plan is to be developed, which will be agreed with all concerned parties.
19. As a result of the highway modernization, a high positive social and economic impact is expected. The project will be a factor significantly promoting the sustainable economic development of the country. The traffic with neighboring country will improve what will activate touristic and trade trips between the two countries. The number of car accidents and risks of traffic limitation will be reduced a lot;
20. The EIA report gives the Environmental Management Plan and Environmental Monitoring Plan. In terms of realizing the measures envisaged by the given plans, the expected impacts will be it will be lower than average;.

Simultaneously with the activities, the environmental protection measures envisaged by the Georgian legislation and given in the EIA report will be accomplished, with the following basic measures:

- The obligations envisaged by the terms of the Permit and mitigation measures envisaged by the EIA report will be realized.
- The measures envisaged by the Waste Management Plan will be realized. The question of arranging the landfills will be agreed with the local authorities.
- In case of the population's claims, all possible measures to meet their complaints will be realized.
- After the construction works are over, the improved areas will be cleaned, the materials and waste will be removed and the damaged sites will be restored and cultivated.
- The Implementing Agency (the Roads Department) will strictly control the discharge of the obligations by the construction and contacting companies;

-
- The information about the occurrence of any significant unforeseen environmental problems will be communicated to the Ministry of Environmental Protection and Agriculture of Georgia (MoEPA).

12. REFERENCE

1. Law of Georgia on the Protection of Atmospheric Air;
2. Decree N42 of the Government of Georgia “On approving the technical regulation of inventory of the stationery sources of atmospheric air pollution” of January 6, 2014;
3. Order №408 of the Government of Georgia”On approving the Technical Regulation “Methods of calculation of maximum permissible emission of hazardous substances into ambient air”;
4. Decree N38/N of the Ministry of Labor, Health and social Affairs of Georgia “On approving the standards of qualitative state of the environment” of february 24, 2003;
5. Decree № 1-1/1743 of the Minister of Economic Development of Georgia of August 25, 2013 “Building climatology of design standards”;
6. Order №435 of the Government of Georgia “On approving Technical Regulation – “Methods of calculating the actual amount of emissions according to instrumental methods for determining the actual amount of emissions in ambient air from stationary sources of pollution, list of special measuring and controlling equipment for determining the actual amount of emissions in ambient air from stationary sources of pollution and technological processes from stationary pollution sources”;
7. Методическое пособие по расчету, нормированию и контролю выбросов загрязняющих веществ в атмосферный воздух», СПб.,2002
8. Методика проведения инвентаризации выбросов загрязняющих веществ в атмосферу автотранспортных предприятий (расчетным методом). М,1998.
9. Расчет выделений загрязняющих веществ выполнен в соответствии с «Методические указания по определению выбросов загрязняющих веществ в атмосферу из резервуаров». Новополюцк, 1997 (с учетом дополнений НИИ Атмосфера 1999, 2005, 2010г.г.).
10. Методическим пособием по расчету выбросов от неорганизованных источников в промышленности строительных материалов», Новороссийск, 2001; «Методическим пособием по расчету, нормированию и контролю выбросов загрязняющих веществ в атмосферный воздух», СПб., 2005 12. УПРЗА ЭКОЛОГ, версия 3.00 ФИРМА "ИНТЕГРАЛ" Санкт- Петербург 2001-2005г.
11. Gamkrelidze I., Gamkrelidze M., Loladze M., Tsamalashvili T. (2015). New Tectonic Map of Georgia (Explanatory Note). Bull. Georg. Natl. Acad. Sci., vol. 9, no.1.
12. Ministry of Environment Protection (2008): Regulation “On Calculation Method for Acceptable Limits and/or Temporarily Agreed StandardsofEmissionsofHarmfulSubstancesintoAir”; OrderNo.705,20/10/2008.
13. Ministry of Labour, Health Care and Social Affairs (2003): Acceptable limit concentrations of pollutants in atmospheric air of residential areas, hygiene standards; “On Approval of Qualitative Environmental Standards”; Order No 38/n24/02/2003.
14. Aarhus Centre Georgia (2008): Guidelines on how to obtain the permit for Environmental Impact Assessment from the Ministry of Environment Protection of Georgia, Updated 7 April, 2008. Tbilisi, Aarhus Centre, Georgia.
15. Red List of Georgia. Decree #303 of the President of Georgia, May 2, 2006
16. Bukhnikashvili A. 2004. Materials for the Cadastre of Small Mammals of Georgia (Insectivora, Chiroptera, Lagomorpha, Rodentia) . Publishing House Universali, Tbilisi, p. 144.
17. Gurielidze Z. 1996. Medium and large mammals. In book: “Materials of biodiversity program of Georgia”, Tbilisi:74-82.
18. Kutubidze M. 1985. Guidebook of the Birds of Georgia. TSU Publishing House, Tbilisi, p. 645.
19. Janashvili A., 1973. Fauna of Georgia. v. III, Vertibrates, TSU Publishing House, Tbilisi, p. 460.
20. Верещагин Н.К. 1959. Млекопитающие Кавказа. История формирования фауны // Изд. АН СССР, М.-Л. : 703с.
20. Гаджиев Ф.А. 1986. Животный мир. В кн.: Г. Габриелян (ред.), Физическая География Закавказья. Ереван, изд-во Ереванского гос.Ун-та.

21. Девдариани Г.С. 1986. Закавказская депрессия. В кн.: Г. Габриелян (ред.), Физическая География Закавказья. Ереван, изд-во Ереванского гос.Ун-та.
22. Мусеибов М.А., Назарян Х.Е., Габриелян Г.К., Джакели Х.Г. 1986. Физико-географическое зонирование. В кн.: Г. Габриелян (ред.), Физическая География Закавказья. Ереван, изд-во Ереванского гос.Ун-та.
23. МухелишвилиТ.А.1970.ПресмыкающиесяВосточнойГрузии.Мецниереба,Тбилиси:241.
24. ЯблоковаВ.,ОстроумовС.А.1985.Уровниохраныживойприроды.М.:Наука:176с. 26.
25. N. Ketskhoveli, A. Kharadze, R. Gagnidze. "Flora of Georgia", vol. I-XIV, 1987-1996. 27. R. Gagnidze, List of Plant Nomenclature, 2005.

13. ANNEXES

13.1 Annex 1. Responses to the questions specified by scoping opinion of the Ministry of Environment Protection and Agriculture of Georgia

1.	The EIA Report must incorporate: the information established under Part 3 of Article 10 of the Environment Assessment Code of Georgia	The EIA Report incorporates the information established under Part 3 of Article 10 of the Environment Assessment Code of Georgia. The Report is enclosed by the relevant documentation.
2.	The EIA Report must be enclosed by: the documentation specified by Part 4 of Article 10 of the Environment Assessment Code of Georgia	The EIA Report incorporates the information established under Part 4 of Article 10 of the Environment Assessment Code of Georgia. The Report is enclosed by the relevant documentation.
3.	The EIA Report must present the results of the studies (specified, obligatory) under the Scoping Report, obtained and studied information, impacts studied thoroughly during the EIA process and relevant reduction/mitigation measures	Individual paragraphs of the EIA Report incorporate the said information.
4.	Substantiation of the project need	This issue is given in Paragraph 3.1 of the EIA Report
5.	Project description	This issue is given in Paragraph 4 of the EIA Report
6.	Description of the project road infrastructural objects	This issue is given in Paragraph 4 of the EIA Report
7.	Principal technical parameters of the project road	This issue is given in Paragraph 4 of the EIA Report
8.	Shp files of the objects of the project road, spoil grounds and construction camp	Attached to the electronic version of the documentation.
9.	Distance of the axis of the project road from the settled areas by specifying concrete distances	The required issue is given on Drawing 4.1.3. of the EIA Report
10.	Issue related to the construction of bridges and auxiliary buildings	This issue is given in Paragraph 4.5 of the EIA Report
11.	Information about providing concrete works, foundations and bridge structures	This issue is given in Paragraph 4.5 of the EIA Report. See also some sub-chapters of Para 4.
12.	Number of road interchanges	This issue is given in Paragraph 4.4 of the EIA Report
13.	Information about the providing passages, drainage channels, profiling and lateral drainage pipelines/ditches	This issue is given in Paragraphs 4.6 and 4.8 of the EIA Report
14.	Construction of the pedestrian passages	This issue is given in Paragraph 4.6 of the EIA Report

15.	Information about the geometrical parameters, road pavement and cross sections	This issue is given in Paragraphs 4.2 and 4.7 of the EIA Report
16.	Project alternatives in details: with relevant substantiation, including No-Action alternative, alternative locations of the project road infrastructural objects and detailed description of the alternative selected and substantiated in an environmental respect	This issue is given in Paragraphs 3 of the EIA Report
17.	Issues related to the need and construction of the access road	This issue is given in Paragraph 4.10.8 of the EIA Report
18.	Detailed information about stripping the vegetation and soil cover, ground works and recultivation works (by meeting the requirements of Technical Regulation “On topsoil stripping, storage, use and recultivation”);	Paragraph 4.10.9 of the EIA Report states that Decree №424 of the Government of Georgia Technical Regulation – on “Topsoil Removal, Storage, Use and Cultivation was used as the guiding document for recultivation works, also please see Paragraph 4.10.2., 7.5 and 7.6.2.
19.	The sequence of the construction of the project road, as well as their infrastructure (by showing the terms);	This issue is given in Paragraph 4.10 and 4.10.10. of the EIA Report
20.	Total number of people employed for the construction of the project road, including the percentage ration of the locals	This issue is given in Paragraph 4.10 of the EIA Report
21.	The list and quantities of the techniques to use in the construction	This issue is given in Paragraph 4.10.13 of the EIA Report
22.	The sites where the temporary and final disposal of spoil ground useless for construction is planned, in particular, the coordinates of the locations of spoil ground disposal (spoil grounds) and relevant design documentation	This issue is given in Paragraph 4.10.2 of the EIA Report and in annex, on CD
23.	The sites where the inert materials needed for the construction of the road will be extracted	This issue is given in Paragraph 4.10.4. of the EIA Report
24.	Information about the objects manufacturing construction materials	This issue is given in Paragraph 4.10 of the EIA Report
25.	Issues related to the extraction of the inert materials needed for construction	This issue is given in Paragraph 4.10.4. of the EIA Report. The inert materials will be obtained in line with the terms of the relevant license
26.	The issues the manufacturing of raw materials (asphalt, cement, etc.) are planned	This issue is given in Paragraph 4.10. of the EIA Report
27.	General layout of the construction camp	The General layout of the construction camp is given on Drawing 4.10.1.1. of the EIA Report
28.	Coordinates and area of the camp site	The information about the construction camps is provided in Para 4.10.1 of the EIA Report
29.	Description of the water supply project with relevant drawings showing the way the construction camp supply with drinking and economic water (individually or from the water supply system)	The information about the construction camps is provided in Para 4.10.1 of the EIA Report


30.	The way the issue of discharge waters originated at the camp will be solved; capacity of the cesspit planned on the territory; if there are sedimentation ponds for the industrial discharge waters; type and capacity of the fuel reservoir to be installed on the main construction camp	The information about the construction camps is provided in Para 4.10.1 of the EIA Report. See also Para 4.10.5.
31.	Geology of the project site	The required information is given in Paragraph 5.2.2. of the EIA Report
32.	General geological map of the Region	The required information is given in Paragraph 5.2.2. of the EIA Report
33.	Relief (geomorphology)	The required information is given in Paragraph 5.2.2. of the EIA Report
34.	Engineering-geological map, engineering-geological sections of the project corridor	The required information is given in Paragraph 5.2.2. of the EIA Report
35.	Description of geomorphologic, geological, hydrogeological, hydrological, climate-meteorological, seismic and tectonic conditions of the project area	The required information is given in Paragraph 5.2.2. of the EIA Report
36.	The results of the engineering-geological studies accomplished in the project corridor. Attention must be paid to the locations of sites complex in respect of development of hazardous geodynamic processes (landslides, erosion, rock fall) in the project corridor. The necessary preventive measures must be listed (protective structures, slope terracing, etc.)	The required information is given in Paragraph 5.2.2. of the EIA Report
37.	Plan of the pre-construction detailed engineering-geological studies (number of boreholes, their location, laboratory studies, results of the ground laboratory study, etc.)	The required information is given in Paragraph 5.2.2. of the EIA Report
38.	Conclusions and recommendations developed by considering the results of the geological studies	The required information is given in Paragraph 5.2.2. of the EIA Report
39.	Hydrology of rivers Khrami and Debeda	The required information is given in Paragraph 5.2.4. of the EIA Report
40.	Detailed information about peak discharge, low-water discharge, solid drift	The required information is given in Paragraph 5.2.4. of the EIA Report
41.	Information about erosive processes and as necessary, about the anti-erosive measures, bed processes and bank reinforcement works	The required information is given in Paragraphs 4.8 and 7.3.3. of the EIA Report


42.	Biological environment: Detailed description of flora and fauna in the project area; Georgian Rare and Red-Listed species occurring in the planned project corridor; land fauna; Georgian Red-Listed animal species common in the project corridor; study area and field study methods, sensitive sites, field study results	The required information is given in Paragraph 5.3. of the EIA Report
43.	Impact on atmospheric air in the construction and operation phases, emissions from the operation of the construction techniques, calculation of emissions from the construction materials production plants	The required information is given in Paragraph 7.1. of the EIA Report
44.	Noise propagation and expected impact in the construction and operation phases and relevant mitigation measures	The required information is given in Paragraph 7.2 of the EIA Report
45.	Impact on geological environment in the construction and operation phases and relevant mitigation measures	The required information is given in Paragraph 7.3. of the EIA Report
46.	Impact on underground/ground waters and mitigation measures	The required information is given in Paragraph 7.4. of the EIA Report
47.	Impact on surface waters in the construction and operation phases, risks of surface water pollutio	The required information is given in Paragraph 7.4. of the EIA Report
48.	Impact on biological environment and impact assessment in the construction and operation phases	The required information is given in clause 7.6. of the EIA Report
49.	Impact on the integrity of the vegetation cover and habitats; impact on fauna, including fish fauna (including Red-Listed species) and results of relevant studies. Relevant mitigation measures and compensation measures if necessary	Para 7.6.1.-of the EIA Report describes the impact on habitat integrity; the impact on the vegetation cover is described in Para 7.6.2; as for the impact on fauna, including fish fauna, it is described in Para 7.6.3. Relevant mitigation measures are given under each paragraph. Besides, the expected impact and mitigation measures are given for each species.
50.	In case of impact on the plants in the project area, the information about them, trees and vegetation to cut down and their species and numbers, detailed study of their properties, impact on species protected by the legislation of Georgia ad international covenants, as well as prevention and compensation measures for such impacts, including habitat restoration measures as necessary	Timber resources registration sheet is given in Annex 4. See also paragraph 5.3.2. The question of impact on timber plants is considered in Paragraph 7.6.2. Sensitivity and value of the habitats and vegetation cover in the project corridor is so low that need no conservation measures. Only relevant mitigation measures are given.

51.	Based on the results of the above-listed studies, the Monitoring Plan must show the impacts on individual components of biodiversity	Paragraph 9 of the EIA Report gives the Environmental Monitoring Plan giving the issues of observation over the components of biodiversity.
52.	Waste management issues, including Waste Management Plan and impact expected by waste origination	Annex 5 of the EIA Report gives the Waste Management Plan
53.	Impact and impact assessment on the social-economic environment, land ownership and use, limitation of natural resources, health- and safety-related risks and relevant mitigation measures	This issue is discussed in Paragraph of the EIA Report 7.9.
54.	Information about the historical-cultural and archeological monuments in the project area and issues of impact on them	The required information is given in Paragraph 7.10 of the EIA Report
55.	Summary of the impacts expected as a result of the project implementation	The necessary mitigation measures to realize during the project implementation are given in paragraph 8 (Environmental Management Plan) of the EIA Report
56.	Monitoring Plan to realize in the construction and operation phase	The required information is given in Para 9 of the EIA Report
57.	Detailed Emergency Response Plan	The required information is given in details in Annex 6 of the EIA Report
58.	Assessment of public awareness in the scoping phase and public opinions and remark	The given information is given in Annex 1 of the EIA Report
59.	Principal conclusions developed during the EIA process and principal measures to realize during the activity	The required information is given in clause 11 of the EIA Report
60.	General location plan of the project area (with relevant markings)	The general layout of the project road is given on Paragraph 4.1.3 of the EIA Report
61.	Main technical parameters of the project road as a single table	The required information is given in Table 4.2.1 of the EIA Report
62.	A single schematic map of the project area, depicted on aerial photograph (high resolution) should be presented in printed and electronic form (A3 format, Shape File WGS_1984_37N (38N) projection) showing all necessary infrastructural facilities, existing and project roads, construction camp, construction grounds, territory of the spoil ground (as necessary)	The given information is given on drawing 4.1.3 of the EIA Report and enclosed CD - ROM


63.	Detailed designs of the irrigation channels crossing the dry gullies	The given information is given on Paragraph 4.6 of the EIA Report
64.	The EIA Report must give the information about the protective zones of the operating and project road in details	-


13.2 Annex 2. Engineering-geological sections

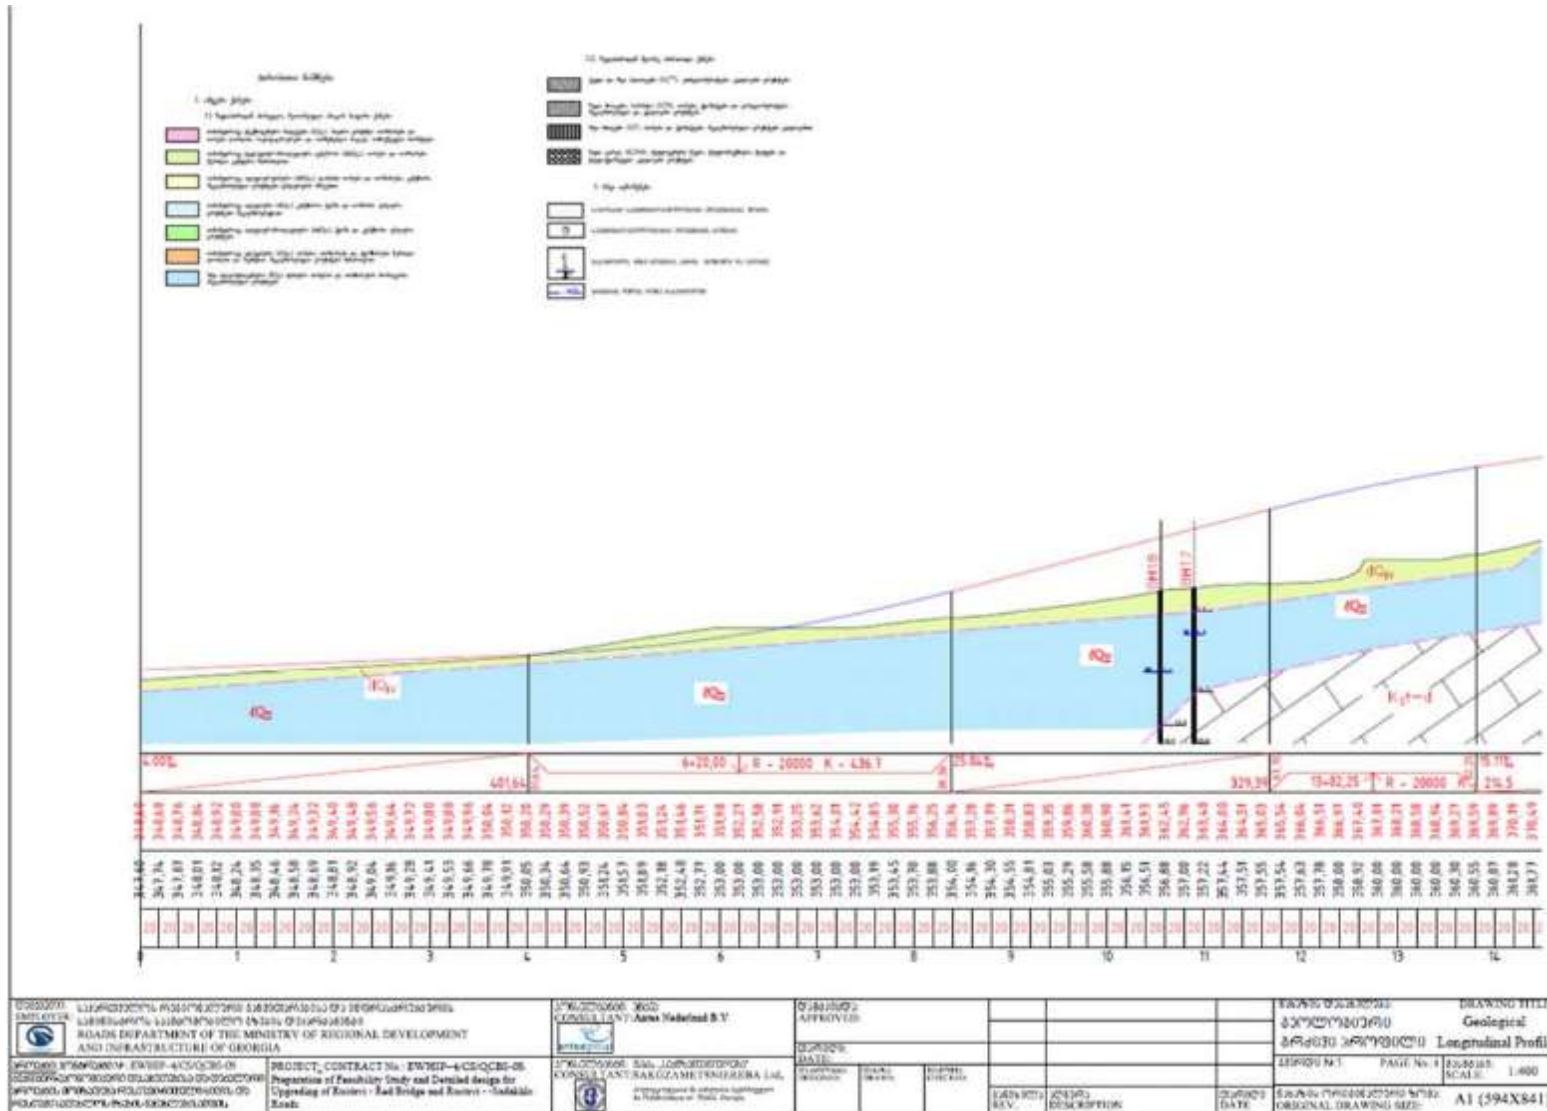


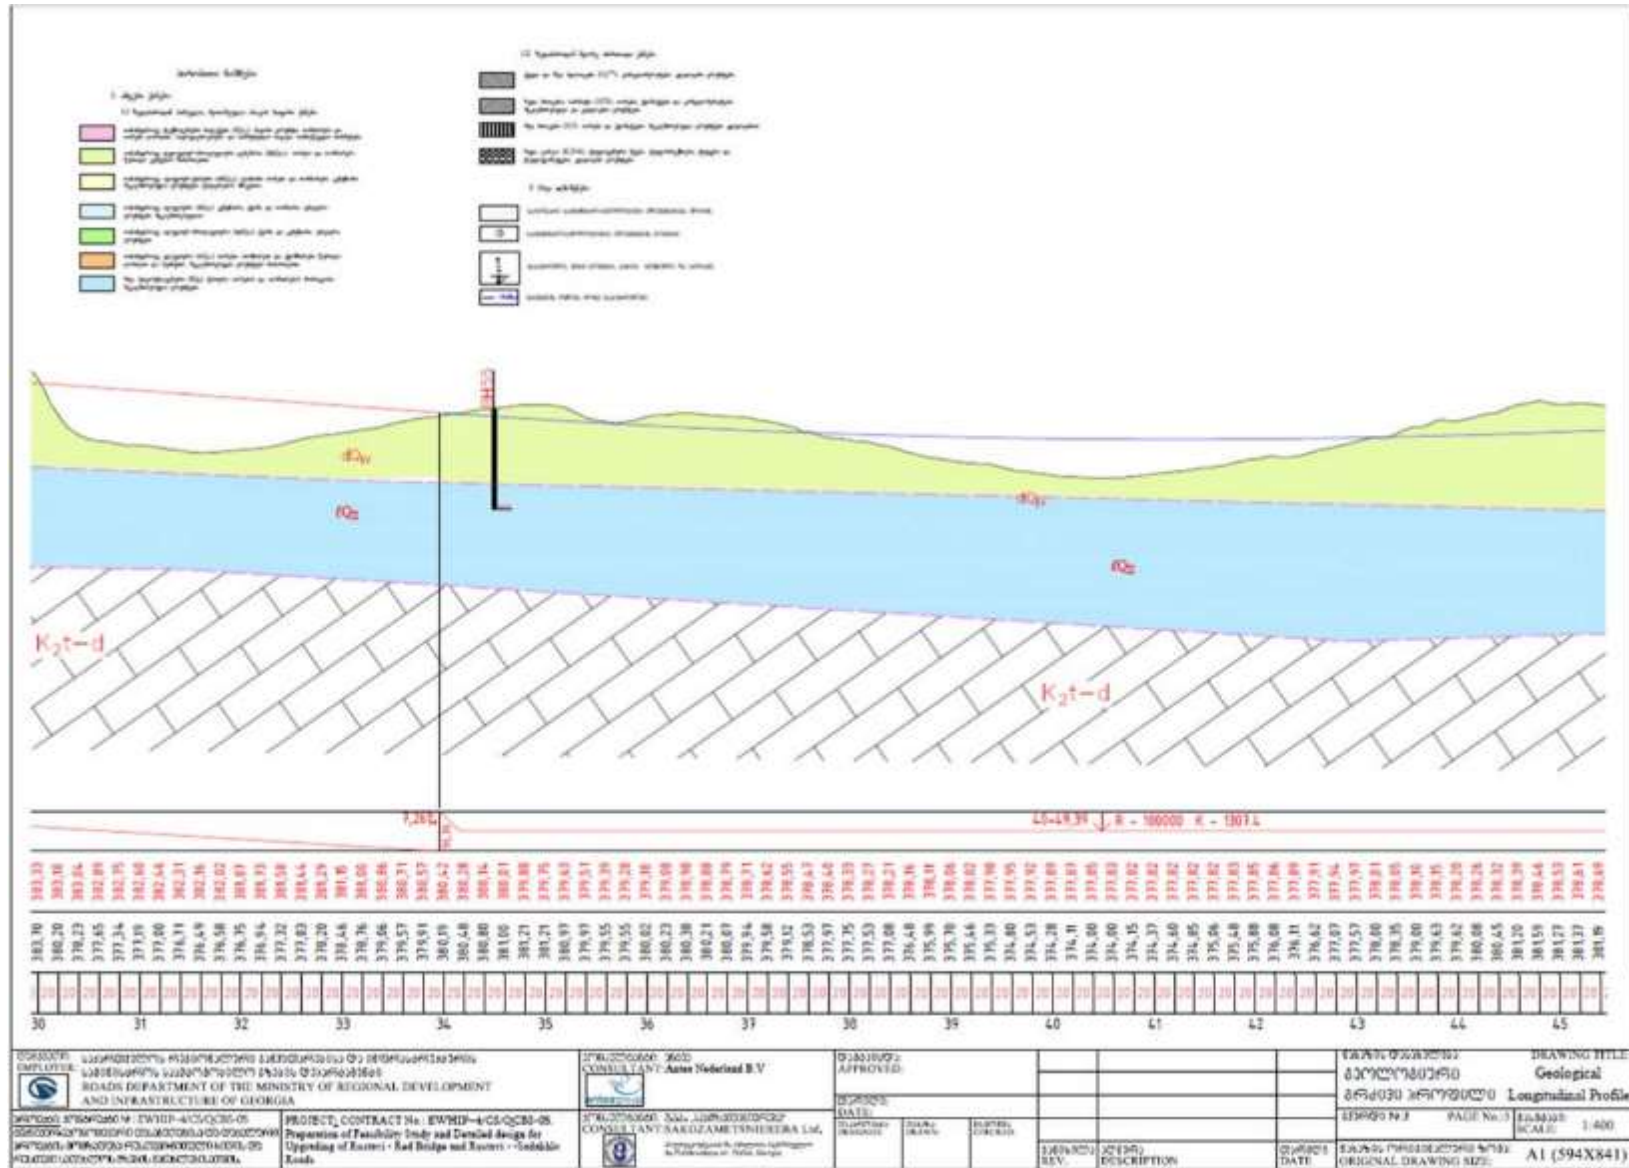


<p>საშენობის სამსახური საშენობის სამსახური ROADS DEPARTMENT OF THE MINISTRY OF REGIONAL DEVELOPMENT AND INFRASTRUCTURE OF GEORGIA</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>
					<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>	<p>საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" საპროექტო-კონსტრუქციული კომპანია "საქსტრუქტურა" CONSTRUCTION CONSULTANT SAKSSTRUKTURA LTD.</p>

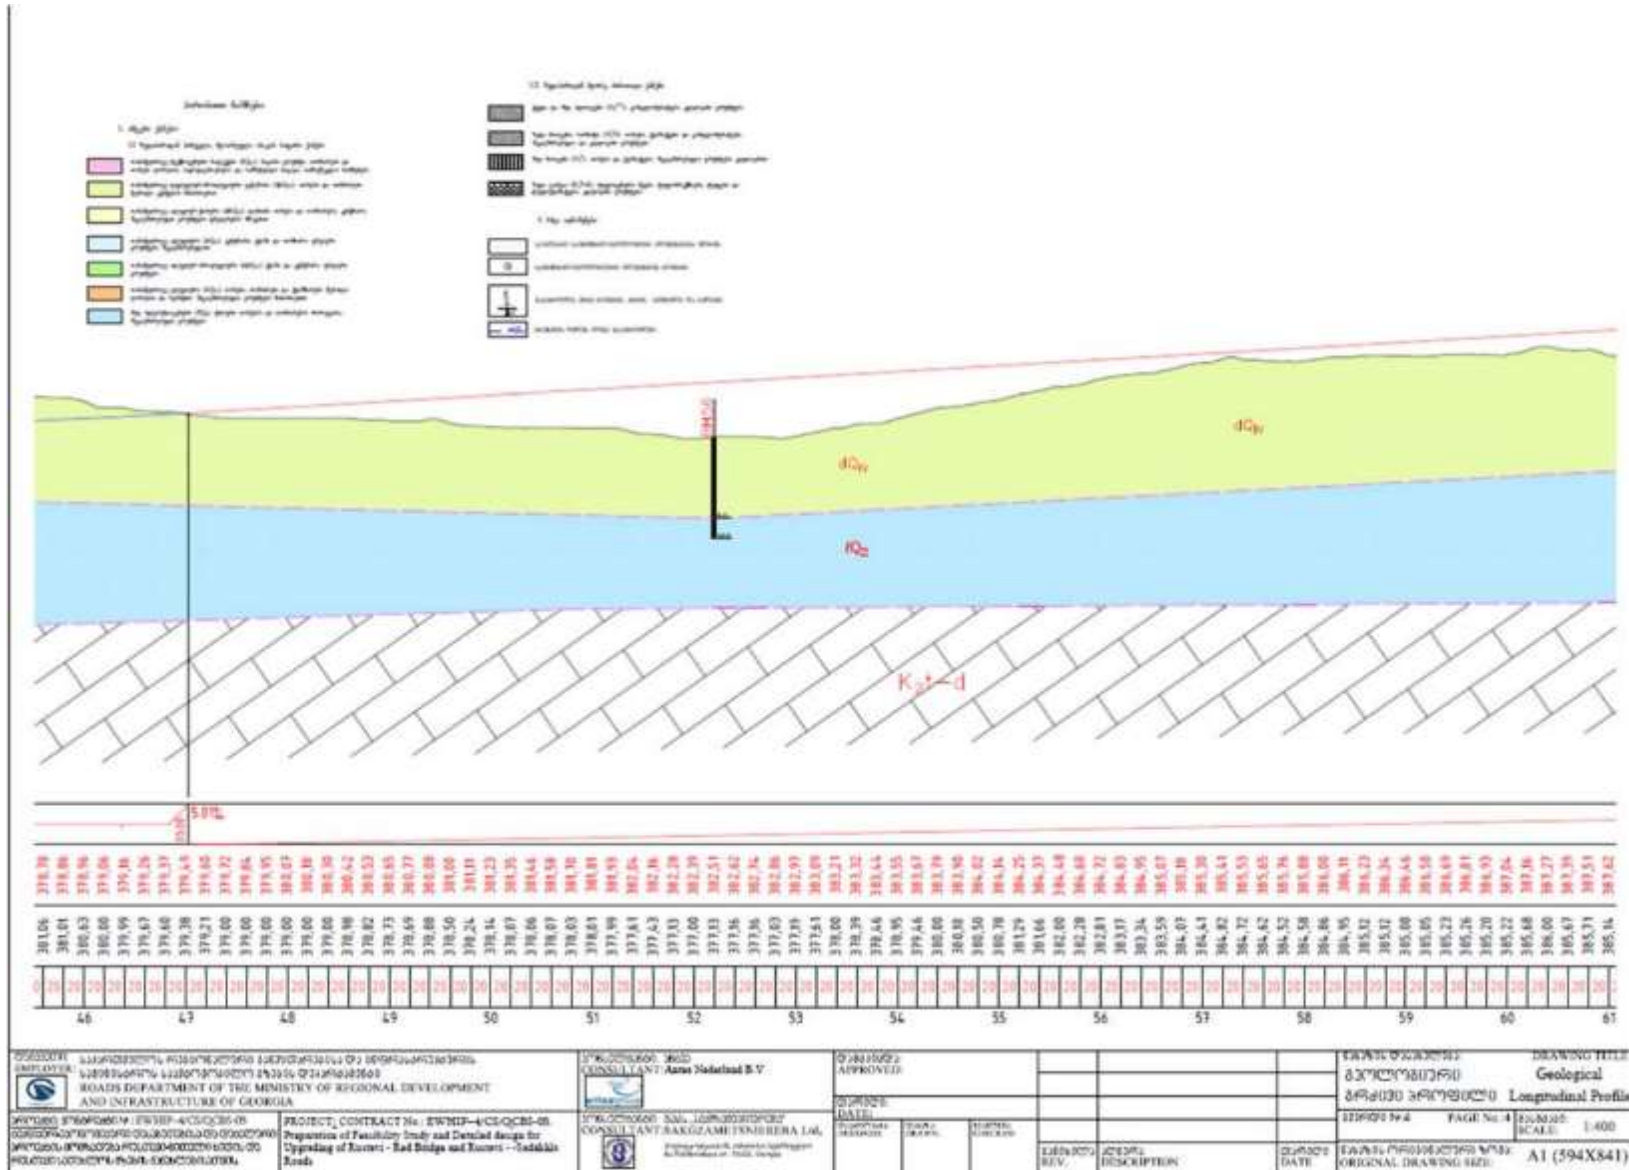


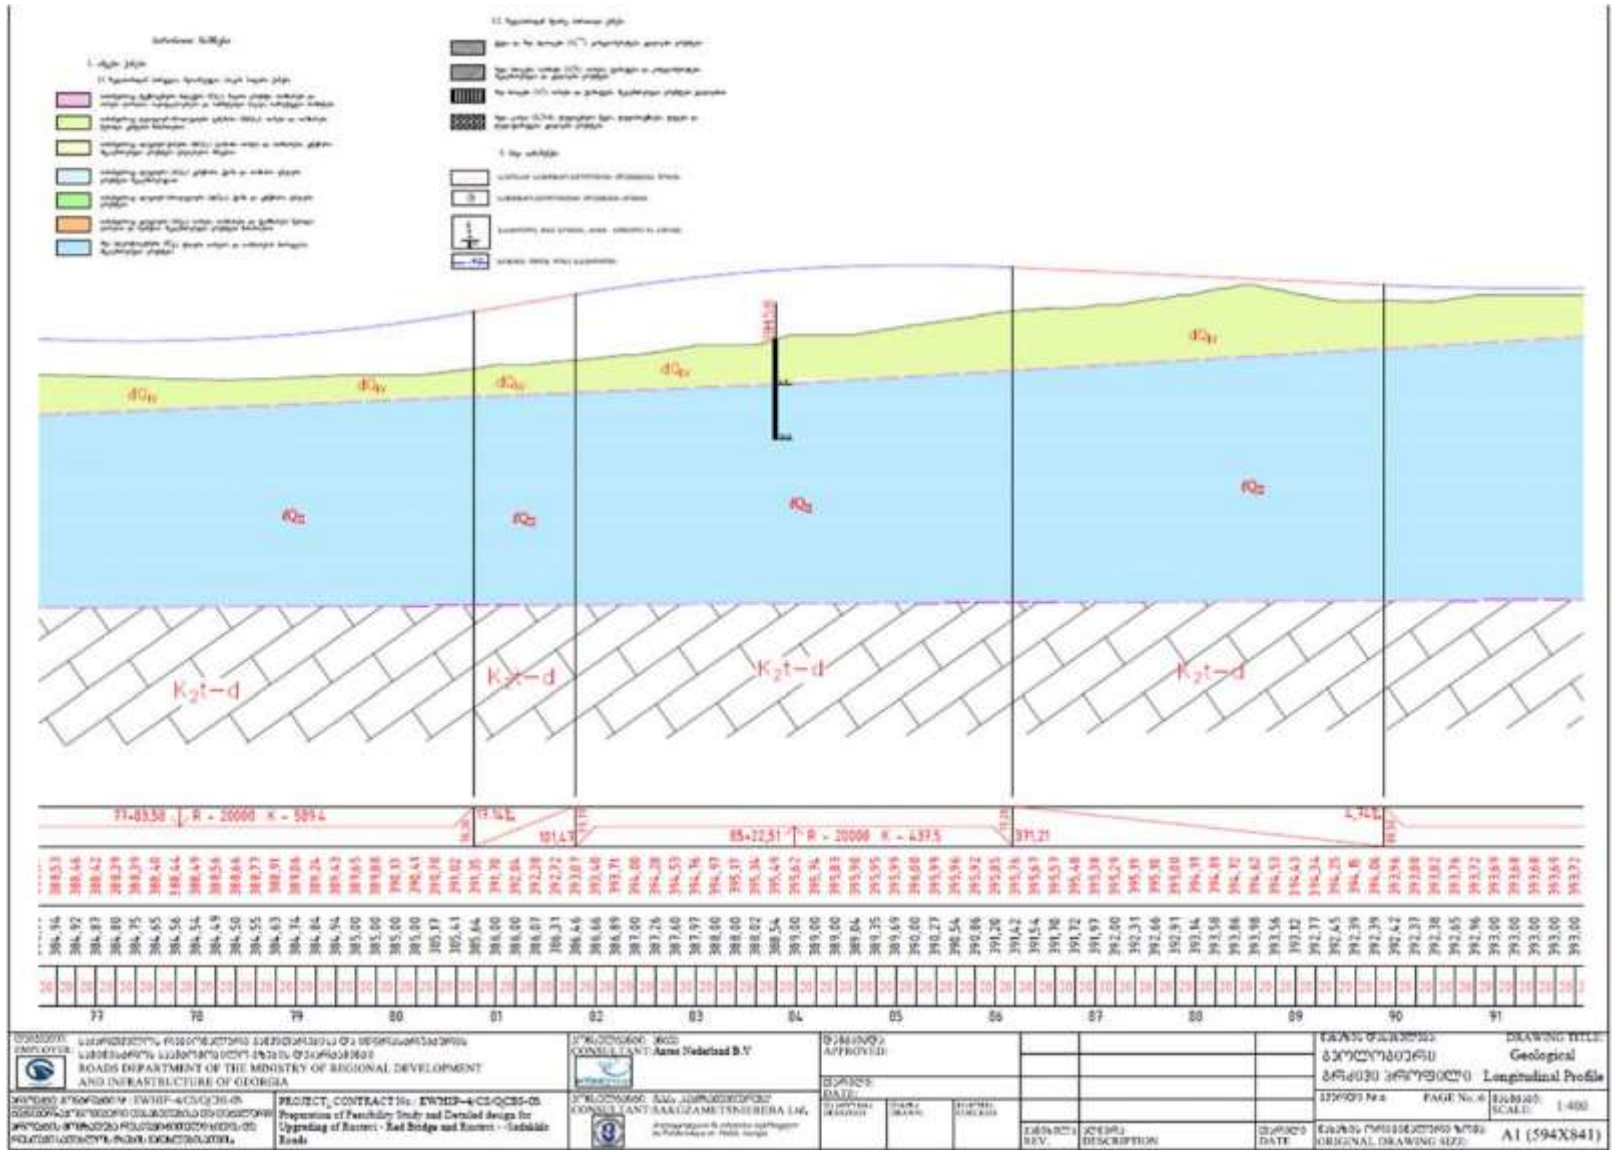


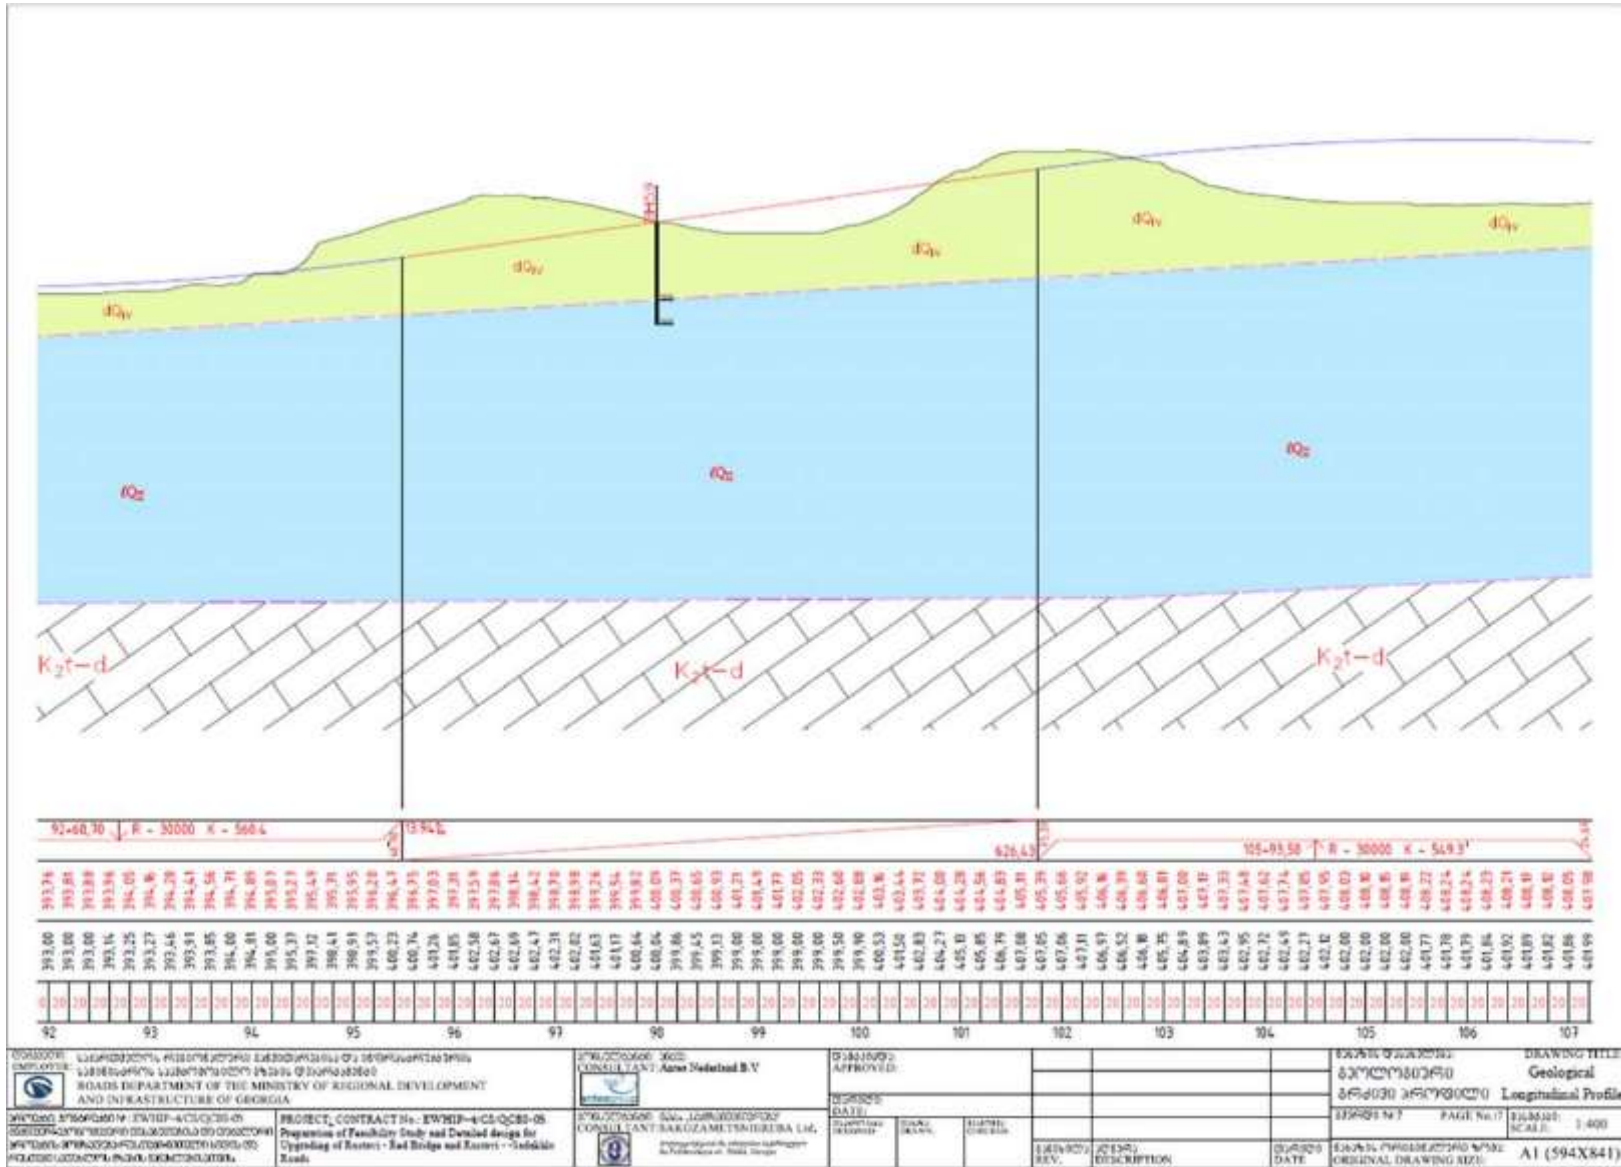


PROJECT, CONTRACT No.: EW201P-4-CG-CB-05 Preparation of Feasibility Study and Detailed design for Upgrading of Routes - Road Bridges and Routes - Subside Roads.		CONSULTANT: Amn Selected B.V. CONSULTANT: BAKAZAMETSHERBA L.A. შპს "ბაკაჯამეტშერბა" საქართველოს რეგიონული განვითარების და ინფრასტრუქტურის სამსახური		DRAWING APPROVED: DATE: DESIGNED BY: CHECKED BY: ENGINEER:		DRAWING TITLE: Geological Longitudinal Profile SHEET No. 7 PAGE No. 7 SCALE: 1:400 ORIGINAL DRAWING SIZE: A1 (594X841)	
(REV) NO. 1 REV. DATE	(DESCR) DESCRIPTION	(DATE) DATE	(SCALE) SCALE	(SHEET) SHEET NO.	(PAGE) PAGE NO.	(TITLE) TITLE	(SIZE) SIZE

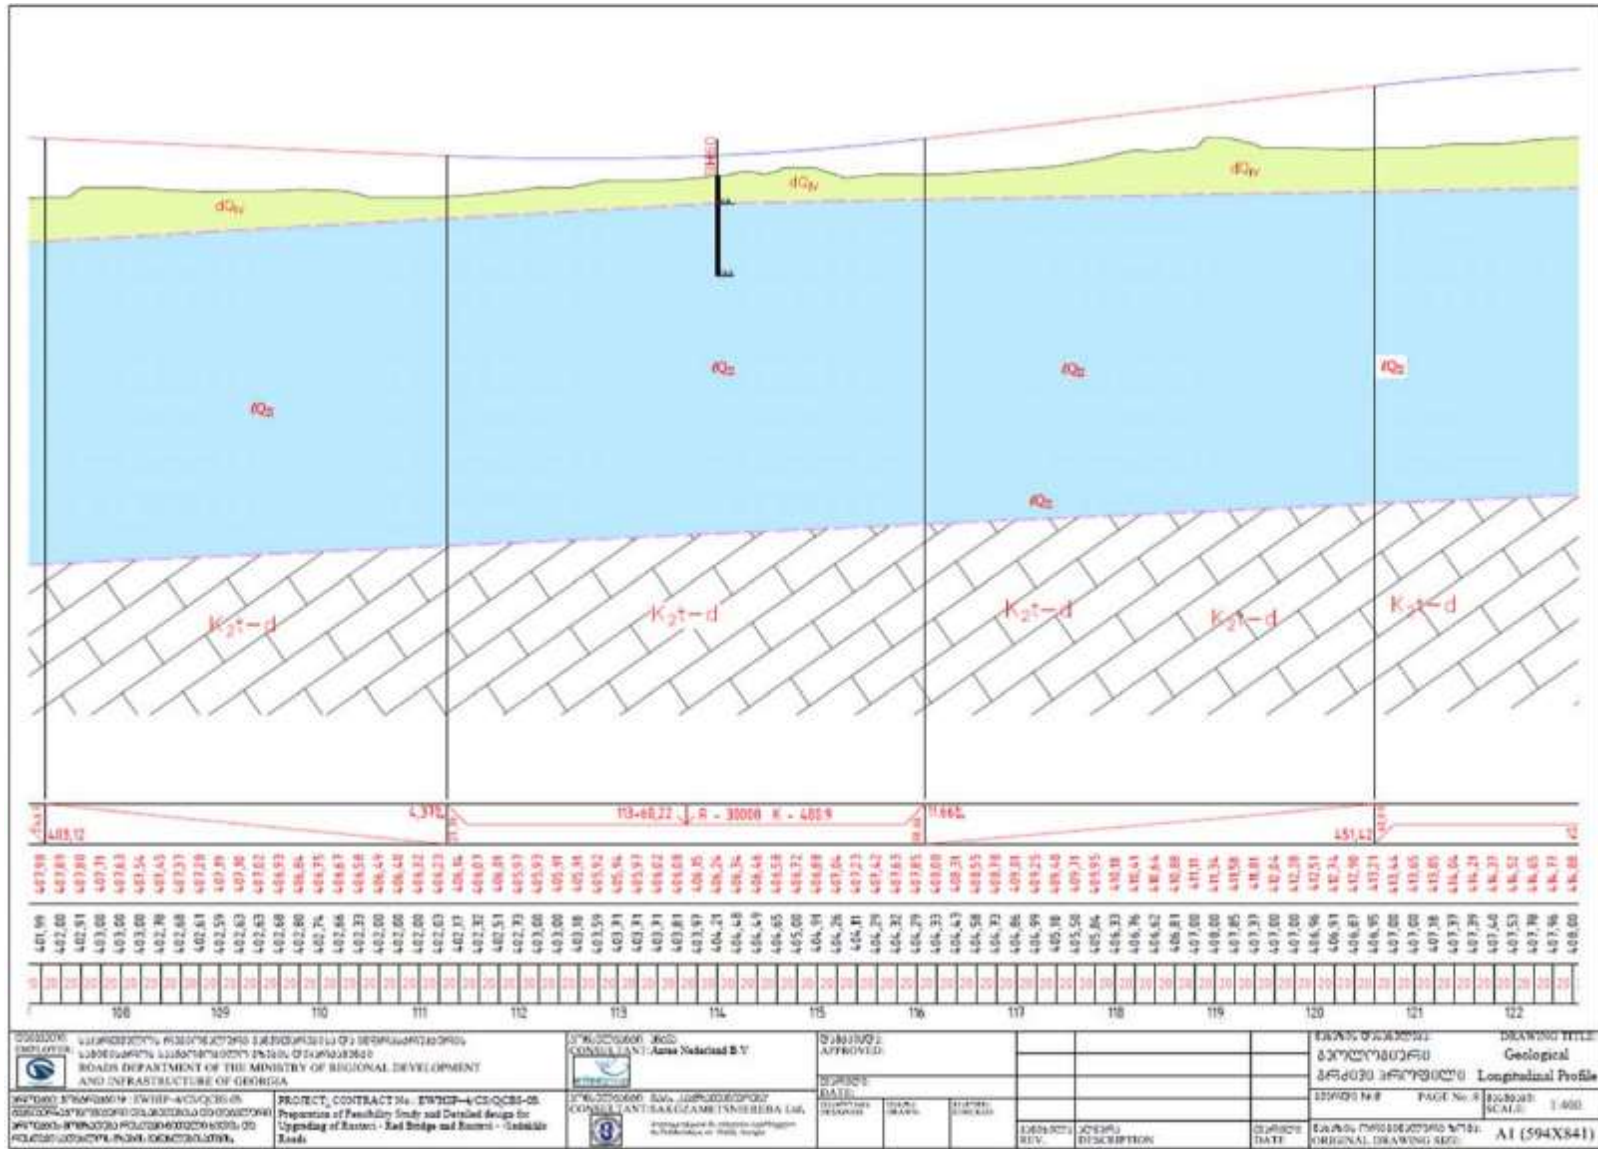

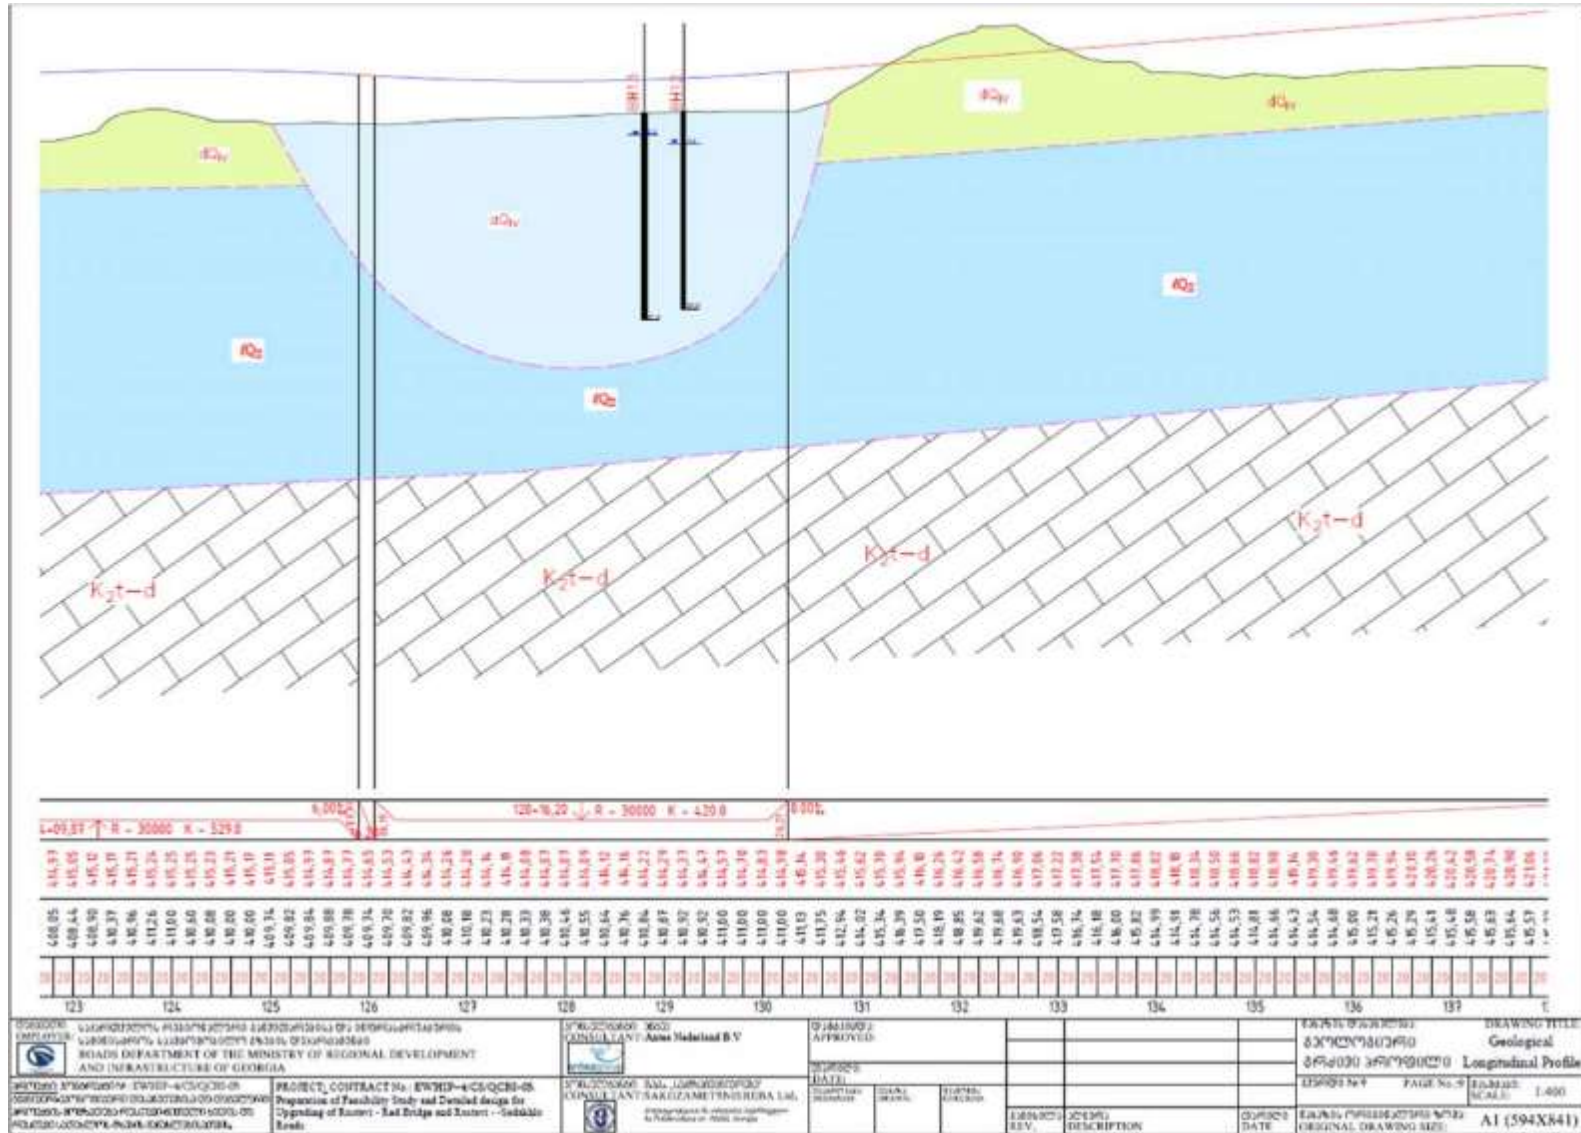


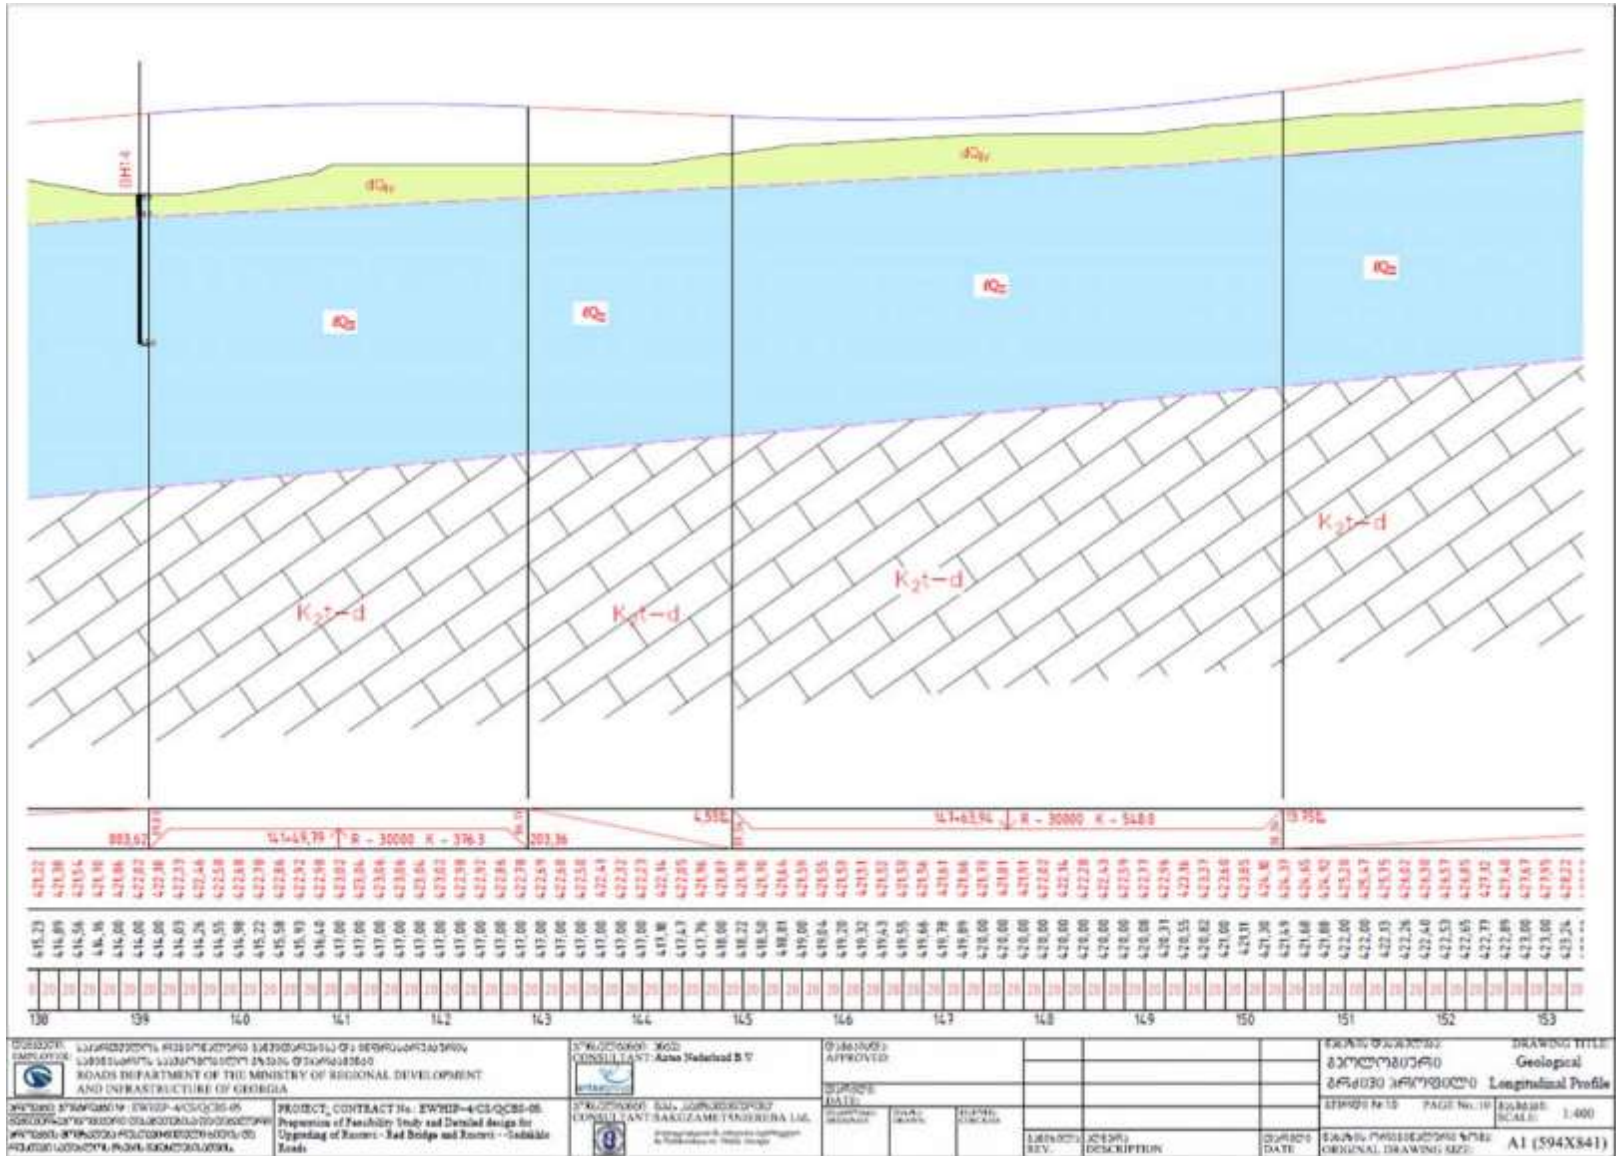


<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>
				<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>
<p>PROJECT, CONTRACT No. EWRIP-4-CR-QC86-08 Preparation of Feasibility Study and Detailed Design for Upgrading of Routes - 3rd Bridge and Routes - 2nd Bridge</p>				<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>		<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	
<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>				<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>		<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	
<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>				<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>		<p>საგზაო სამსახური საგზაო სამსახური საგზაო სამსახური</p>	

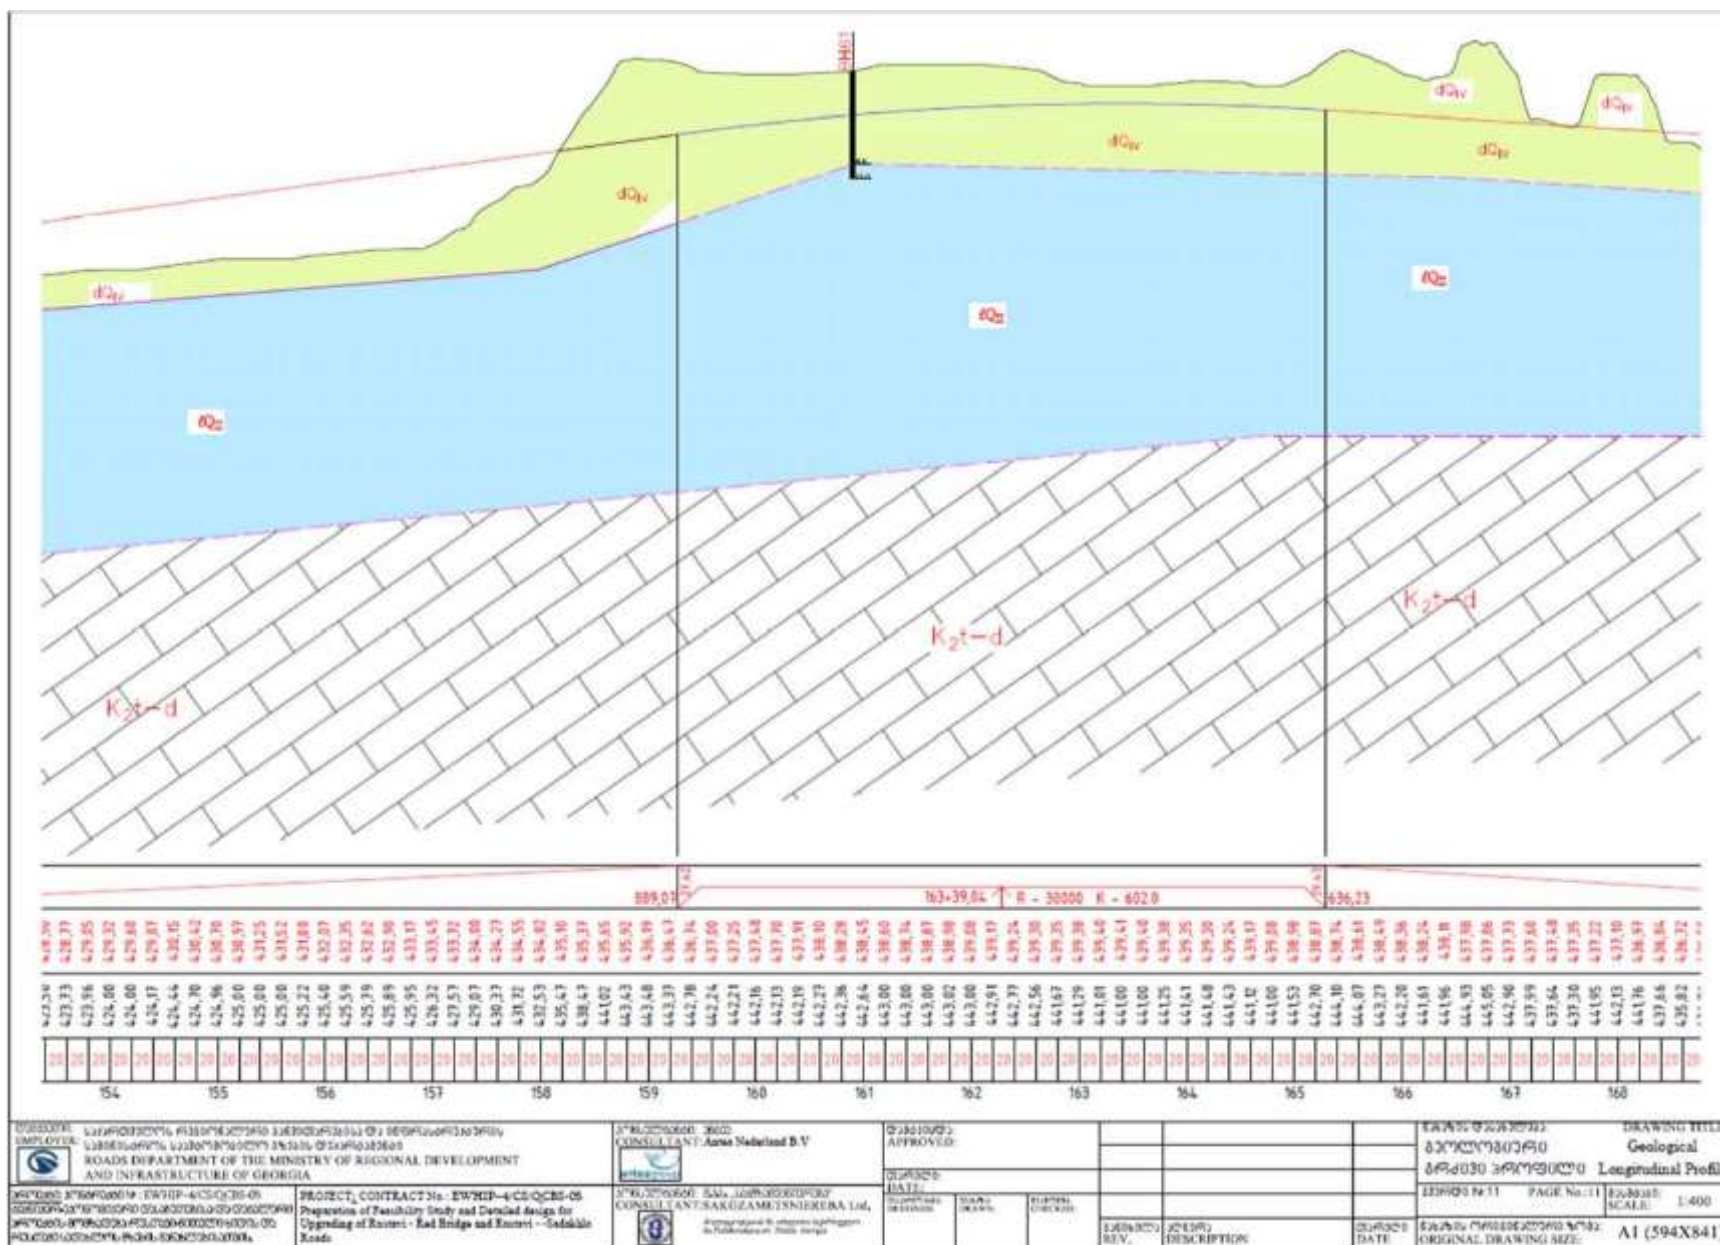


<p>EMPLOYER: ROADS DEPARTMENT OF THE MINISTRY OF REGIONAL DEVELOPMENT AND INFRASTRUCTURE OF GEORGIA</p>	<p>PROJECT CONTRACT No - EWHP-4CS-QCB-05 Preparation of Feasibility Study and Technical design for Designing of Routes - Rad Bridge and Routes - Gravel Roads</p>	<p>CONSULTANT: SAKGZAMTSNEREBA Ltd. Preparation of Feasibility Study and Technical design for Designing of Routes - Rad Bridge and Routes - Gravel Roads</p>	<p>DATE:</p>	<p>SCALE:</p>	<p>PROJECT TITLE: Geological Longitudinal Profile</p>
			<p>DATE:</p>	<p>SCALE:</p>	<p>PAGE No. 11 ORIGINAL DRAWING SIZE: A1 (594X841)</p>

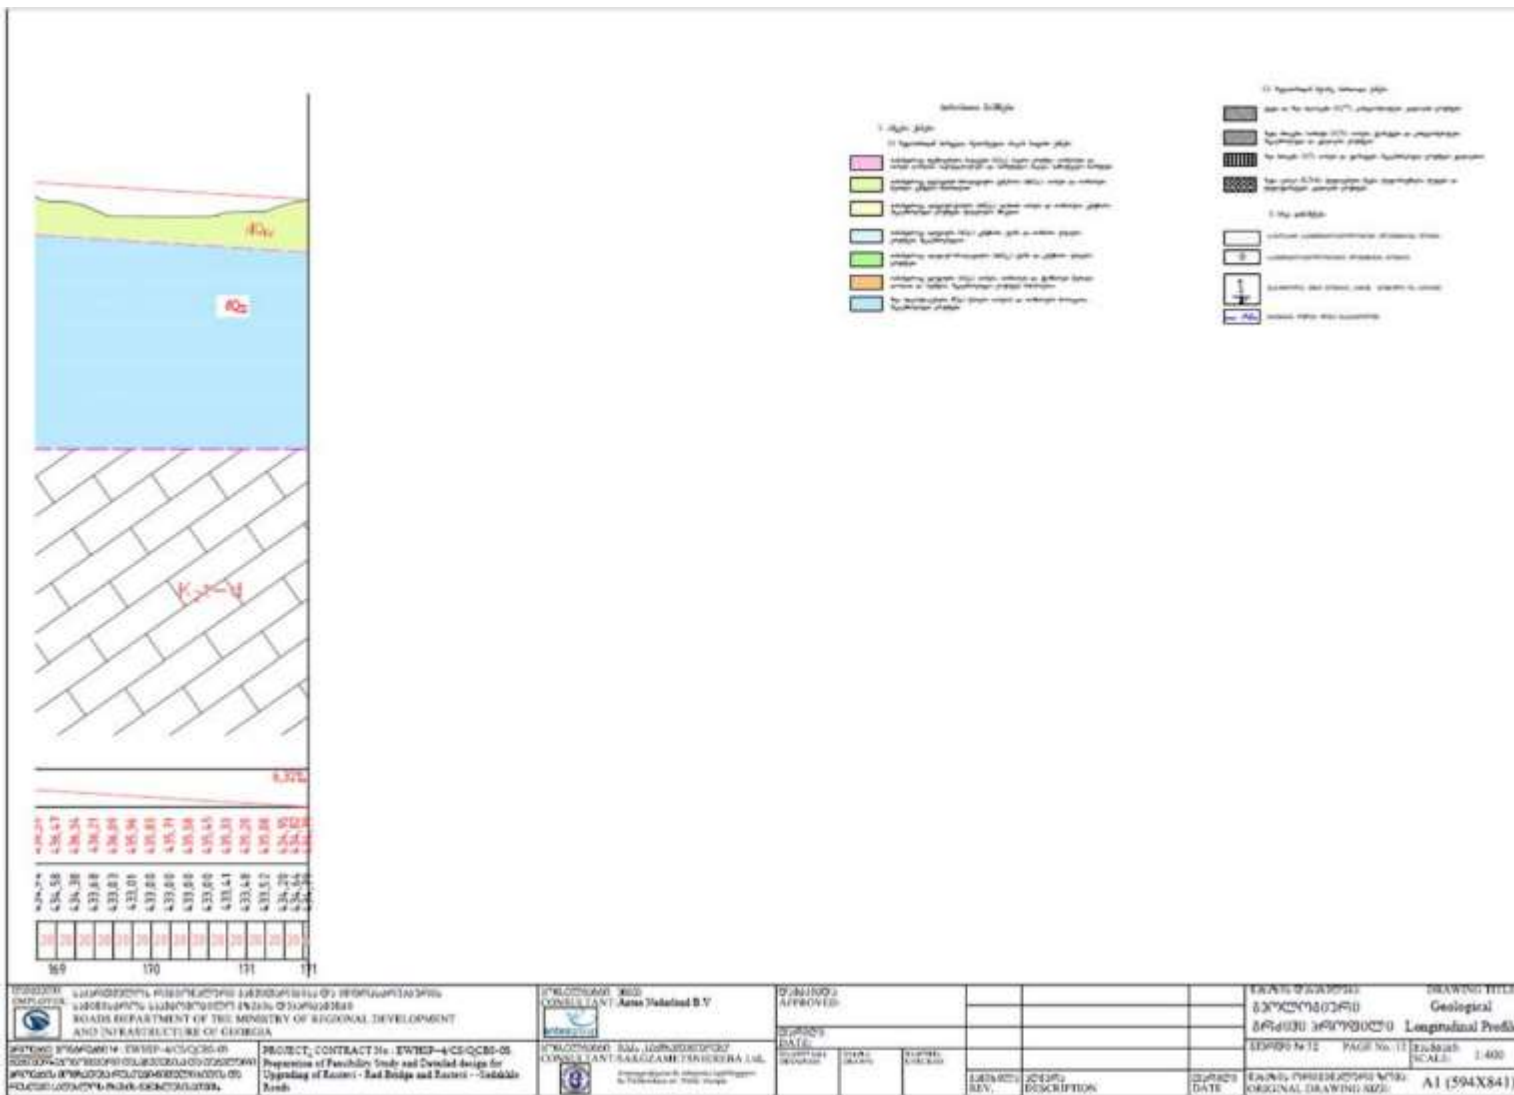


13.3 Annex 3. Comparative values of expected impact along the different sections of the design corridor

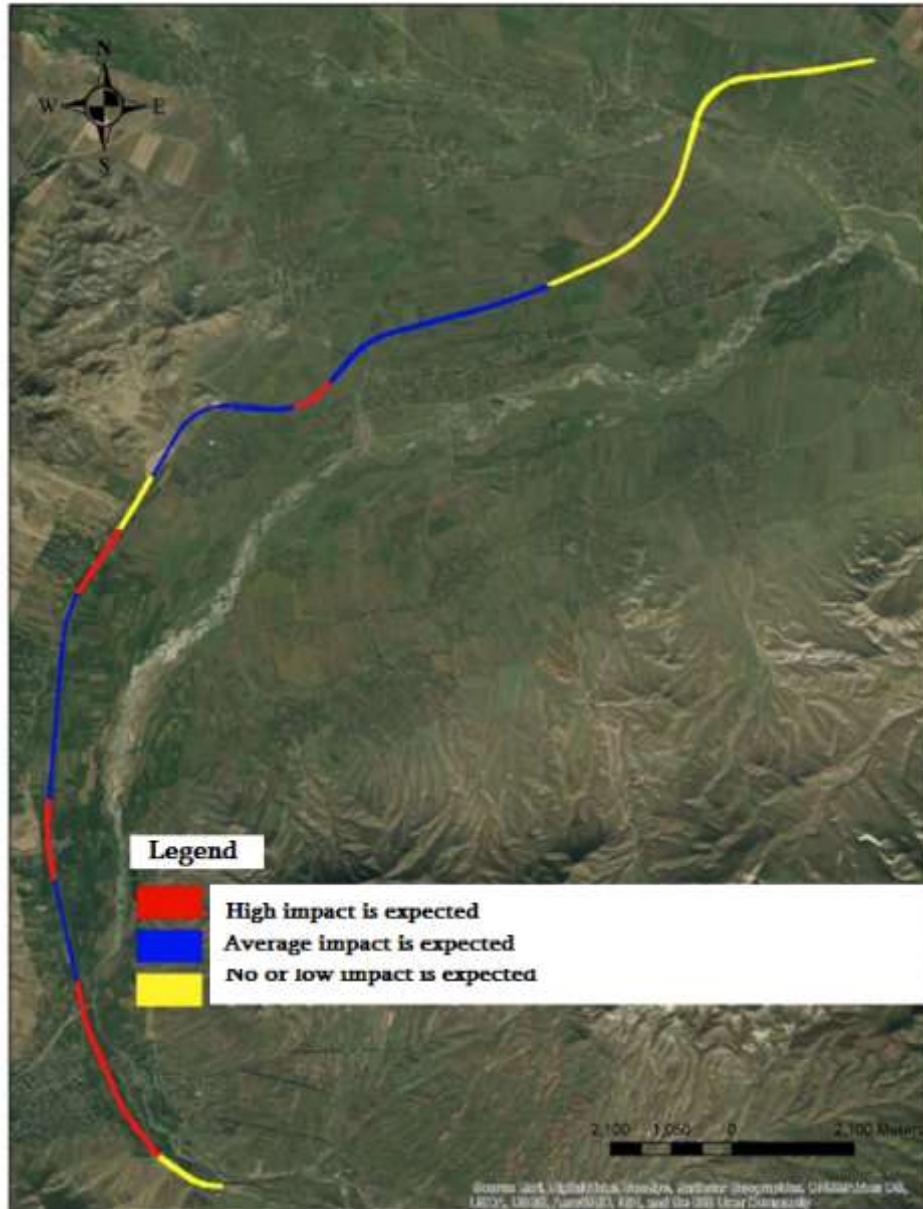


The value of impact on the geological environment along different sections of the
Design corridor

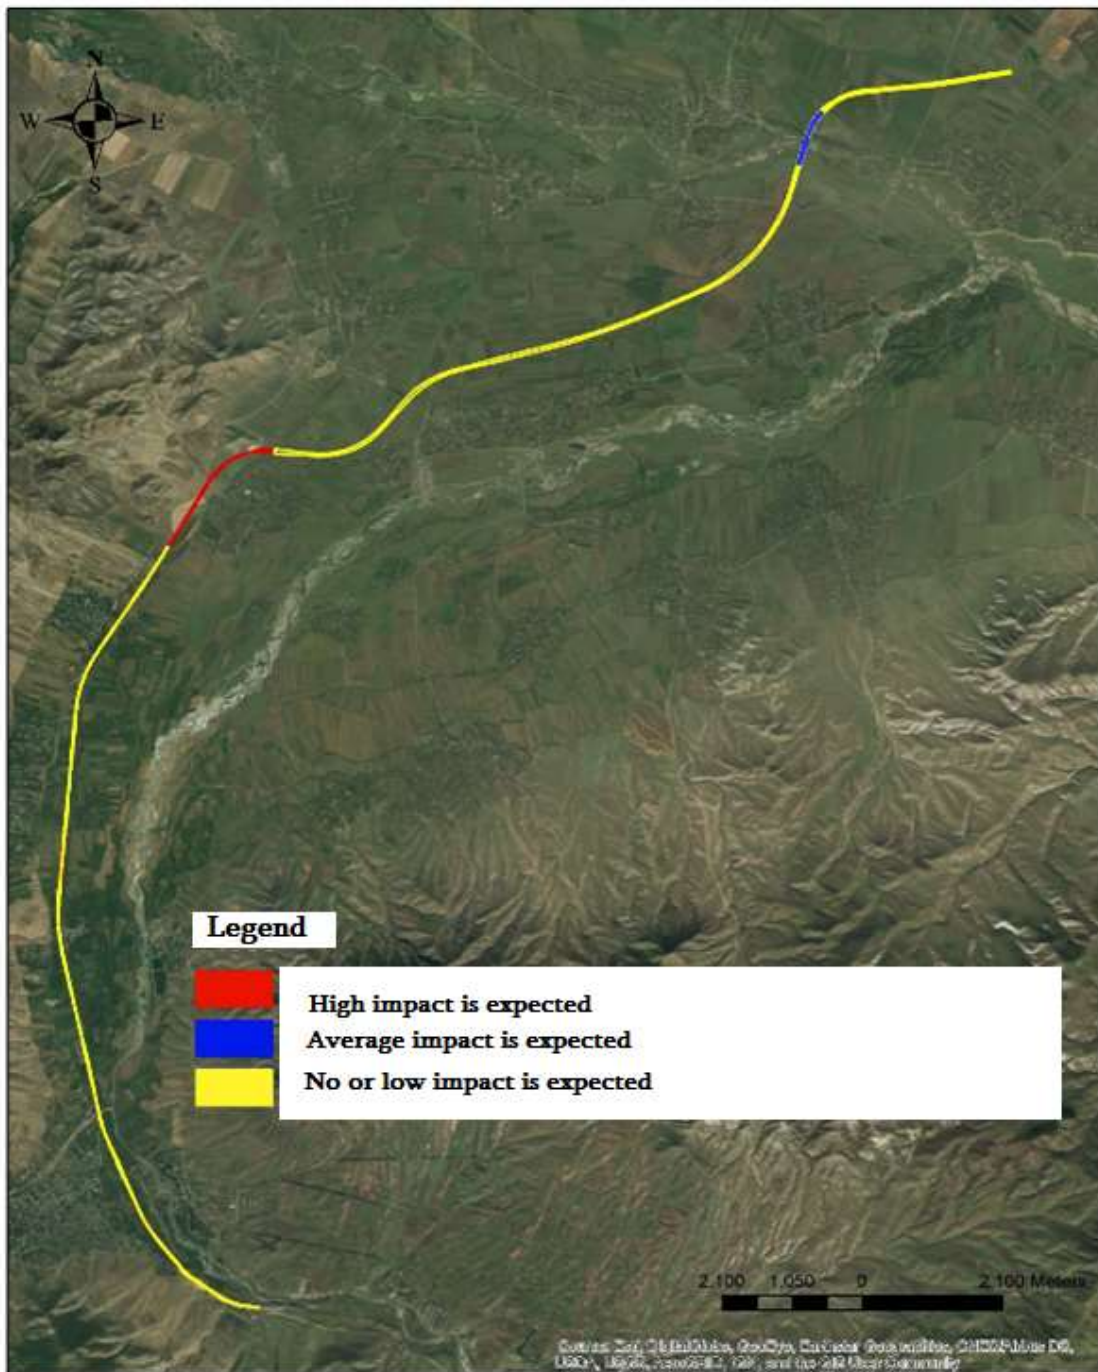


Relative value of the impact on surface water quality along different sections of the design corridor

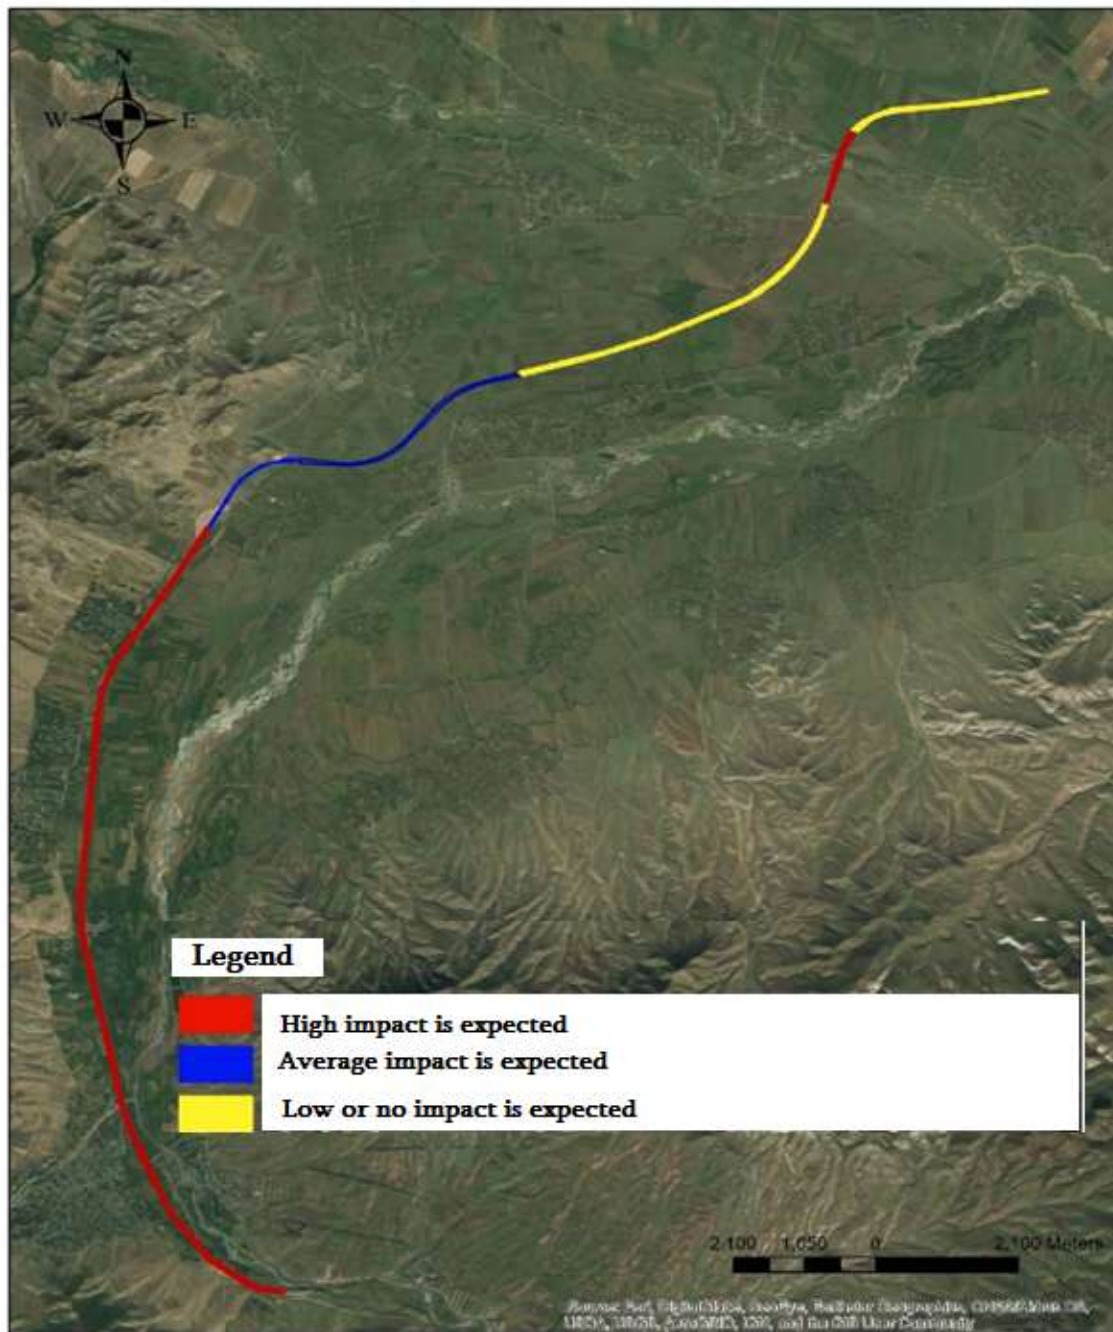


Relative value of impact on soil along the different sections of the design corridor

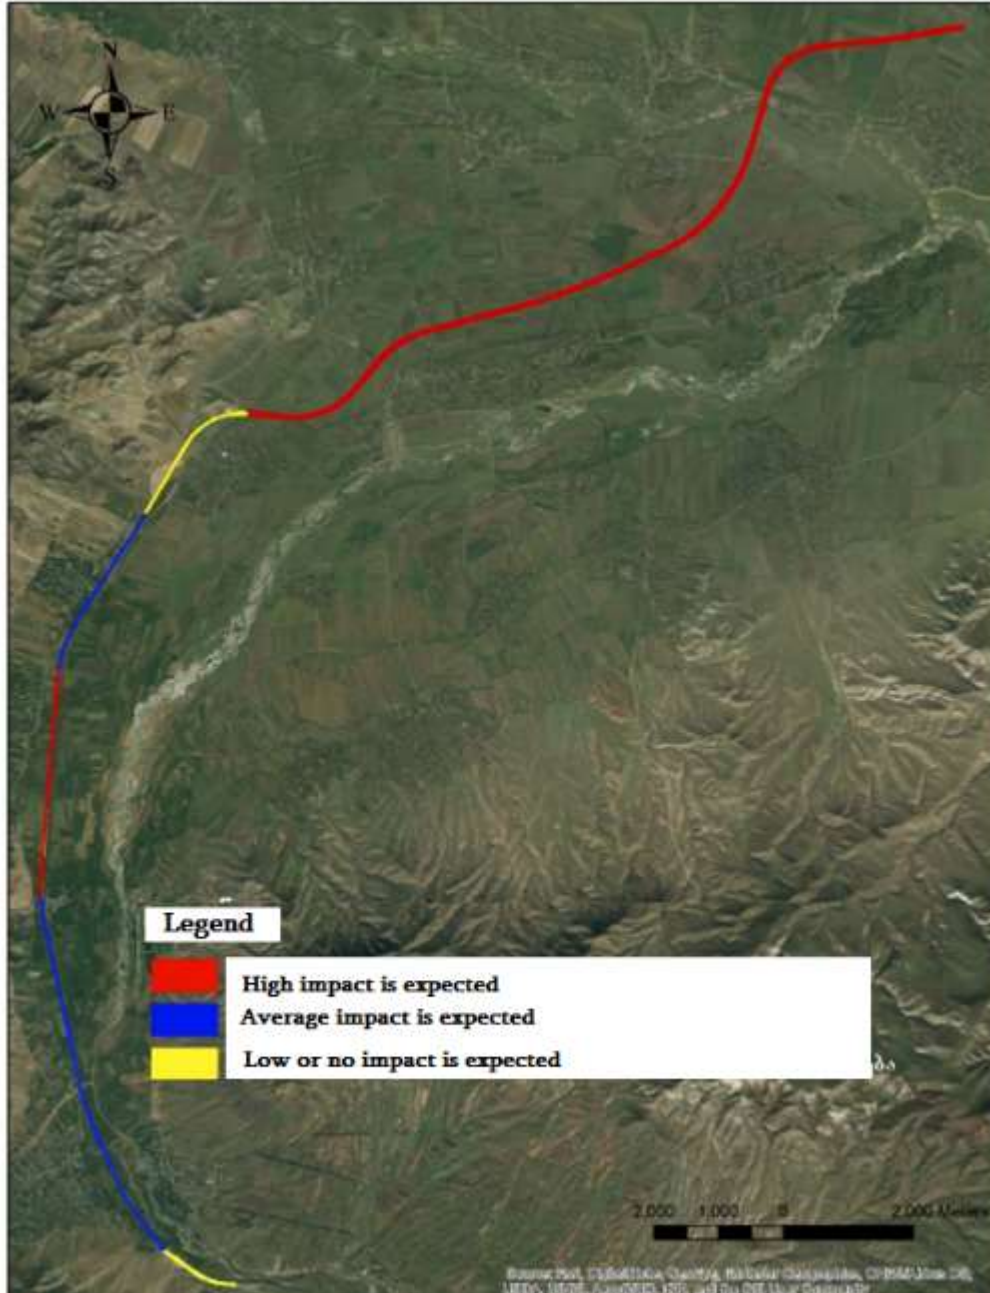

Relative value of the impact on biodiversity along the different sections of the design corridor

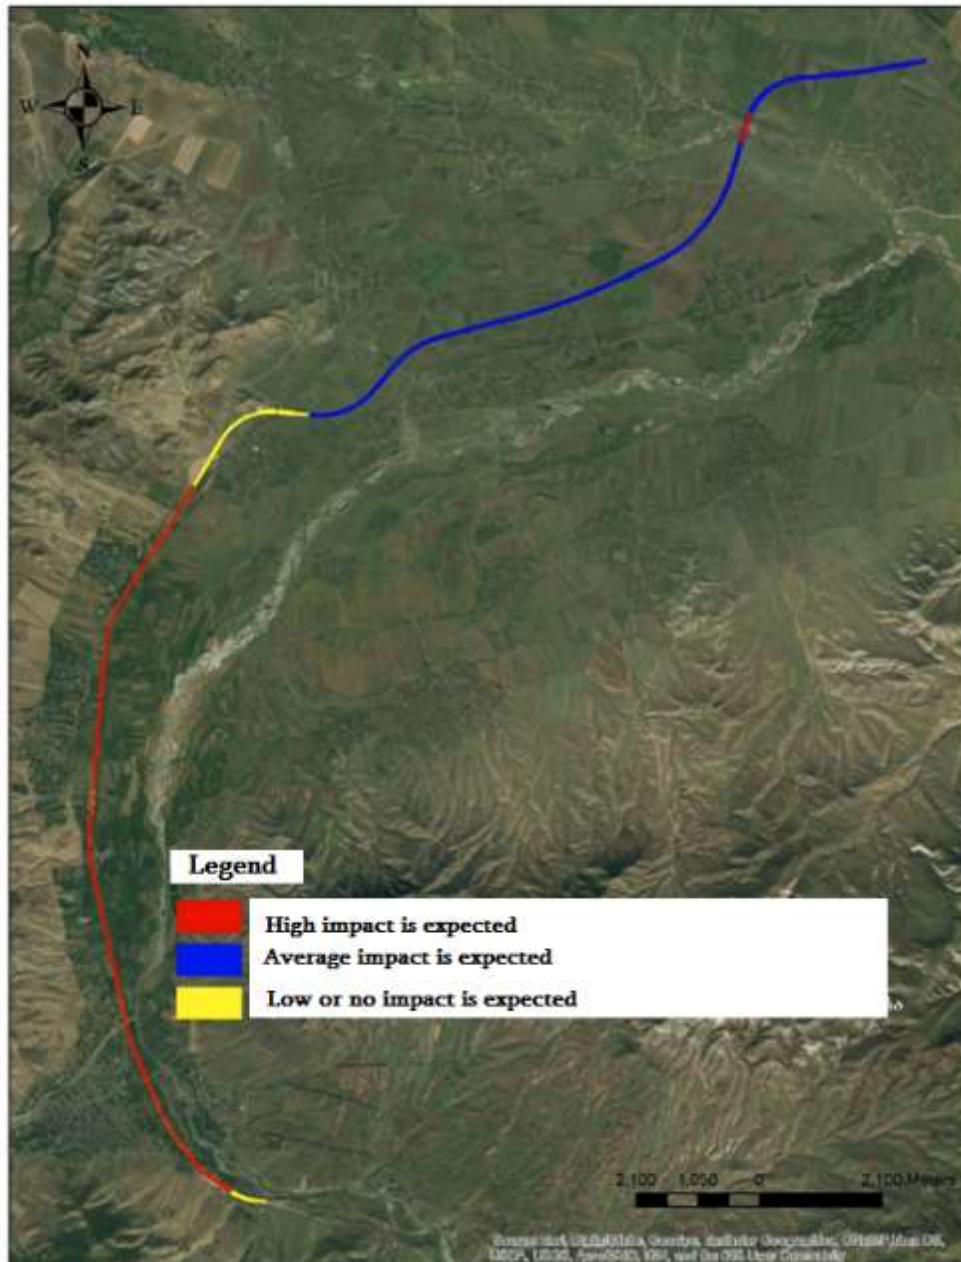

Relative value of social impacts along the different sections of the design corridor

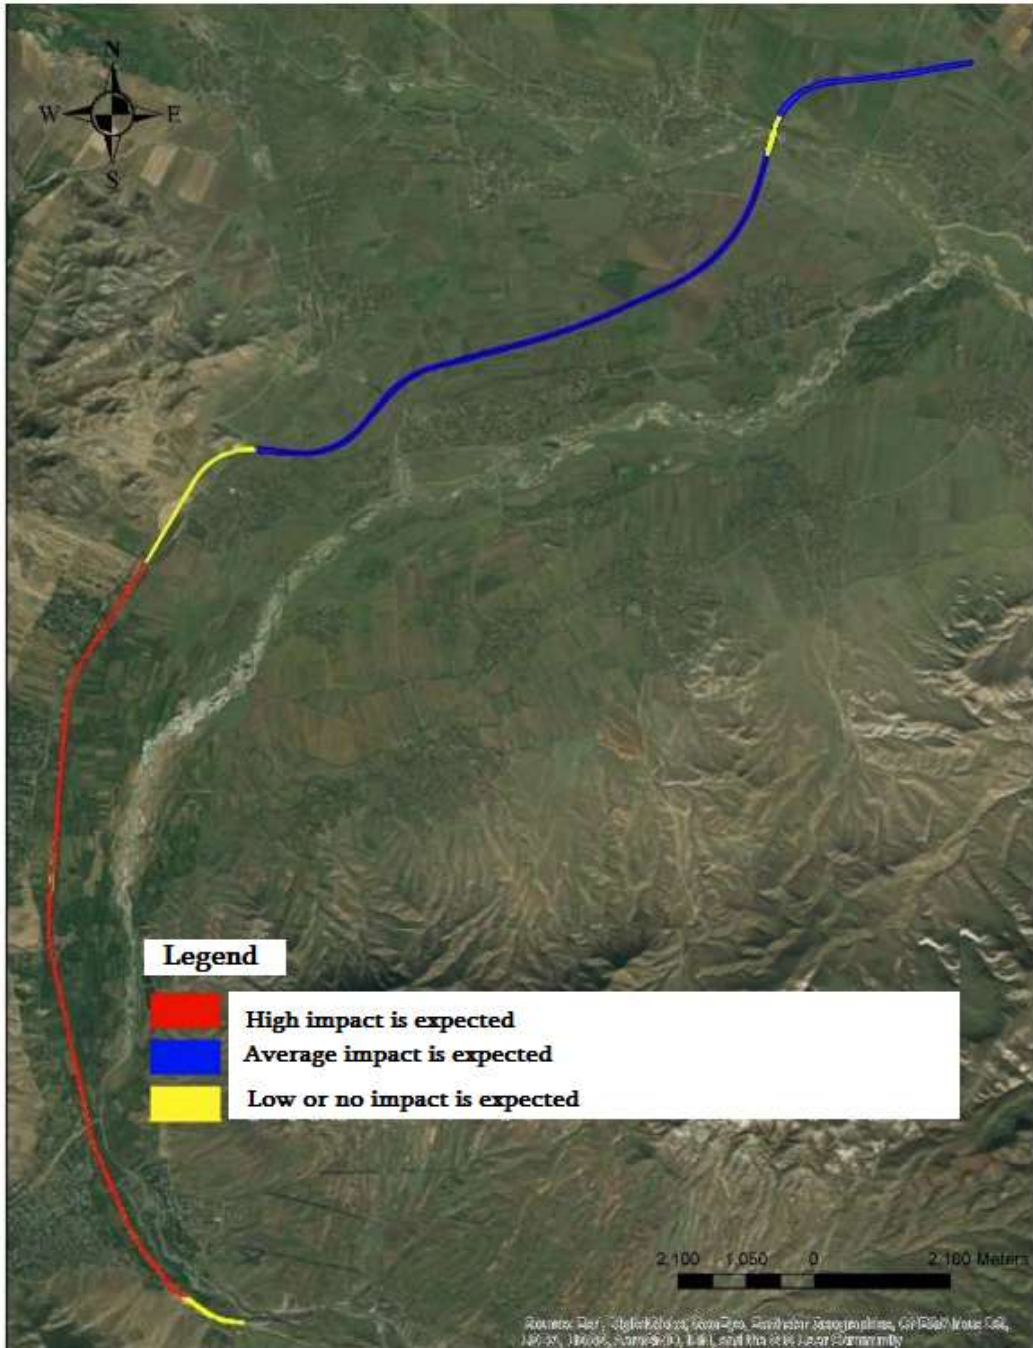

13.4 Annex 4. Software print of calculation of emissions of harmful substances into the atmospheric air in the construction phase

УПРЗА ЭКОЛОГ, версия 3.1
Copyright © 1990-2010 ФИРМА "ИНТЕГРАЛ"

Enterprise #12609 Construction camp

Option of the initial data: 1, new option of the initial data

Calculation option: New calculation

option Calculation provided: for

summer

Calculation module: "ОНД-86"

Calculation constants: E1= 0.01, E2=0.01, E3=0.01, S=999999.99 sq.km

Meteorological parameters

Average temperature of the hottest month	31.9° C
Average temperature of the coldest month	0.3° C
Coefficient dependant on the atmospheric air stratification temperature	200
Maximum wind velocity for specific location (reoccurrence of excession within 5% limits)	12,5 m/sec

Structure of the enterprise (grounds, shop)

Number	Description of the ground (shop)
--------	----------------------------------

Parameters of Emission Sources

Registration:

Considered issues:

“%” – The source is considered excluding the background;

“+” - The source is considered without excluding the background;

“-“The source is not considered and its contribution is not included in the background.

In case of absence of marking, no emission source is considered.

Types of sources:

1 – Point;

2 – Linear;

3 – Unorganized;

4 – A set of point sources combined as a single plane source for calculation purposes;

5 – Unorganized, with emissions variable in time;

6 – Point, with umbrella-like or horizontal emission;

7 – A set of point sources with umbrella-like or horizontal emission;

8 – Motorway.

Registration during calculation	Ground #	Shop .#	Source #	Source	Option	Type	Source height (m)	Diameter (m)	Gas-air mixture volume (m3)	Gas-air mixture velocity (m/sec)	Gas-air mixture temperat. (°C)	Relief coefficient	Coordinate axis (m) X1	Coordinate Axis (m) Y1	Coordinate axis (m) X2	Coordinate axis (m) Y2	Source Width (m))
%	0	0	1	Cement silo 1								1,0	0,0	0,0	0,0	0,0	0,00
Subst. code				Substance	Emission (gr/sec)	Emission (t/year)	F	summe	Cm/MA	Xm	Um	wint.:	Cm/MA	Xm	Um		
2908				Inorganic dust: 70-20% SiO2	0.0140000	0,0000000	1	r.:	C	57	0,5		C	28,3	0,5		
									0,039				0,141				
Subst. code				Substance	Emission (gr/sec)	Emission (t/year)	F	summe	Cm/MA	Xm	Um	wint.:	Cm/MA	Xm	Um		
0301				Nitrogen dioxide (Nitrogen (IV) oxide)	0.0220090	0,0000000	1	r.:	C	28,5	0,5		C	28,5	0,5		
%	0304	0	0	Nitrogen (III) oxide (Nitrogen oxide)	0.0035760	0,0000000	1	0,0055	0,11205	0,038	28,5	0,5	-290,0	-188,0	290,0	-188,0	0,00
	0328				Carbon (Soot)	0.0024220	0,0000000	1		0,068	28,5	0,5	0,068	28,5	0,5		
	0330				Sulphur dioxide	0.0032660	0,0000000	1		0,039	28,5	0,5	0,039	28,5	0,5		
	0337				Carbon oxide	0.0625330	0,0000000	1		0,053	28,5	0,5	0,053	28,5	0,5		
%	2732	0	0	სამრეწველო სადგურის ლექსი	0.0095920	0,0000000	1	0,00000	0,034	28,5	0,5	108,0	-180,0	138,0	0,5	211,0	5,00
%	0	0	5	ლენტული ტრანსპორტიორი	0.0000000	0,0000000	1	3	5,0	0,000	C	1,0	47,0	-56,0	4,0	-21,0	1,00
Subst. code				Substance	Emission (gr/sec)	Emission (t/year)	F	summe	Cm/MA	Xm	Um	wint.:	Cm/MA	Xm	Um		
0333				Hydrogen sulphide	0.0000549	0,0000000	1		0,095	17,1	0,5		0,425	7,7	0,5		
2754				Saturated hydrogens C12-C19	0.0195451	0,0000000	1		0,271	17,1	0,5		1,210	7,7	0,5		
Subst. code				Substance	Emission (gr/sec)	Emission (t/year)	F	summe	Cm/MA	Xm	Um	wint.:	Cm/MA	Xm	Um		
2908				Inorganic dust: 70-20% SiO2	0.1050000	0,0000000	3	r.:	C	4,421	14,3	0,5	4,421	14,3	0,5		
Subst. code				Substance	Emission (gr/sec)	Emission (t/year)	F	summe	Cm/MA	Xm	Um	wint.:	Cm/MA	Xm	Um		
2908				Inorganic dust: 70-20% SiO2	0.0032507	0,0000000	3	r.:	C	0,137	14,3	0,5	0,137	14,3	0,5		
%	0	0	6	Receiving and storing inert materials			1	3	5,0	0,00000		1,0	95,0	-370,0	197,0	-253,0	80,00
Subst. code				Substance	Emission (gr/sec)	Emission (t/year)	F	summe	Cm/MA	Xm	Um	wint.:	Cm/MA	Xm	Um		
2908				Inorganic dust: 70-20% SiO2	0.0316746	0,0000000	3	r.:	C	1,334	14,3	0,5	1,334	14,3	0,5		

%	0	0	7	Receiving and storing fractioned grit	1	3	5,0	0,00	0	0,00000	0	1,0	18,0	-151,0	165,0	-118,0	50,00
Subst. code				Substance			Emission (gr/sec)	Emission (t/year)	F	summe	Cm/MA	Xm	Um	wint.:	Cm/MA	Xm	Um
2908				Inorganic dust: 70-20% SiO2			0.0550048	0,000000	3	r.: C	2,316	14,3	0,5		2,316	14,3	0,5
%	0	0	5	Band conveyor	1	3	5,0	0,00	0	0,00000	0	1,0	47,0	-56,0	4,0	-21,0	1,00

Parameters of Emission Sources

Registration:

Considered issues:

“%” – The source is considered excluding the background;

“+” – The source is considered without excluding the background;

“-“The source is not considered and its contribution is not included in the background.

In case of absence of marking, no emission source is considered.

Types of sources:

1 – Point;

2 – Linear;

3 – Unorganized;

4 – A set of point sources combined as a single plane source;

5 – Unorganized, with emissions variable in time;

6 – Point, with umbrella-like or horizontal emission;

7 – A set of point sources with umbrella-like or horizontal emission;

8 – Motorway.

Substance:0301 Nitrogen dioxide (Nitrogen (IV) oxide)

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	2	3	%	0.0220090	1	0,4634	28,50	0,5000	0,4634	28,50	0,5000
Total:					0.0220090		0,4634			0,4634		

Substance:0304 Nitrogen (II) oxide (Nitrogen oxide)

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	2	3	%	0.0035760	1	0,0376	28,50	0,5000	0,0376	28,50	0,5000
Total:					0.0035760		0,0376			0,0376		

Substance:0328 Carbon (Soot)

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	2	3	%	0.0024220	1	0,0680	28,50	0,5000	0,0680	28,50	0,5000
Total:					0.0024220		0,0680			0,0680		

Substance:0330 Sulphur dioxide

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	2	3	%	0.0032660	1	0,0393	28,50	0,5000	0,0393	28,50	0,5000
Total:					0.0032660		0,0393			0,0393		

Substance:0333 Hydrogen sulphide

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	3	1	%	0.0000549	1	0,0952	17,10	0,5000	0,4247	7,67	0,5000
Total:					0.0000549		0,0952			0,4247		

Substance:0337 Carbon oxide

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	2	3	%	0.0625330	1	0,0527	28,50	0,5000	0,0527	28,50	0,5000
Total:					0.0625330		0,0527			0,0527		

Substance:2732 Oil fraction

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	2	3	%	0.0096920	1	0,0340	28,50	0,5000	0,0340	28,50	0,5000
Total:					0.0096920		0,0340			0,0340		

Substance:2754 Saturated hydrogensC12-C19

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	3	1	%	0.0195451	1	0,2710	17,10	0,5000	1,2095	7,67	0,5000
Total:					0.0195451		0,2710			1,2095		

Substance:2908 Inorganic dust: 70-20%SiO2

Group #	Shop #	Source #	Type	Registration	Emission (gr/sec)	F	Summer			Winter		
							Cm/MAC	Xm	Um (m/sec)	Cm/MAC	Xm	Um (m/sec)
0	0	1	1	%	0.0140000	1	0,0390	57,00	0,5000	0,1408	28,34	0,5000
0	0	4	3	%	0.1050000	3	4,4211	14,25	0,5000	4,4211	14,25	0,5000
0	0	5	3	%	0.0032507	3	0,1369	14,25	0,5000	0,1369	14,25	0,5000
0	0	6	3	%	0.0316746	3	1,3337	14,25	0,5000	1,3337	14,25	0,5000
0	0	7	3	%	0.0550048	3	2,3160	14,25	0,5000	2,3160	14,25	0,5000
Total:					0.2089301		8,2467			8,3485		

Emissions from sources for different substances

Registration:

Considered issues:

“%” – The source is considered excluding the background;

“+” – The source is considered without excluding the background;

“-“The source is not considered and its contribution is not included in the background.

In case of absence of marking, no emission source is considered.

Types of sources:

1 – Point;

2 – Linear;

3 – Unorganized;

4 – A set of point sources combined as a single plane source for calculation purposes;

5 – Unorganized, with emissions variable in time;

6 – Point, with umbrella-like or horizontal emission;

7 – A set of point sources with umbrella-like or horizontal emission;

8 – Motorway.

Total impact group: 6009

Gro und #.	p #.	Source #	Type	Registration	Code B-BA	Emission (gr/sec)	F	Summer			Winter		
								Cm/MAC	Xm	Um m/sec)	Cm/MAC	Xm	Um m/sec)
0	0	2	3	%	0301	0.0220090	1	0,4634	28,50	0,5000	0,4634	28,50	0,5000
0	0	2	3	%	0330	0.0032660	1	0,0393	28,50	0,5000	0,0393	28,50	0,5000
Total:						0.0252750		0,5026			0,5026		

Total impact group:6043

Gro und #.	p #.	Source #	Type	Registration	Code B-BA	Emission (gr/sec)	F	Summer			Winter		
								Cm/MAC	Xm	Um m/sec)	Cm/MAC	Xm	Um m/sec)
0	0	2	3	%	0330	0.0032660	1	0,0393	28,50	0,5000	0,0393	28,50	0,5000
0	0	3	1	%	0333	0.0000549	1	0,0952	17,10	0,5000	0,4247	7,67	0,5000
Total:						0.0033209		0,1345			0,4640		

Total impact group:6046

Gro und #.	p #.	Source #	Type	Registration	Code B-BA	Emission (gr/sec)	F	Summer			Winter		
								Cm/MAC	Xm	Um m/sec)	Cm/MAC	Xm	Um m/sec)
0	0	1	1	%	2908	0.0140000	1	0,0390	57,00	0,5000	0,1408	28,34	0,5000
0	0	2	3	%	0337	0.0625330	1	0,0527	28,50	0,5000	0,0527	28,50	0,5000
0	0	4	3	%	2908	0.1050000	3	4,4211	14,25	0,5000	4,4211	14,25	0,5000
0	0	5	3	%	2908	0.0032507	3	0,1369	14,25	0,5000	0,1369	14,25	0,5000
0	0	6	3	%	2908	0.0316746	3	1,3337	14,25	0,5000	1,3337	14,25	0,5000
0	0	7	3	%	2908	0.0550048	3	2,3160	14,25	0,5000	2,3160	14,25	0,5000
Total:						0.2714631		8,2993			8,4012		

The calculation was made for different substances (total impact groups)

Code	Substance	MAC	*MAC Correction coefficient / Reference safe impact	Baseline concentration

					Level		
		Type	Reference value	Value used in calculations		Consideration	Interpolation
0301	Nitrogen dioxide (Nitrogen (IV) oxide)	max. amount	0.2000000	0.2000000	1	No	No
0304	Nitrogen (II) oxide (Nitrogen oxide)	max. amount	0.4000000	0.4000000	1	No	No
0328	Carbon (Soot)	max. amount	0.1500000	0.1500000	1	No	No
0330	Sulphur dioxide	max. amount	0.3500000	0.3500000	1	No	No
0333	Hydrogen sulphide	max. amount	0.0080000	0.0080000	1	No	No
0337	Carbon oxide	max. amount	5.0000000	5.0000000	1	No	No
2732	Oil fraction	Referenec safe impact level	1.2000000	1.2000000	1	No	No
2754	Saturated hydrogens C12-C19	max. amount	1.0000000	1.0000000	1	No	No
2908	Inorganic dust: 70-20% SiO2	max. amount	0.3000000	0.3000000	1	No	No
6009	Incomplete total impact group, coefficient "1.6": Total impact group (2) 301 330	Group	-	-	1	No	No
6043	Summarized impact group: Summarized impact group (2) 330 333	Group	-	-	1	No	No
6046	Summarized impact group: Summarized impact group (2) 337 2908	Group	-	-	1	No	No

*Is applied if the use of special normative requirements is absolutely necessary. In case the value of “MAC/SRLI correction coefficient” is changed, with its standard value equaling 1, the values of maximum concentration must be compared not to the coefficient value, but to 1.

Selection of design meteorological parameters during the calculation

Automated selection

Wind velocities are selected automatically

Wind direction

Sector start	Sector end	Wind selection step
0	360	1

Reference area

Control Sites

№	Type	Full description of the site				Width (m)	Step (m)		Height (m)	Comment
		Middle point coordinates I side (m)		Middle point coordinates II side (m)			X	Y		
		X	Y	X	Y					
1	Given	- 2000	- 300	1000	-300	2000	100	100	2	

Control points

№	Point coordinates (m)		Height (m)	Type of point	Comment
	X	Y			
5	28,00	566,00	2	500 m zone	N
6	817,00	-206,00	2	500 m zone	E
7	117,00	-910,00	2	500 m zone	S
8	-673,00	-146,00	2	500 m zone	W
1	-1479,00	-393,00	2	Point at the border of the residential zone	The nearest settlement westwards (direct distance 1,33 km)
2	-1005,00	-747,00	2	Point at the border of the residential zone	The nearest settlement South-west (direct distance 1,00 km)
3	-312,00	-1108,00	2	Point at the border of the residential zone	The nearest settlement southwards (direct distance 0,83 km)
4	-149,00	-1267,00	2	Point at the border of the residential zone	The nearest settlement southwards (direct distance 0,89 km)

Calculation results for different substances (design grounds)

Types of points:

0 – User's design point; 1 – A point at the border of the protection zone; 2 - A point at the border of the production zone; 3 - A point at the border of the sanitary-protection zone; 4 - A point at the border of the residential zone; 5 - A point at the border of the accommodation zone.

№	Coordinate X(m)	Coordinate Y(m)	Height (m)	Concentration (MAC share)	Wind direction	Wind velocity	Background (MAC share)	Background before exclusion	Type of point
---	-----------------	-----------------	------------	---------------------------	----------------	---------------	------------------------	-----------------------------	---------------

Substance:0301 Nitrogen dioxide (Nitrogen (IV) oxide)

8	-673	-146	2	0.02	88	8,36	0.000	0.000	3
5	28	566	2	0.02	190	12,50	0.000	0.000	3
7	117	-910	2	0.01	345	12,50	0.000	0.000	3
6	817	-206	2	0.01	275	12,50	0.000	0.000	3
3	-312	-1108	2	9.9e-3	12	12,50	0.000	0.000	4
2	-1005	-747	2	8.7e-3	55	12,50	0.000	0.000	4
4	-149	-1267	2	8.3e-3	3	12,50	0.000	0.000	4
1	-1479	-393	2	6.1e-3	79	12,50	0.000	0.000	4

Substance:0304 Nitrogen (II) oxide (Nitrogen oxide)

8	-673	-146	2	1.4e-3	88	8,36	0.000	0.000	3
5	28	566	2	1.2e-3	190	12,50	0.000	0.000	3
7	117	-910	2	1.0e-3	345	12,50	0.000	0.000	3
6	817	-206	2	8.9e-4	275	12,50	0.000	0.000	3
3	-312	-1108	2	8.1e-4	12	12,50	0.000	0.000	4

2	-1005	-747	2	7.1e-4	55	12,50	0.000	0.000	4
4	-149	-1267	2	6.8e-4	3	12,50	0.000	0.000	4
1	-1479	-393	2	5.0e-4	79	12,50	0.000	0.000	4

Substance:0328 Carbon (Soot)

8	-673	-146	2	2.6e-3	88	8,36	0.000	0.000	3
5	28	566	2	2.2e-3	190	12,50	0.000	0.000	3
7	117	-910	2	1.8e-3	345	12,50	0.000	0.000	3
6	817	-206	2	1.6e-3	275	12,50	0.000	0.000	3
3	-312	-1108	2	1.5e-3	12	12,50	0.000	0.000	4
2	-1005	-747	2	1.3e-3	55	12,50	0.000	0.000	4
4	-149	-1267	2	1.2e-3	3	12,50	0.000	0.000	4
1	-1479	-393	2	8.9e-4	79	12,50	0.000	0.000	4

Substance:0330 Sulphur dioxide

8	-673	-146	2	1.5e-3	88	8,36	0.000	0.000	3
5	28	566	2	1.3e-3	190	12,50	0.000	0.000	3
7	117	-910	2	1.0e-3	345	12,50	0.000	0.000	3
6	817	-206	2	9.2e-4	275	12,50	0.000	0.000	3
3	-312	-1108	2	8.4e-4	12	12,50	0.000	0.000	4
2	-1005	-747	2	7.4e-4	55	12,50	0.000	0.000	4
4	-149	-1267	2	7.1e-4	3	12,50	0.000	0.000	4
1	-1479	-393	2	5.2e-4	79	12,50	0.000	0.000	4

Substance:0333 Hydrogen sulphide

6	817	-206	2	2.5e-3	272	12,50	0.000	0.000	3
7	117	-910	2	1.5e-3	13	12,50	0.000	0.000	3
5	28	566	2	1.4e-3	161	12,50	0.000	0.000	3
8	-673	-146	2	1.0e-3	92	12,50	0.000	0.000	3
3	-312	-1108	2	8.1e-4	33	12,50	0.000	0.000	4
4	-149	-1267	2	7.3e-4	22	12,50	0.000	0.000	4
2	-1005	-747	2	5.1e-4	67	12,50	0.000	0.000	4
1	-1479	-393	2	3.3e-4	83	12,50	0.000	0.000	4

Substance:0337 Carbon oxide

8	-673	-146	2	2.0e-3	88	8,36	0.000	0.000	3
5	28	566	2	1.7e-3	190	12,50	0.000	0.000	3
7	117	-910	2	1.4e-3	345	12,50	0.000	0.000	3
6	817	-206	2	1.2e-3	275	12,50	0.000	0.000	3
3	-312	-1108	2	1.1e-3	12	12,50	0.000	0.000	4
2	-1005	-747	2	9.9e-4	55	12,50	0.000	0.000	4
4	-149	-1267	2	9.5e-4	3	12,50	0.000	0.000	4
1	-1479	-393	2	6.9e-4	79	12,50	0.000	0.000	4

Substance:2732 Oil fraction

8	-673	-146	2	1.3e-3	88	8,36	0.000	0.000	3
5	28	566	2	1.1e-3	190	12,50	0.000	0.000	3
7	117	-910	2	9.1e-4	345	12,50	0.000	0.000	3
6	817	-206	2	8.0e-4	275	12,50	0.000	0.000	3

3	-312	-1108	2	7.3e-4	12	12,50	0.000	0.000	4
2	-1005	-747	2	6.4e-4	55	12,50	0.000	0.000	4
4	-149	-1267	2	6.1e-4	3	12,50	0.000	0.000	4
1	-1479	-393	2	4.5e-4	79	12,50	0.000	0.000	4

Substance:2754 Saturated hydrogensC12-C19

6	817	-206	2	7.1e-3	272	12,50	0.000	0.000	3
7	117	-910	2	4.4e-3	13	12,50	0.000	0.000	3
5	28	566	2	3.9e-3	161	12,50	0.000	0.000	3
8	-673	-146	2	2.9e-3	92	12,50	0.000	0.000	3
3	-312	-1108	2	2.3e-3	33	12,50	0.000	0.000	4
4	-149	-1267	2	2.1e-3	22	12,50	0.000	0.000	4
2	-1005	-747	2	1.4e-3	67	12,50	0.000	0.000	4
1	-1479	-393	2	9.3e-4	83	12,50	0.000	0.000	4

Substance:2908 Inorganic dust: 70-20%SiO2

7	117	-910	2	0.10	0	12,50	0.000	0.000	3
5	28	566	2	0.09	173	12,50	0.000	0.000	3
6	817	-206	2	0.09	271	12,50	0.000	0.000	3
8	-673	-146	2	0.07	93	12,50	0.000	0.000	3
3	-312	-1108	2	0.05	25	12,50	0.000	0.000	4
4	-149	-1267	2	0.04	14	12,50	0.000	0.000	4
2	-1005	-747	2	0.03	64	12,50	0.000	0.000	4
1	-1479	-393	2	0.02	83	12,50	0.000	0.000	4

Substance:6009 Summarized impact group (2) 301330

8	-673	-146	2	0.01	88	8,36	0.000	0.000	3
5	28	566	2	0.01	190	12,50	0.000	0.000	3
7	117	-910	2	8.4e-3	345	12,50	0.000	0.000	3
6	817	-206	2	7.4e-3	275	12,50	0.000	0.000	3
3	-312	-1108	2	6.7e-3	12	12,50	0.000	0.000	4
2	-1005	-747	2	5.9e-3	55	12,50	0.000	0.000	4
4	-149	-1267	2	5.6e-3	3	12,50	0.000	0.000	4
1	-1479	-393	2	4.1e-3	79	12,50	0.000	0.000	4

Substance:6043 Summarized impact group (2) 330333

6	817	-206	2	3.3e-3	273	12,50	0.000	0.000	3
8	-673	-146	2	2.3e-3	90	12,50	0.000	0.000	3
7	117	-910	2	1.5e-3	13	12,50	0.000	0.000	3
5	28	566	2	1.4e-3	161	12,50	0.000	0.000	3
3	-312	-1108	2	8.4e-4	12	12,50	0.000	0.000	4
2	-1005	-747	2	8.4e-4	57	12,50	0.000	0.000	4
1	-1479	-393	2	7.9e-4	81	12,50	0.000	0.000	4
4	-149	-1267	2	7.3e-4	22	12,50	0.000	0.000	4

Substance:6046 Summarized impact group (2) 337 2908

7	117	-910	2	0.10	0	12,50	0.000	0.000	3
5	28	566	2	0.09	173	12,50	0.000	0.000	3
6	817	-206	2	0.09	272	12,50	0.000	0.000	3

8	-673	-146	2	0.07	93	12,50	0.000	0.000	3
3	-312	-1108	2	0.05	25	12,50	0.000	0.000	4
4	-149	-1267	2	0.04	14	12,50	0.000	0.000	4
2	-1005	-747	2	0.03	63	12,50	0.000	0.000	4
1	-1479	-393	2	0.02	82	12,50	0.000	0.000	4

13.5 Annex 5. Taxation list of timber resources

Territorial body with land management authority: City Hall of Marneuli Municipality

Territory adjacent to village Kapanakhchi -11 342 sq.m

Slope inclination (degree): 5

Number of timber resources with the diameter of 8 cm and more subject to taxation (pcs.), volume (cub.m) according to diameters and species of timber resources

#	Species	Species (Latin name)	Diameter (D)	Number of trees	Volume (V)	Note
1	2	3	4	5	6	7
1	Gleditschia	<i>Gleditsia caspia</i>	8	3	0.066	III-Degree
			10	2	0.072	
			16	1	0.098	
Total of Gleditschia					6	0.236
2	Silver wattle	<i>Acacia dealbat</i>	8	3	0.528	III-Degree
			10	1	0.432	
			12	5	0.108	
			14	2	0.076	
Total of Silver wattle				39	1.144	
3	White poplar	<i>Populus alba</i>	20	2	0.444	III-Degree
			24	1	0.344	
			28	2	0.978	
			32	1	0.67	
				6	2.436	
Total of White poplar					4	3.52
4	Silver poplar	<i>Populus pyramidalis</i>	40	3	3.63	
			44	3	4.23	
			48	3	5.16	
Total of Silver poplar					13	16.54
5	Mulberry	<i>Morus alba</i>	8	9	0.198	V Degree
			10	10	0.38	
			12	11	0.627	
			14	3	0.249	
			16	2	0.22	
			18	3	0.42	
			20	1	0.18	
			24	1	0.28	
		28	1	0.4		

			32	2	1.12	
			36	3	0.72	
			40	2	1.86	
			44	3	3.48	
			48	2	2.84	
			52	4	6.84	
			64	1	2.72	
Total of mulberry				56	22.534	
6	Cherry plum	<i>Prunus insititia</i>	8	3	0.054	VII Degree
			10	3	0.093	
				6	0.147	
Total:				126	43.037	

Besides, the timber resources with the diameter of <8 cm was registered in the following number					Note
Silver wattle	275	pcs.	0.15	cub.m	
Elm tree	30	pcs.	0.05	cub.m	
Mulberry	65	pcs.	0.05	cub.m	
White poplar	101		0.1		
Cherry plum	125	pcs.	0.05	cub.m	
Swida Thelycrania	55	pcs.	0.005	cub.m	
Blackberry	1650	pcs.	0.005	cub.m	
Total:	2301	pcs.	0.41	cub.m	
Sum:	2427	pcs.	43.447	cub.m	

Date of the list compilation: 25.04.2019



General Location Plan

**Marneuli Munisipaloty City Hall
Adjacent to village Kapanakhchi**

Area to cut down



Area: 1.1342 ha

	N	X	Y
+	1	493703	4582752
+	2	487653	4578395

13.6 Annex 6. Waste Management Plan

Introduction

The present document is the waste management plan for the waste generated during the construction and operation of Algeti-Sadakhlo Road of East-West Highway (E-60). The Plan is a live document and may be corrected as necessary.

The present document is the waste management plan for the waste generated during the construction and operation of Rustavi-Red Bridge Road of East-West Highway (E-60). The Plan is a live document and may be corrected as necessary.

During the planned activity, non-hazardous and inert materials are expected to originate, as well as hazardous materials. Consequently, a plan to manage the waste originated during the project construction and operation phases is developed. The plan has the following sections:

- Goals, objectives and ways of achievement.
- Waste management hierarchy and approaches;
- Institutional plan in Georgia, which is responsible for waste management and monitoring;
- Information about the originated waste;
- Information about the waste prevention and remediation measures;
- Methods of separation of the originated waste;
- Temporary storage of waste;
- Waste transportation;
- Waste resource-use and/or methods of waste treatment;
- Information about potential sub-contractors;
- Waste handling;
- Waste management monitoring.

Goals, objectives and ways to achieve them

The objective of the present waste management plan is to protect environmental and human health what is achieved:

1. By preventing or reducing waste generation and its negative impact;
2. By designing efficient waste management mechanisms;
3. By reducing the harm caused by using resources at the expense of more efficient resource use.

These objectives can be achieved by full mobilization of the resources available to the construction contractor and project owner (infrastructural, human), who have the capability to accomplish the following tasks:

- All actions in waste management are realized in line with the requirements of the waste management policy and waste management legislation of Georgia;
- Avoiding and/or reducing waste generation to the extent possible both, in the construction and operation phases;

- Identifying waste originated in the construction and operation phases according to the types, properties and content of waste (the waste, which cannot be identified will be considered hazardous waste);
- Waste collection;
- During the transportation and processing, environmental pollution, debris accumulation and harmful impact on human health must be excluded to the extent possible;
- Undertaking obligation to take care and realize cleaning measures in case of environmental pollution or debris accumulation during the waste transportation;
- Handing over the waste to the relevant object for treatment, which has relevant certificate and registration;
- Undertaking responsibility and controlling the management process of the waste handed over to the contractor through total remediation.

If the construction contractor and/or project owner lacks resources to meet the requirements above, it is obliged to attract additional human resources and/or update the information.

Institutional plan in Georgia responsible for waste management and monitoring

Responsibility of state structures

The Ministry of Environmental Protection and Natural Resources of Georgia is the principal body charged with developing and realizing the state policy in the field of waste management. The competence of the Ministry of Environmental protection and Agriculture of Georgia is as follows:

- a) Developing and realizing a single state policy in the field of waste management;
- b) State registration of waste and keeping database;
- c) Developing the waste management national strategy and biodegradable municipal waste strategy;
- d) Developing waste management national action plan, coordinating its realization and reporting;
- e) Issuing permit for activities related to waste management and registration;
- f) Supporting the waste prevention, separation, reuse and recycling measures;
- g) Realizing state control of waste management.

The Ministry of Labor, Health and Social Affairs of Georgia together with the Ministry of Environmental protection and Agriculture of Georgia, regulates and controls medical waste management under the established rule.

The Ministry of Environmental protection and Agriculture of Georgia regulates and supervises animal waste under the rule established by the legislation.

The agency within the system of the Ministry of Economics and Sustainable Development of Georgia issues the permits for vehicles to be used to transport waste.

The Ministry of Environmental protection and Agriculture of Georgia, together with the Ministry of Finance of Georgia, regulates cross-border transportation of waste.

“Solid Waste Management Company of Georgia” Ltd.

Management of solid domestic waste is a question of national, regional and local importance for Georgia. The Government of Georgia has defined the management of solid domestic waste polygons as one of the severest problems and with this purpose started reforming the existing system. Within the limits of the reform, on April 24, 2012, “Solid Waste Management Company of Georgia” Ltd. was established within the system of the Ministry of Regional Development and Information of Georgia. The company is 100% state-owned. The company manages solid domestic waste polygons all over Georgia, except Tbilisi and autonomous Republic of Ajara.

The goal of the company is:

- Reducing negative impact of waste disposal and processing on the environment;
- Avoiding and minimizing waste origination;
- Reducing the number of existing polygons and gradually closing of all polygons inconsistent with the EU Directives;
- Providing relevant information on the polygon for separation and processing;
- Providing safe conditions and modern working environment for the employees;
- Supporting the better living standards of the population by accenting orienting on the aspects of sustainable management of solid waste;
- Providing an efficient system to share cooperation and experience between the company and the municipalities.
- Close cooperation with all interested parties, including ministries, local municipalities and other bodies responsible for various aspects of waste management system;
- Observing EC Directives in the field of solid waste management.

The mission of the company is:

- Improving the receipt of waste on the polygons;
- Putting the polygons owned by the company to order and to trouble-free mode of operation;
- Improving the registration system of waste on polygons;
- Considering environmental impact, labor safety and human health, including technical and infrastructural measures in managing the polygons;
- Specifying the number of new regional sanitary polygons and reloading stations;
- Remediation and closure of highly risky polygons;
- Professional development of the company employees regarding different issues of waste management, including technical, economic, administrative and legal issues;
- Developing an efficient system to compensate costs.
- Introducing mechanisms of separation, treatment and recycling at the source by cooperating with the municipalities.

Participation of private sector in waste management

In the field of waste management, in line with the state strategy, the funds of the state budget must be mainly used for the rehabilitation/conservation of the existing landfills, while the establishment of waste processing plants on the new polygons must be a concern for the private sector. Since the enforcement of the Waste management Code of Georgia, the number of private companies owning a license to manage various types of waste has drastically increased.

Waste management hierarchy and principles

In Georgia, the waste management policy and Georgian legislation in waste management field are based on the following hierarchy⁶:

- Prevention;
- Preparation for reusing;
- Recycling;
- Other recovery types, including energy recovery;
- Disposal.

When defining certain responsibilities regarding the waste management hierarchy, the following should be considered:

- Environmental benefits;

¹⁶ Waste Management Code – Article 4. Waste management Hierarchy

¹⁷ ნარჩენების მართვის კოდექსი - მუხლი 5. ნარჩენების მართვის პრინციპები

Table 13.6.1 Types and amounts of expected waste during the project implementation

Waste Code	Waste Description	Hazardous (Yes/No)	Index of hazard	Approximate amount of waste originated during the construction	Approximate amount of waste originated during the technical maintenance in the operation phase (annually)	Disposal/recovery operations	Basel Convention Code
08 01 11*	waste paint and varnish containing organic solvents or other hazardous substances.	Yes	H 6	100-200 kg	<10 kg	<p>1. Best practice: The waste will be returned to the producer by based on an agreement.</p> <p>2. The waste will be handed over to the company with relevant license for further management</p>	Y9
16 06 01*	Lead batteries	Yes	H 15	20-30 pcs.	-	The waste will be handed over to the company with relevant license for further management	Y31
16 01 03	end-of-life tyres	No	-	40-50 pcs.	-	The waste will be handed over to the company with relevant license for further management	
16 01 07*	oil filters	Yes	H 15	50-60 pcs.	-	The waste will be handed over to the company with relevant license for further management	Y31
16 01 17 16 01 18	ferrous metal non-ferrous metal	No	-	3-4 t	-	The waste will be scrapped	Y17
20 03 01	mixed municipal waste	No	-	200 m ³	-	The domestic waste will be collected in special containers bearing special marking. The domestic waste accumulated on the construction grounds will be taken to the local landfill.	

17 05 05*	dredging spoil containing dangerous substances (soil and ground polluted with oil hydrocarbons)	Yes	H 15	Impossible to specify in advance. Depends on the scales of spills.		The waste will be handed over to the company with relevant license for further management	Y9
11 01 13*	degreasing wastes containing dangerous substances	Yes	H 6	30-50 l	-	The waste will be handed over to the company with relevant license for further management	Y9
17 02 01	wood	No		>1000 m ³	-	The waste will be disposed to the site specified by LEPL „National Forest Agency“ and will be handed over to the Agency for further management	
15 02 02*	oily cloths (cleaning rugs and protective clothes)	Yes	H 15	60-70 kg	-	The waste will be handed over to the company with relevant license for further management	Y9
16 01 19	plastic	No		100 kg		The waste will be handed over to the company with relevant license for further re-processing	Y17
08 03 17*	waste printing toner containing dangerous substances	Yes	H 6	40-50 pcs.	-	The waste will be handed over to the supplier for further processing/recovery	Y31

Waste management procedures

General requirements for safe waste handling

1. The personnel engaged in the waste management (collection, storage, transportation, receipt/delivery) would have undergone appropriate training on health and safety issues;
2. Staff will be provided with special uniforms, footwear and personal protective equipment. If necessary, staff clothing are subject to special treatment, especially after performing works related to hazardous waste;
3. Personnel should be able to render first aid in case of poisoning or trauma during working with waste;
4. A person who has not taken the proper training, has no special clothing or has signs of sickness, will not be allowed to the working area;
5. On the site of waste generation, the disposal of waste, more than allowable rate, is prohibited. The waste disposal is not allowed near the igneous and sparking sources.
6. In case of disposing several types of waste together, their compatibility will be considered;
7. Storing of strange objects, personnel clothing, uniforms, individual protection means, as well as eating on waste accumulation area is prohibited;
8. During working with waste, personal hygiene norms should be protected; after finishing the work it is necessary to wash hands with soap and warm water;
9. In case there are some signs of poisoning, a person should stop working and must apply to the nearest medical center and notify the authorities of the structural unit;
10. Firefighting equipment will be provided on fire hazardous waste collection sites. In such areas, smoking and using open fire is strictly forbidden;
11. Personnel should be aware of the waste properties and firefighting rules. Extinguishing of burning easily inflammable or combustible liquids is possible through fire-extinguishers, sand or asbestos tissues;
12. Extinguishing burning solvents with water is prohibited.

Waste management procedures and rules

The given section describes the measures and rules, which must be observed (prior to processing and/or destruction) for the waste management purposes. The management measures are considered according to the following priorities.

Waste classification

Further waste management greatly depends on the waste classification at the place of origin. Depending on types of waste, segregation, meeting the requirements for their storage and processing/destruction finally – all these procedures need due waste classification.

It is necessary to identify waste categories, take samples, examine or test them or subject them to laboratory analysis in order to classify them in line with the EU standards and to specify the following issues:

- The category to which the given waste belongs to – hazardous, non-hazardous or inert;
- The way the waste must be managed.

The person charged with waste management and responsible for waste classification:

- Will use temporary waste inventory list, which describes a wide range of expected waste types;
- If the given type of waste is not incorporated in the inventory list, other auxiliary methods will be used to classify the waste.
- If the general methods to classify the waste are not thorough, the waste samples will be taken and tested at the laboratory in order to classify the waste in line with the given Table.

The data in the table below are given according to the I and II annexes to the Waste management Code.

Table: Recovery and disposal operations Codes

Waste Code	Waste description	Hazardous (Yes/No)	Recovery operation code	Disposal operation code
08 01 11*	Waste paints or lacquer, containing organic solvent or other hazardous chemical substance.	Yes	R2	-
16 06 01*	Lead-containing batteries, batteries	Yes	R4	
16 01 03	Tires to destruct საბურავები	No	R5	
16 01 07*	Oil filters	Yes		D10
16 01 17 16 01 18	Black metals Nonferrous materials	No	R4	
20 03 01	Mixed municipal waste	No	-	D1
17 05 05*	Ground containing hazardous substances (soil and ground polluted with oil hydrocarbons)	Yes	R9	D2
11 01 13*	Lubrication waste containing hazardous substances	Yes	R9	
17 02 01	Wood	No	R13	

08 03 17*	Printer toners/ink remains containing hazardous substances	Yes	-	D9
15 02 02*	Oily cloths (cleaning rugs and protective clothes)	Yes	-	D10
16 01 19	Plastic	No	-	D1
17 05 06	Ground not included in clause 17 05 05(ground stripped during the earthworks)	No	R10	D5

Inventory:

Following the waste classification, which must determine any potential threat of waste, the person responsible for waste management, will draft the waste inventory list, which incorporates the following information:

- Waste flows and sources;
- Description and classification of waste flows and; e.g. if the waste is hazardous or not;
- Rules of storage as necessary;
- Quantitative indicators of waste – annual, quarterly or monthly, as necessary.

The inventory records are kept by the persons responsible for waste management either annually, or at making relevant a change. The copies of the waste inventory lists will be presented to the enterprise management. The records are updated only the persons specially trained in using the waste inventory list.

The waste inventory sample forms are given in the Table below

Table: Waste inventory sample

		Part 1
Information about the waste originator		
Company:		
Name, Registration no.		
Representative:		
Name, position, contact information		
Legal address:		
region, municipality, city, street		
telephone number, fax number, e-mail		
Location of waste origination:		
region, municipality, city, street		
Contact person at the waste origination facility:		
Name, position, contact information		

Part 2

List of waste originated at the facility					
Waste Code	Waste description	Hazardous (Yes/No)	Degree of hazard	Disposal/recovery operations	Code of Basel Convention

The right waste inventory is necessary to solve the following issues:

- What type of treatment (if any) does the given waste need?
- What kind of handling (if any) does the given waste need (e.g. PPE or other)?
- How must the given waste be stored (if any)?
- What is the rule of final processing/destruction?

The goal of inventory and following measures, including labeling, is to provide the information and therefore, to destruct the waste in a safe manner.

Waste segregation and collection:

Special containers must be placed near the waste origination site. Waste must be segregated on the waste origination site and placed in relevant containers.

As a result of the activity, waste is originated and accumulated at different sites, which are subject to inventory/registration, collection, temporary storage, removal, neutralization, recycling and or disposal.

A method of collecting industrial and domestic waste must be organized at the facility depending the categories and class of hazard of the waste.

The following types of waste are subject to collection and segregation:

- Domestic waste;
- Industrial waste, which is not forbidden to dispose to the polygon of solid domestic waste e.g. paronite, rubber waste, domestic plastic items, wooden and paper tare, timber and sawdust waste, polyethylene pipes, sandpaper leftovers, etc.)
- Mercury-containing substances and materials;
- Lead-containing waste;
- Oily cleaning cloths, used respiratory filters;
- Oil products leftovers, including the waste accumulated in settling tanks;
- Used industrial oils, lubricants;
- Materials used in liquidation works in case of oil spills;
- Polluted soil and sand;
- Metal scrap, leftovers of welding electrodes;
- Used rubber pipes, used tires;
- Remains of used lead batteries;
- Paint and paint can waste;
- Medical waste.

Labeling:

The persons responsible for waste management are obliged for labeling waste containers to allow identifying and specifying describing precisely their content. This is necessary for the outsider personnel would be able to observe safety rules. The waste, whose types are not specified are considered hazardous

waste and will be subject to the above-given classification.

All containers on site (jugs, roller boxes, barrels, etc.) must have relevant labels to make it clear what kind of waste is to be put in some or other container. In order to avoid misunderstanding, old labels must be removed.

The informative warning signs under the legislation of Georgia are given below.

 No Smoking	 Subject to recycling	 For domestic waste	 Fire-hazardous
 Explosive substance and make	 Toxic gas and substance	 Inflammable gas and liquid	 Inflammable solid substance
 Other hazardous substance and make	 Self-ignition substance	 Non-toxic gas	 Hazardous under water action
 Infection danger	 Oxidizing substance	 Corrosive substance	 Radioactive substance

Storage of waste:

The waste must remain on site for the least possible time and must be removed for processing or destruction as soon as possible.

The waste storage sites must be shown on the relevant facility plan. The waste must be stored in the manner as to exclude:

- Accidental leakage and spills, pollution of ground or underground waters, breaking of containers due to accidental crash, contact with air during secondary packing and/or using the caps;
- Container corrosion or wear under the action of environment or remains in them. For this reason, the containers resistant to concrete waste must be selected, e.g. car batteries must be placed on the plastic boards resistant to corrosion;
- Theft due to unsafe storage of waste within the protected perimeter of the object.

The waste containers must comply with the sizes, shape, content and class of hazard of the waste to store in them. Only good containers must be used, with well their caps locked trouble-free. The containers which may react with its content, or from which hazardous substance may leak out, are inadmissible to us. Only one type of hazardous waste can be placed in one container. It is inadmissible to mix solid and liquid wastes.

Accumulation or storage the waste for long on the territory of the enterprise is inadmissible. It is admissible to accumulate or store the waste for a short term, if:

- The waste is used in the following technological cycle with total utilization;
- There is no user present, etc.
- Following the toxicological and physical-chemical properties of the waste and its components, their temporary storage is inadmissible;
- Temporary storage is admissible in a non-stationary warehouse;
- On the open ground;
- The places of temporary storage on the territory of the object are specified during the inventory of the waste and must comply with the following requirements;
- The ground cover must be hard (concrete, reinforced concrete or concrete slabs);
- Fencing or embankment must be provided along the whole perimeter of the ground to prevent the harmful substances from getting in the sewerage or soil;
- The ground must have a suitable access road;
- The waste must be efficiently protected against atmospheric precipitations and wind (by using a shed, placing waste in tare, containers, etc.).

In case of temporary storage of waste in non-stationary warehouses or on the grounds the following conditions must be observed: the possibility of the waste to get in the effluent waters or on the soil must be excluded.

Hazardous waste can be stored temporarily in a stationary warehouse and a special warehouse is to be assigned on the territory for this purpose, by observing the environmental requirements, in particular:

- The floor and walls of the warehouse must be faced with ceramic tiles;
- The warehouse ceiling must be painted with a wet-resistant paint;
- The warehouse must be equipped with the following appliances:
- Exhaust ventilation system;
- Wash-bowl and tap to water and wash the territory;

- Floor drain;
- There must be gratings on the door and windows;
- Shelves must be provided for the waste;
- The waste is admissible to store only in hermetic tare, packed, with relevant labeling.

Removal of hazardous waste from the territory of the enterprise and its further management must be provided by the company duly licensed for this activity.

The rule to hand over the waste

Waste must be handed over by filling in the relevant waste handing form. In all cases, the following information is required:

- Date of handing over, by indicating the waste amount;
- Information about the waste producer;
- Information about the waste transportation company;
- Information about the waste receiving company;
- Signatures of the producing, transportation and receiving companies.

The filled-in form of waste handing over must be enclosed to all waybills from the waste origination place to the object treatment or destruction point, i.e. to the wastewater treatment plant, crematorium, landfill, etc.

Each waste hand over form must give a full description of waste, its content, production process, packing rule, total amount of the handed-over waste and other relevant information.

The waste hand over form must be filled in 3 copies. A formal procedure of waste hand over is as follows:

- The waste hand over form is signed by duly authorized persons and sub-contractor, who is charged with waste disposal and transportation;
- The first copy remains with the facility and is kept with the archives;
- The other two copies accompany the waste on their way to processing, neutralizing or place of disposal.
- At the waste receiving object, the transportation company is obliged to have the duly authorized person sign the form, where it must be indicated that the waste was received at the designation point;
- Thereafter, the second copy remains with the receiving object;
- The third copy remains with the transportation company, who takes it to its office;
- By the following term of waste disposal, the transportation company must return the third copy of the form to the waste origination site;
- The third copy will remain with the waste origination site and is kept together with the first copy;
- A photo-copy of the third copy of the form is provided by the waste origination site and is forwarded to the environmental protection department for reporting purposes.

The filled-in forms of waste hand-over are kept for the whole contract period.

The responsible person is obliged not to hand over the waste or sign the waste hand-over form if he has a firm basis to think that the waste did not reach the place of designation in a due manner. A sample of the waste hand-over form is given below.

The waste must remain on the site of accumulation for the least possible time and must be removed for processing or destruction as soon as possible.

The waste storage sites must be shown on the facility plan. The waste must be stored in the manner as to exclude:

- Accidental leakage and spills, pollution of ground or underground waters, breaking of containers due to accidental crash, contact with air during secondary packing and/or using the caps;
- Container corrosion or wear under the action of environment or remains in them. For this reason, the containers resistant to concrete waste must be selected, e.g. car batteries must be placed on the plastic boards resistant to corrosion;
- Theft due to unsafe storage of waste within the protected perimeter of the object.

The waste containers must comply with the sizes, shape, content and class of hazard of the waste to store in them. Only good containers must be used, with well their caps locked trouble-free. The containers which may react with its content, or from which hazardous substance may leak out, are inadmissible to us. Only one type of hazardous waste can be placed in one container. It is inadmissible to mix solid and liquid wastes.

Accumulation or storage the waste for long on the territory of the enterprise is inadmissible. It is admissible to accumulate or store the waste for a short term, if:

- The waste is used in the following technological cycle with total utilization;
- There is no user present, etc.
- Following the toxicological and physical-chemical properties of the waste and its components, their temporary storage is inadmissible;
- Temporary storage is admissible in a non-stationary warehouse;
- On the open ground.

The places of temporary storage on the territory of the object are specified during the inventory of the waste and must comply with the following requirements:

- The ground cover must be hard (concrete, reinforced concrete or concrete slabs);
- Fencing or embankment must be provided along the whole perimeter of the ground to prevent the harmful substances from getting in the sewerage or soil;
- The ground must have a suitable access road;
- The waste must be efficiently protected against atmospheric precipitations and wind (by using a shed, placing waste in tare, containers, etc.).

In case of temporary storage of waste in non-stationary warehouses or on the grounds the following conditions must be observed: the possibility of the waste to get in the effluent waters or on the soil must be excluded.

Hazardous waste can be stored temporarily in a stationary warehouse and a special warehouse is to be assigned on the territory for this purpose, by observing the environmental requirements, in particular:

- The floor and walls of the warehouse must be faced with ceramic tiles;
- The warehouse ceiling must be painted with a wet-resistant paint;
- The warehouse must be equipped with the following appliances:
 - Exhaust ventilation system;
 - Wash-bowl and tap to water and wash the territory;
 - Floor drain;
 - There must be gratings on the door and windows;
 - Shelves must be provided for the waste;

The waste is admissible to store only in hermetic tare, packed, with relevant labeling.

Removal of hazardous waste from the territory of the enterprise and its further management must be provided by the company duly licensed for this activity.

The rule to hand over the waste:

Waste must be handed over by filling in the relevant waste handing form. In all cases, the following information is required:

- Date of handing over, by indicating the waste amount;
- Information about the waste producer;
- Information about the waste transportation company;
- Information about the waste receiving company;
- Signatures of the producing, transportation and receiving companies.

The filled-in form of waste handing over must be enclosed to all waybills from the waste origination place to the object treatment or destruction point, i.e. to the wastewater treatment plant, crematorium, landfill, etc.

- Each waste hand over form must give a full description of waste, its content, production process, packing rule, total amount of the handed-over waste and other relevant information.
- The waste hand over form must be filled in 3 copies. A formal procedure of waste hand over is as follows:
- The waste hand over form is signed by duly authorized persons and sub-contractor, who is charged with waste disposal and transportation;
- The first copy remains with the facility and is kept with the archives;
- The other two copies accompany the waste on their way to processing, neutralizing or place of disposal.

- At the waste receiving object, the transportation company is obliged to have the duly authorized person sign the form, where it must be indicated that the waste was received at the designation point;
- Thereafter, the second copy remains with the receiving object;
- The third copy remains with the transportation company, who takes it to its office;
- By the following term of waste disposal, the transportation company must return the third copy of the form to the waste origination site;
- The third copy will remain with the waste origination site and is kept together with the first copy;
- A photo-copy of the third copy of the form is provided by the waste origination site and is forwarded to the environmental protection department for reporting purposes.

The filed-in forms of waste hand-over are kept for the whole contract period.

The responsible person is obliged not to hand over the waste or sign the waste hand-over form if he has a firm basis to think that the waste did not reach the place of designation in a due manner. A sample of the waste hand-over form is given below.

Table. Waste hand-over form

№	Information about the waste originator	Information about the waste carrier	Information about the waste receiver	Waste content	Rule/place of origin	Kind of package

№	Type of waste	Amount of waste	Duration of waste origination	Number and name of the vehicle used to transport waste	Driver's signature	Time of removal of the waste from the place of origin	Time of receiving the waste at the receiving point	Waste originator's signature	Waste receiver's signature

Waste originating organization _____ Seal

Waste receiving organization _____ Seal

(to be filled in 3 copies, with one copy remaining with the waste originator, the second copy is remained with the driver and the third copy is remained with the waste receiver. After transporting the waste, the driver returns his copy to the waste originator).

Transportation of waste:

The waste will be transported with a full compliance with the sanitary and environmental rules and by observing the safety rules to transport hazardous shipments. All operations of waste loading/unloading must be mechanized to the extent possible and must be hermetic.

Loss or scattering of waste must be excluded during the transportation. When transporting hazardous waste to a temporary warehouse, the accompanying person must have a request for hazardous waste certified by the plant manager. The waste carrier ensures the relevant vehicle, loading and transportation of hazardous waste to the relevant location by full observance of sanitary, environmental and safety rules.

As soon as the operation is complete, the vehicle must be duly cleaned, washed and sterilized. The vehicle used to transport the waste must bear relevant warning sign. The waste subject to secondary treatment (recycling) must be taken from the plant territory by a duly licensed contracting company based on the agreement concluded in advance.

Domestic waste is gathered in special containers on the territory of the facility and is disposed by the municipal cleaning company under the schedule envisaged by the relevant agreement.

The personnel (drivers and workers) engaged in the waste transportation must be trained. The following types of risks are associated with the transportation of waste:

- Car accidents;
- Scattering or spill of waste;
- Undue loading of the vehicle.

In order to avoid the above-listed risks, it is necessary:

1. To check if the vehicle operates trouble-free and observe the speed limits;
2. To check how hermetically the containers are closed;
3. To consider the carriage capacity of the vehicles when loading them to avoid vehicle overloading;
4. To place a liquid-impermeable membrane on the vehicle body to maintain the waste on the vehicle body in case of emergency spills or scattering.

Despite the safety measures listed above, if the environmental pollution occurs as a result of an accident, the driver must contact the management of the facility, which must take relevant measures envisaged by the ERP by the emergency response team.

Monitoring of waste management:

During the collection, transportation, utilization, neutralization and disposal of waste effective environmental, sanitary-epidemiological and safety standards must be observed.

The registration of waste origination, neutralization and disposal is provided in a special log. The volume of the disposed or utilized waste must be confirmed in writing.

The entity responsible for waste management is obliged to regularly control the following issues:

- Suitability of the tare consequently collect the waste in it.
- Labeling on the tare;
- State of the temporary storage grounds for waste;
- Amount of accumulated waste and compliance with the standards (visual control);
- Observing the regularity of waste disposal from the territory;
- Observing the requirements of environmental safety and safety techniques.

See the information about the monitoring of the waste originated in the facility operation phase in the table above.

The management of the waste originated at the object (classification, inventory, segregation, collection, storage, handing over, transportation and monitoring) will be done in line with the principles and procedures given above.

13.7 Annex 7. Emergency Response Plan

Goals and Objectives of the Plan

Goal of the emergency response plan is to determine and establish guidelines for workers employed for the road construction works in order to ensure rational and coordinated actions of personal during technogenic accidents or incidents, as well as protection of personnel, population and environment.

Objectives of this plan are:

- Determination of possible emergency situations during the road construction;
- Determination of groups responsible for response to each type of emergency situation, their equipment, emergency action plans and responsibilities;
- Determination of internal and external alarm systems;
- Immediate activation of internal resources and, if necessary, mobilization of additional resources and relevant procedures;
- Provision of emergency management system;
- Ensure compliance with legislative, regulatory and safety requirements during emergency situations.

Expected emergency response plan envisages the requirements of Georgian laws and legislative acts.

Types of Emergency Situations

Considering specificities of planned activities, following types of emergency situations are expected:

- Traffic accidents;
- Accidental spills of pollutants;
- Fire;
- Personnel traumatism and incidents related to their health safety.

It is noteworthy, that emergency situations, listed above, may be subsequent and development of one emergency situation may initialize another one.

Traffic Accidents

Trucks and heavy machinery will be used during construction works. During their movement on public and access roads, following are expected:

- Collision with transport means, real estate or livestock of local population;
- Collision with local population;
- Collision with project personnel;
- Collision with other project machinery;
- Collision with local infrastructure facilities;

High risk of traffic accidents will be related to relatively intensified traffic. A number of preventive measures should be taken in order to minimize the risks of traffic accidents, including: limitation of traffic speed, arrangement of warning signs, selection of optimal routes for vehicles, regulation of traffic by standard-bearer, etc.

Machinery must be accompanied with specially equipped techniques and trained personnel; this will dramatically reduce risks of collisions or digress from the road.

Accidental Spills of Pollutants

Oil spill risk may be related to a violation of the conditions of their storage, fuel or oil leakage from vehicles and equipment and so forth.

Fire

The main factor of accident may be anthropogenic, namely: indifference of personnel and violation of safety norms, violation of storage rules for fuels, oils and other explosive substances and etc. in order to prevent fire eruption, strict supervision over fuel and lubricants storage rules, provision of fire fighting means on the construction site, periodic training of personnel on fire prevention and elimination of its consequences will be required.

Personnel Traumatism

Except incidents related to other emergency situations, personnel traumatism may also be related to:

- Incidents related to heavy machinery/equipment used for project implementation;
- Fall from large heights;
- Poisoning with used chemical substances;
- Electric shock, during working near aggregates under high voltage.

General Preventive Measures

Preventive measures for traffic accidents:

- Selection of optimal transport movement routes and speed restrictions;
- Installation of warning, prohibiting and pointing road signs at access roads and construction camps;
- During movement of special and oversized machinery they should be escorted by specially equipped machinery and trained experienced personnel.

Preventive measures for hazardous substance spill:

- Strict supervision over implementation of fuel and chemicals' storage and use terms. Fitness of storage vessel must be checked before storing;
- The technical functionality of oil containing equipment should be periodically monitored;
- Termination of works / suspension of equipment and machinery operation and implementation of maintenance work after detection of minor spill, so that incident would not become large-scale.

Preventive measures for fire/explosion:

- Periodical training and testing of personnel on fire prevention issues;
- Storage of easily flammable and explosive substances at safe places. Installation of corresponding warning signs at their warehouses;
- Implementation of fire safety rules and arrangement of functional fire fighting equipment at the territory;

Preventive measures for personnel traumatism/injury:

- Periodical training and testing of personnel on labour safety issues;
- Provision of personnel with individual protection means;
- Warning signs should be arranged within the dangerous zones;
- Preparation of special staff, which will control implementation of safety norms at construction sites and will register facts of violation

Approximate Scale of Accidents

By considering the expected emergencies, incidents, liquidation resources and legislative requirements, accidents and emergency situations are sorted in 3 levels of response. Table 1. provides description of emergency situations according to their levels, indicating relevant responses.

Table 13.7.1. Description of Different-Level Emergencies

Accidents	Level		
	I Level	II Level	III Level
General	The internal resources are sufficient for emergency liquidation	External resources and workforce are needed for emergency liquidation	Involvement of regional and country resources for emergency liquidation
Road accidents	The damage of equipment, vehicles, infrastructure and non-valuable items takes place. Human health is not in danger.	The damage of the equipment, vehicles, infrastructure and valuable objects takes place. There is the threat to human health	The damage of the equipment, vehicles, infrastructure and valuable objects takes place. There is the high risk of development of other emergencies.
Hazardous substance spillage	Local spillage, which does not need external interference and can be eliminated with internal resources. The risks of spreading of the substance on large areas do not exist.	Large spills (spills of hazardous substances 0.3 tons to 200 tons). There are risk of substance spreading in the area and the risk of the river pollution.	Large spills (more than 200 tons) does not expected
Fire	Local fire, which does not need any external interference and is easily controlled. The meteorological conditions are not conducive to the rapid spread of the fire. There are no inflammable and explosive sections/ warehouses and materials.	Large fires, which spread quickly due to the weather conditions. There are inflammable/explosive areas/ warehouses and materials. It is necessary to call the local fire squad.	A large fire, which spread rapidly. The ignition risk of surrounding neighbourhoods and provocation of other emergencies is high. The approach to the territory is complicated. The inclusion of the regional fire service for the liquidation of the incident is necessary.
Personnel injury / Traumatism	<ul style="list-style-type: none"> • One incident of traumatism; • • One incident of traumatism; • Light fracture, bruises; • I degree burns (skin surface layer damage); <p>Assistance to injured personnel and the liquidation of the incident is possible by local medical service.</p>	<ul style="list-style-type: none"> • Individual cases of accidents; • Severe fracture - a fracture of the joints of the middle; • II degree burns (deep layer of the skin lesions); <p>There is the need to move injured personnel to the local medical facility.</p>	<ul style="list-style-type: none"> • Several traumatic accidents; • Severe fracture - Articular fracture etc.; • III and IV degree burns (skin, hypodermic tissues and muscle lesions); <p>There is the need to move injured personnel to the regional or Tbilisi medical service centres with relevant profile.</p>

Emergency Response

The plan identifies authorized and responsible persons for emergency response, as well as power delegation and granting methods. After arrangement of the area responsible persons and their position must be established; this is considered by the operation sequence plan. This information must be provided to the management of the construction contractor.

During the accident of road transport, it is necessary to implement the following strategic actions:

- A unit whose task and objective will be defined beforehand must be established in case of emergency;
- Objectives for firefighting operations must be established beforehand. Monitoring of the measures conducted must be carried out weekly;
- Procedures to be carried out during emergency and people responsible for them must be also determined;
- Measures to avoid environmental pollution in case of accidental spill of oil products and other substances must be defined. Hazardous materials must be recorded and this information must be available for every staff member.

Response During Traffic Accidents

During the accident of road transport, it is necessary to implement the following strategic actions:

- To stop vehicles/equipment;
- Transmission of information in accordance with the emergency report scheme;
- In case if there is no danger for human health and there are no risks of provoking other emergency situations (for example: collision of other vehicles, explosion, fire, oil spill, hydrodynamic accident or others), then:
 - Get out of the vehicle/equipment or get away from the accident place and stand on a safe distance;
 - Wait for the police/rescue team to come.
- In case of further threats, act as follows:
 - Get out of the vehicle/equipment or get away from the accident place and stand on a safe distance;
 - If the vehicle accident has occurred on the dangerous section of the road of public use (for example: in the turning, there visual field on the road is limited), then ask to the accident witness to stop the cars moving in direction of an accident location;
 - If you are alone on the accident place, place the warning signs or sharp colour safe signs on the road away from the place of an accident, so that those signs will be visible for the drivers moving in direction of an accident place and will ensure the car stop;
 - In case of explosion, fire, oil spill, hydraulic accident and others, ac in accordance with the strategy given in the relevant paragraphs;
 - In case if there is a threat on the health of a person, do not try to move the body;
 - If the injured person is lying in the middle of the street, cover him with something and confine the accident location, so that it will be seen from a distance;
 - Remove everything from him, which might be making asphyxia (belt, scarf);

- First aid to the injured in accordance with the first aid strategy given in the relevant paragraphs (but remember, by extra movement of the injured person, you might create additional risks to his health).

Response During Fire

The strategic actions of the person and the personnel working in the vicinity, who detected fire or smoke, are as follows:

- Termination of works on every site, except for safety measures;
- Assessment of the situation, reconnaissance of fire hearth and adjacent territories;
- Withdrawal of the equipment-devices from the areas, where the fire spreading is possible;
- Electrical equipment should be turned out from the circuit;
- In case if fire is strong and it is hard to approach the fire hearth, some kind of fire or explosive hazardous sites/substances are located adjacently, then:
 - Get away from the danger zone;
 - Inform senior manager/operator about the accident;
 - Wait for rescue team and when they appear, inform them about the fire reasons and the situation in the vicinity of fire hearth;
- In case if the fire is not strong, the fire hearth is easily approachable and getting near to it is not dangerous for your health. At the same time, there are certain risks of fire distribution on adjacent territories, then, act as follows:
 - Inform senior manager/operator about the accident;
 - Search for the nearest fire stand and supply yourself with necessary fire inventory (fire extinguisher, axe, crowbar, bucket and etc.);
 - Try to liquidate fire hearth with fire extinguisher, in accordance with the instruction shown on the fire extinguisher;
 - In case if there is no fire stand on the site, use sand or water for fire hearth liquidation or cover it with less flammable thick cloth;
 - In case if the electrical equipment turned into the circuit are near the fire hearth, it is prohibited to use water;
 - In case of fire in the closed space, do not window the room (except for special needs), because the fresh air supports fire and fire scale growth.

Strategic actions of site manager/chief operator in case of fire:

- Gathering detailed information on fire hearth location, existing/stored devices-equipment in the vicinity and substances;
- Information transfer in accordance with the notification scheme;
- Visiting the accident place and reconnaissance of the situation, risks analysis and assessment of expected fire scales (I, II or III scale);
- Ask whole personnel to use vehicles and fire extinguishing equipment;
- Controlling and managing the personnel actions.
- Support of fire-fighting team actions (need of certain equipment may occur);
- Implementation of liquidation measures after the end of the accident –monitoring of the burnt-down territory to identify any remained fire hearths;
- Preparation of a report and submission to the Construction Contractor’s management.

Response during Accidents Related to Human Injuries and Incidents Related to Their Health and Safety

The person, who is taking care of injured person, must notify ambulance about an accident as a first action. Before the rescue will appear, injured person must receive first aid service in accordance with the tactics given below in following chapters. Before carrying out medical service, it is necessary to assess the situation and determine if approaching and helping an injured person might create some threat.

Open bone fractures

- Promptly call helper, so that helper will immobilize the damaged area of the injured person, while you will process the wound;
- Cover the wound with clean cloth and directly press on it to stop the bleeding. Do not press directly on broken bone fragments;
- Without touching the wound with fingers, surround the damaged area with a clean cloth and fix it;
- If the broken bone fragment is seen in the wound, place the soft cloth around the bone fragment in such way, that the cloth will not be removed and the bandage would not impact on bone fragments. Fix the bandage in such way, that it will not disrupt the blood circulation below the wrapped place;
- Carry out a broken bone immobilization, in the same way as during covered fracture;
- Check pulse, capillary filling and sensitivity below the wrapped place once in every 10 minutes.

Closed bone fracture

- Ask injured person to stay still and fix the damaged part of the fracture above and below it by hand, before it will be immobilized (fixed);
- For a good fixation, fix the injured part of the body on uninjured part. If the fracture is on the hand, fix it on the body with triangle bandage. If the fracture is on the leg, fix the damaged leg on another leg;
- Check pulse, sensitivity and capillary filling below the wrapped place once in every 10 minutes. If the blood circulation or sensitivity is reduced, make a less tight bandage.

There are three types of bleeding:

- There is a little blood. In this case is risk of infection:
 - Clean the wound of injured person with any colourless liquid suitable for drinking;
 - Wrap the wound with clean cloth.
- There is a lot of blood. In this case there is a risk of blood loss:
 - Cover the wound with several layers of cloth and make press bandage;
 - If the blood is still leaking, tight the cloth to the wound again (do not take of the blood-drenched cloth) and strongly press on blood source area.
- The blood is pouring like a fountain from the wound. In this case the blood loss is very fast. In this case you must push finger (or fingers) on the artery projection area to avoid this and then put a bandage.

The areas of load on the artery are: the lower third of an arm and upper third of the thigh. The bandage should be fixed like this:

- The bandage is fixed only in extreme case, because often it leads to irreversible damage;
- The bandage is fixed above wound;
- The location where the bandage will be fixed must be covered with cloths. If the wound area is bare, we should place clean cloth under the bandage;

- First bandage must be tight (fixed as possible), then the bandage is getting tight and in addition placed 3-4 times (rope, belt and etc. can be used instead of bandage);
- The bandage should be fixed for 1 hour in the winter and for 2 hours in summer. Then we should release and after 5-10 minutes fix it slightly above from the original location;
- Check if the bandage is properly fixed – if it is properly fixed, there should be no pulse on limb;
- What we should not do;
- Do not put a hand in the wound;
- Do not take anything from the wound. If some foreign body is seen in the wound, we should try to maximally fix it (put a bandage around this body).
- Internal bleeding is hardly determinable damage. Suspect internal bleeding, when the shock signs are observed after getting injured, but there is no significant blood loss. In case of internal bleeding:
 - Lay injured person on his back and rise his legs up;
 - Remind tight clothes on neck, chest, waist;
 - Do not give food, medicine or drinks to injured person. If injured person is conscious and is very thirsty, just wet his lips;
 - Warm injured person – cover with blanket or cloth;
 - Check the pulse in every 10 minutes, as well as breathing and consciousness. If the person is losing mind, place him in safe location.

First Aid in Case of Burn:

The burn might be developed by hot objects and steam impact (thermal burn), by chemical substances impact on the skin (chemical burn), electricity impact (electrical burn). In order to properly carry out first aid, you must determine the degree of burn, which depends on damage depth and damage area (on what part is the burn distributed).

- The first aid measures during the burn are:
 - It is dangerous to breath in the smoke, so if there is a smoke in the room and it is not available to window fast, remove the injured person on a safe place, on a fresh air;
 - If the clothes are burning on the person, do not start to roll his body, pour the water on the body (in case of electrical burning, usage of water next to the equipment in the circuit, is prohibited);
 - If there is no possibility to use water, cover the body with non-synthetic cloth;
 - It is necessary to start cooling the burnt area in time with cold water (in case of I and II scale burn, water it for 10-15 minutes, in case of III and IV scale burn wrap it with clean wet cloth and then cool it in the water in such wrapped conditions);
 - Remove the cloth and other objects, from the damaged area, which may interrupt blood flow. Do not remove cloth pieces, which are stick to the damaged area;
 - Cover the damaged area with sterile wrapping. This would reduce the likelihood of infection;
 - Breathing in a hot air is possible when burnt, which leads to the burning of respiratory tracts. If the victim has hard noisy breathing, facial or neck burn, singed hair cover of face and nose, swelled mouth and lips, swallowing difficulty, cough, hoarseness voice – suspect the respiratory tracts burn and wait for the medical service;

- Constantly check breathing and pulse before the medical service will come, be ready to carry out reanimation measures;
- It is not allowed to take off the clothes particles from the burnt skin, cause this may lead to the deepening of the damage;
- It is not allowed to destroy the integrity of blebs, because the skin cover is damaged and it makes a favourable conditions for the invasion of infection in the body;
- Do not use ointments, lotions or oils for processing the damaged parts;
- It is prohibited to process the chemical burn areas with neutralizing solutions/ For example, alkaline caused burn treatment with acid.

First Aid in Case of Electrical Trauma

There are three types of electrical trauma:

- The trauma caused by high-voltage electricity. The damage developed as a result of high voltage traumas, are fatal in most cases. Severe burns are being developed at this time. Due to the strong muscle compression the injured person is often threw away on a significant distance, which leads to serious injuries. In case of high-voltage power trauma:
 - It is prohibited to get close to the injured person, before the electricity will be turned off and if necessary, the isolation will be made. Remain 18 m radius safe distance. Do not let other witnesses to approach the injured person;
 - After receiving electric trauma, as soon as approaching the injured person, open the breathing ways without moving head back, by moving the lower jaw in front;
 - Check breathing and circulation signs. Be prepared to make reanimation measures;
 - If the injured person is unconscious but is breathing, place him in a safe location;
 - Carry out first aid in case of burns and other injuries.
- The electrical trauma caused by low-voltage electricity. Low-voltage electricity trauma may turn into serious damages and even death reason. Often, this kind of electrical trauma is caused by damaged plugs, wiring and equipment. When standing on a wet floor or touching undamaged electrical wiring with wet hands, the risks of getting the electrical trauma are sharply increasing. In case of low-voltage power caused trauma:
 - Do not touch the injured person, if he is touching the power source;
 - Do not use metal object for removing the power source;
 - If you are able, stop power supply (turn off the power switch). If it is not available, turn off the electrical equipment from the power source;
 - If you are not able to switch off the electricity, then stand on dry insulation thing (for example: a plank of wood, on rubber or plastic pad, on book or pile of newspapers);
 - Remove the victim's body from the power source by broom, stick, and chair. You can move the victim's body away from the power source, or vice versa, the power source away from the body, if it is more convenient;
 - Without touching the body of injured person, tie a rope around his foot and shoulders and move away from the power source;
 - At least, grab the injured person in dry not-tight cloth and move him away from the power source;
 - If the victim is unconscious, open the airways, check the breathing and pulse;

- If the victim is unconscious, is breathing and has a pulse, place in a safe location. Cool the burned areas and wrap it;
- If the visible injuries are not seen on the victim and feels good, advice to take a rest.
- The electrical trauma caused by lightning/thunder:
 - Various traumas, burns, face and eyes damage is often by the electrical trauma. Sometimes the lightning may cause a sudden death.

Quickly move damaged person from the place of the accident and serve with first aid as in case of different type of the electrical trauma.

Equipment Necessary for Emergency Response

Personal protection means are:

- Helmets;
- Safety glasses;
- Uniforms with reflective stripes;
- Waterproof boots;
- Gloves.

Fire extinguishing equipment:

- Standard fire extinguisher: on every site, as well as on every special machines and equipment;
- Buckets, sand, shovels and etc.;
- Properly equipped fire stands;
- Fire truck – the nearest fire fighters team truck will be used.

Emergency medical service equipment:

- Standard medical boxes: Standard medical boxes for vehicles: on every project vehicle and equipment;
- Ambulance car

Spill response equipment:

- Heavy duty plastic bags;
- Absorbent pads;
- Gloves;
- Drip trays;
- Buckets;
- Polyethylene film.

Emergency response equipment

The following emergency response equipment must be available on the construction base:

Personal protection means are:

- Helmets;
- Safety glasses;
- Uniforms with reflective stripes;
- Waterproof boots;
- Gloves.

Fire extinguishing equipment:

- Standard fire extinguisher: on every site, as well as on every special machines and equipment;

- Buckets, sand, shovels and etc.;
- Properly equipped fire stands;
- Fire truck – the nearest fire fighters team truck will be used.

Emergency medical service equipment:

- Standard medical boxes: Standard medical boxes for vehicles: on every project vehicle and equipment;
- Ambulance car

Spill response equipment:

- Heavy duty plastic bags;
- Absorbent pads;
- Gloves;
- Drip trays;
- Buckets;
- Polyethylene film.

Necessary Qualification and Personnel Training

Testing of each system of emergency response must be periodically implemented, obtained experience must be documented and weak spots should be improved (the same should take place in case of accident realization).

The whole staff, employed on treatment facility construction and operation, must undergo introductory training, which includes emergency response course. Personnel additional training registration system should exist and be kept at offices of customer or contractors.

13.8 Appendix 7 Results of Noise Modeling: Existing, Construction and Operation Stages (2020 and 2025)

Structure for each settlement	
1	Picture of the village
2	Numbering of houses
3	Table of noise level excess
4	Information about barriers
5	Fully table of results

1. Kirikhlo

Picture of the village



Numbering of houses



Table of noise level excess

Table of excess				
Kirikhlo				
	Without Mitigation			
	Presently		2025	
	Day	Night	Day	Night
Sum of excess (number of Building)	0	0	0	0

Fully table of results

Kirikhlo					
Building N	Construction	No Mitigation			
		After it is built		2025	
		2020	Day	Night	Day
1	38.3	40.3	34.8	42.3	36.8
2	38.9	39.4	33.8	41.5	35.8
3	38.4	40.4	34.8	42.4	36.8
4	39.9	40.4	34.7	42.5	36.7
5	38.7	39.4	33.8	41.5	35.7
6	38.9	39.4	33.7	41.4	35.7
7	38.4	39.1	33.5	41.1	35.4

8	38.7	39.4	33.8	41.5	35.8
9	38.3	40.4	34.7	42.4	36.7
10	40.7	41.1	35.5	43.2	37.5
11	40.2	40.6	35.0	42.6	37.0
12	40.5	41.2	35.6	43.3	37.6
13	41.3	42.7	36.9	44.8	38.9
14	42.1	43.1	37.3	45.2	39.3
15	41.8	43.2	37.3	45.2	39.3
16	40.0	43.3	37.3	45.4	39.3
17 school	45.7	46.4	39.9	48.4	41.9
18	43.3	43.1	37.2	45.1	39.2
19	44.9	44.2	38.4	46.2	40.4
20	45.0	44.4	38.6	46.4	40.5
21	46.3	44.2	38.5	46.3	40.5
22	44.7	43.6	37.9	45.7	39.9
23	43.7	42.3	36.6	44.4	38.6
24	43.6	41.5	35.8	43.6	37.8
25	42.6	42.4	36.8	44.5	38.8
26	42.2	41.8	36.1	43.8	38.0
27	42.0	41.0	35.4	43.1	37.4

2. Akhali Mamudlo



Numbering of houses



Table of noise level excess

Table of excess				
Akhali mamudlo				
	Without Mitigation			
	Presently		2025	
	Day	Night	Day	Night
Sum of excess (number of Building)	0	0	0	0

Fully table of results


Akhali mamudlo					
		No Mitigation			
Building N	Construction	After it is built		2025	
	2020	Day	Night	Day	Night
29	47.0	39.8	38.0	45.7	40.0

30	48.5	40.0	38.1	45.8	40.1
31	48.8	41.1	39.2	46.9	41.2
32	49.0	40.9	39.0	46.7	41.0
33	48.3	39.7	37.7	45.5	39.7
34	47.6	39.5	37.5	45.3	39.5
35	47.0	39.7	37.9	45.6	39.9
36	47.7	40.1	38.2	45.9	40.2
37	48.8	39.7	37.8	45.6	39.8
38	50.7	42.2	40.3	48.0	42.3
40	50.3	44.0	42.0	49.8	44.0
41	47.8	42.2	40.5	48.0	42.5
42	45.6	42.3	40.7	48.1	42.6
43	46.5	41.6	40.0	47.4	42.0
44	49.9	42.0	40.2	47.9	42.2
45	48.8	42.5	40.7	48.3	42.7
46	48.0	40.2	38.5	46.0	40.4
47	47.7	42.5	40.8	48.3	42.8
48	49.2	44.1	42.3	49.9	44.3
49	49.6	43.0	41.3	48.9	43.2
50	50.6	44.1	42.3	50.0	44.3
51	51.0	45.0	42.9	50.8	44.9
52	45.2	41.5	39.9	47.3	41.9
53	47.8	40.9	39.2	46.7	41.2
54	47.6	40.9	39.2	46.7	41.2
55	46.8	41.0	39.3	46.8	41.3
56	47.4	40.3	38.5	46.1	40.4
58	46.8	40.3	38.5	46.1	40.5
59	46.7	40.2	38.4	46.0	40.4
60	44.2	39.2	37.5	45.1	39.4

	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night
Sum of excess (number of Building)	3	23	13	24	0	0	0	2	0	0	0	0

Information about barriers

Barriers		
Wall N	Length (m.)	High (m.)
1	400	4

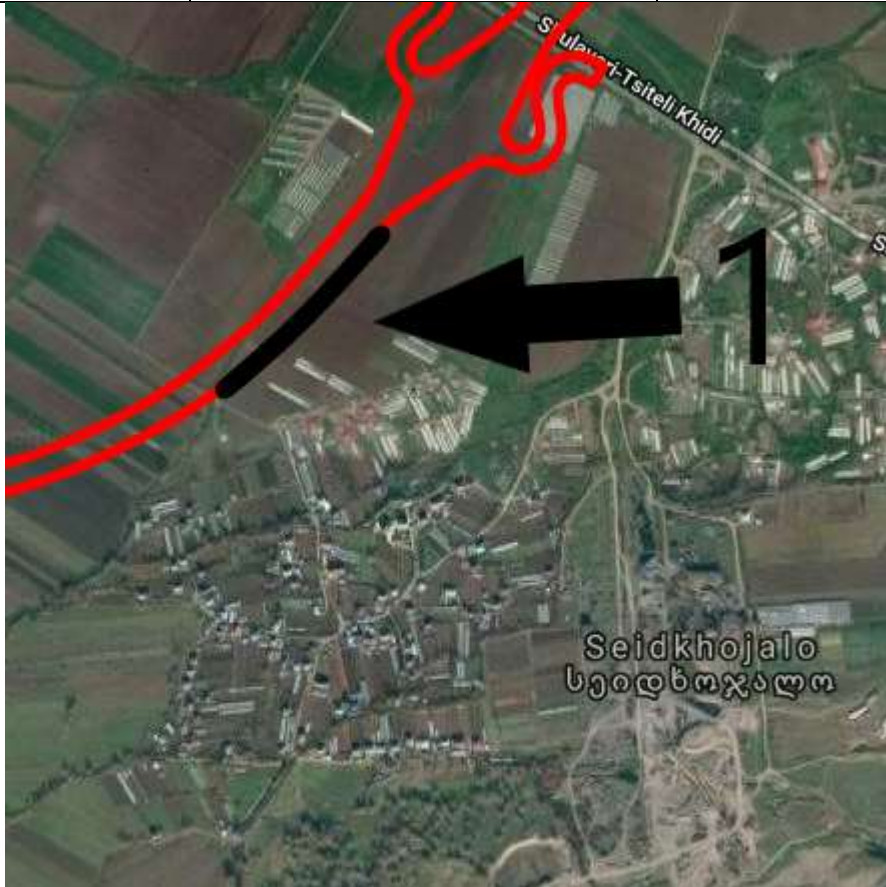

Fully table of results

		Seidkhojalo															
Building N	Constru ction	No Mitigation				Wall Barriers				Porous surface				Wall barrier and 100 km/h			
		After it is built		2025		After it is built		2025		After it is built		2025		After it is built		2025	
		Day	Nigh	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night
61	54.4	52.2	46.0	54.2	47.9	50.0	43.6	52.1	45.6	49.2	43.0	51.2	44.9	49.4	42.9	51.4	44.9
62	55.8	53.6	47.5	55.7	49.5	50.7	44.2	52.8	46.2	50.6	44.5	52.7	46.5	50.1	43.6	52.1	45.6
63	54.0	53.2	47.3	53.3	47.5	50.0	43.7	52.1	45.7	50.2	44.3	50.3	44.5	47.7	41.9	49.7	43.9

64	56.1	53.1	47.4	55.3	49.3	49.9	43.8	51.9	45.7	50.1	44.4	52.3	46.3	49.3	43.0	51.4	45.0
65	56.9	51.2	45.5	55.2	49.3	48.4	42.6	50.4	44.5	48.2	42.5	52.2	46.3	49.2	43.1	51.2	45.1
66	53.8	51.5	45.8	53.6	47.7	48.5	42.5	50.5	44.5	48.5	42.8	50.6	44.7	47.8	41.8	49.8	43.8
67	54.6	51.8	46.0	53.8	48.0	48.2	42.4	50.3	44.4	48.8	43.0	50.8	45.0	47.6	41.7	49.6	43.7
68	57.6	52.2	46.6	54.3	48.5	47.9	41.9	49.9	43.9	49.2	43.6	51.3	45.5	47.2	41.2	49.2	43.2
69	57.6	51.8	46.1	53.8	48.1	46.8	40.8	48.8	42.8	48.8	43.1	50.8	45.1	46.1	40.1	48.2	42.1
70	55.5	51.2	45.5	53.3	47.4	48.1	42.2	50.1	44.2	48.2	42.5	50.3	44.4	47.4	41.5	49.5	43.5
71	56.1	51.6	45.9	53.6	47.9	47.3	41.6	49.4	43.6	48.6	42.9	50.6	44.9	46.7	41.0	48.7	42.9
72	56.6	50.6	44.8	52.6	46.8	46.8	41.1	48.9	43.1	47.6	41.8	49.6	43.8	46.1	40.5	48.2	42.4
73	58.9	53.2	47.4	55.2	49.3	47.6	41.5	49.6	43.4	50.2	44.4	52.2	46.3	46.9	40.8	48.9	42.8
74	57.3	52.5	46.8	54.5	48.8	47.6	41.5	49.6	43.5	49.5	43.8	51.5	45.8	46.9	40.8	49.0	42.8
75	56.9	52.2	46.4	54.3	48.3	47.1	41.0	49.1	43.0	49.2	43.4	51.3	45.3	46.4	40.3	48.5	42.3
76	61.0	54.7	48.8	56.7	50.7	47.6	41.4	49.7	43.4	51.7	45.8	53.7	47.7	46.9	40.7	49.0	42.7
77	62.4	53.6	47.7	57.9	51.9	46.8	40.7	48.9	42.7	50.6	44.7	54.9	48.9	46.6	40.1	48.7	42.0
78	58.9	55.8	49.9	55.7	49.7	47.3	40.7	49.4	42.7	52.8	46.9	52.7	46.7	46.2	40.1	48.2	42.0
79	64.3	58.5	52.3	60.5	54.3	49.9	43.4	51.9	45.3	55.5	49.3	57.5	51.3	49.2	42.7	51.2	44.7
80	58.7	54.4	48.3	56.4	50.2	47.7	41.4	49.8	43.3	51.4	45.3	53.4	47.2	47.1	40.7	49.1	42.7
81	57.7	53.7	47.7	55.7	49.6	46.8	40.6	48.9	42.6	50.7	44.7	52.7	46.6	46.2	39.9	48.2	41.9
82	59.2	55.3	48.9	57.3	50.9	49.3	42.9	51.4	44.9	52.3	45.9	54.3	47.9	48.7	42.3	50.7	44.3
83	59.0	53.3	47.1	57.0	50.6	47.1	41.2	49.2	43.1	50.3	44.1	54.0	47.6	46.5	40.5	48.5	42.5
84	58.2	55.0	48.6	55.4	49.1	50.3	44.0	52.4	46.0	52.0	45.6	52.4	46.1	49.6	43.3	51.7	45.0


4. Kvemo sarali



	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night
Sum of excess (number of Building)	2	6	2	25	0	0	0	3	0	0	0	1

Information about barriers


Barriers		
Wall N	Length (m.)	High (m.)
1	500	4



Kvemo sarali																	
Building N	Constructi on	No Mitigation				Wall Barriers				Porous surface				Wall barrier and 100 km/h			
		After it is built		2025		After it is built		2025		After it is built		2025		After it is built		2025	
		2020	Day	Nigh	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day
85	50.6	46.1	40.2	48.2	42.2	45.4	39.7	47.5	41.7	43.1	37.2	45.2	39.2	44.8	39.0	46.9	41.0

86	55.0	50.5	44.5	52.6	46.5	50.2	44.3	52.3	46.3	47.5	41.5	49.6	43.5	49.5	43.6	51.6	45.6
87	53.3	49.5	43.6	51.6	45.6	49.1	43.2	51.2	45.2	46.5	40.6	48.6	42.6	48.4	42.6	50.5	44.6
88	53.1	49.2	43.2	51.3	45.2	49.0	43.1	51.1	45.0	46.2	40.2	48.3	42.2	48.4	42.5	50.4	44.4
89	52.1	46.2	40.3	48.3	42.3	45.1	39.1	47.2	41.1	43.2	37.3	45.3	39.3	44.5	38.5	46.5	40.4
90	53.2	49.0	43.0	51.1	45.0	48.5	42.6	50.6	44.6	46.0	40.0	48.1	42.0	47.8	41.9	49.9	43.9
91	51.7	49.1	43.4	51.2	45.4	48.7	43.0	50.8	45.0	46.1	40.4	48.2	42.4	48.0	42.3	50.1	44.3
92	51.6	48.0	42.3	50.1	44.3	47.6	41.9	49.7	43.9	45.0	39.3	47.1	41.3	46.9	41.2	49.0	43.2
93	51.2	45.5	39.8	47.6	41.8	45.5	39.8	47.6	41.8	42.5	36.8	44.6	38.8	44.8	39.1	46.9	41.1
94	49.0	43.3	37.6	45.4	39.5	43.0	37.4	45.1	39.4	40.3	34.6	42.4	36.5	42.3	36.7	44.4	38.7
95	49.1	46.2	40.5	48.3	42.5	45.4	39.9	47.5	41.9	43.2	37.5	45.3	39.5	44.8	39.3	46.9	41.2
96	53.3	49.3	43.2	51.4	45.2	48.5	42.5	50.6	44.5	46.3	40.2	48.4	42.2	47.8	41.8	49.9	43.8
97	53.0	50.2	44.0	52.3	46.0	49.3	43.2	51.4	45.2	47.2	41.0	49.3	43.0	48.6	42.6	50.7	44.5
98	53.1	49.9	43.7	52.0	45.7	48.8	42.8	50.9	44.8	46.9	40.7	49.0	42.7	48.1	42.1	50.2	44.1
99	53.3	50.1	43.8	52.2	45.8	48.9	42.8	51.0	44.7	47.1	40.8	49.2	42.8	48.2	42.1	50.3	44.1
100	53.2	50.3	44.1	52.4	46.1	49.1	43.0	51.2	45.0	47.3	41.1	49.4	43.1	48.5	42.3	50.6	44.3
101	52.2	50.1	43.9	52.1	45.9	48.2	42.3	50.3	44.3	47.1	40.9	49.1	42.9	47.5	41.6	49.6	43.6
102	52.2	50.0	43.9	52.1	45.9	47.9	42.1	50.0	44.0	47.0	40.9	49.1	42.9	47.3	41.4	49.4	43.4
103	51.7	49.8	43.9	51.9	45.9	47.0	41.1	49.1	43.1	46.8	40.9	48.9	42.9	46.3	40.5	48.4	42.4
104	51.3	49.9	44.1	51.9	46.1	47.5	41.8	49.6	43.8	46.9	41.1	48.9	43.1	46.8	41.1	48.9	43.1
105	51.6	49.4	43.4	51.5	45.4	47.3	41.2	49.4	43.2	46.4	40.4	48.5	42.4	46.7	40.5	48.8	42.5
106	52.6	51.5	45.3	53.6	47.3	47.6	41.4	49.7	43.4	48.5	42.3	50.6	44.3	46.9	40.8	49.0	42.7
107	54.3	52.9	46.5	55.0	48.5	48.4	42.2	50.5	44.2	49.9	43.5	52.0	45.5	47.8	41.5	49.9	43.5
108	53.4	52.0	45.8	54.1	47.8	46.2	40.2	48.3	42.2	49.0	42.8	51.1	44.8	45.5	39.6	47.6	41.5
109	56.6	55.5	48.8	57.6	50.8	48.0	41.4	50.1	43.4	52.5	45.8	54.6	47.8	47.4	40.7	49.4	42.7
110	56.4	55.7	49.0	57.8	51.0	48.7	42.0	50.8	43.9	52.7	46.0	54.8	48.0	48.1	41.3	50.2	43.3
111	54.2	52.1	45.8	54.2	47.8	47.8	41.3	49.9	43.3	49.1	42.8	51.2	44.8	47.1	40.7	49.2	42.6
112	53.2	50.9	44.6	53.0	46.6	47.2	40.8	49.3	42.8	47.9	41.6	50.0	43.6	46.5	40.1	48.6	42.1
113	53.5	51.0	44.7	53.1	46.7	47.5	41.3	49.6	43.2	48.0	41.7	50.1	43.7	46.8	40.6	48.9	42.6
114	53.1	50.8	44.6	52.9	46.6	47.6	41.5	49.7	43.5	47.8	41.6	49.9	43.6	46.9	40.8	49.0	42.8
115	53.1	50.9	44.8	53.0	46.8	48.3	42.4	50.4	44.3	47.9	41.8	50.0	43.8	47.7	41.7	49.7	43.7
116	51.0	49.1	43.1	51.2	45.1	47.2	41.3	49.3	43.3	46.1	40.1	48.2	42.1	46.5	40.6	48.6	42.6
117	49.7	48.2	42.3	50.3	44.3	46.3	40.5	48.4	42.5	45.2	39.3	47.3	41.3	45.6	39.8	47.7	41.8
118	46.8	46.5	40.7	48.6	42.7	44.8	39.2	46.9	41.1	43.5	37.7	45.6	39.7	44.1	38.5	46.2	40.5

5. Zemo sarali

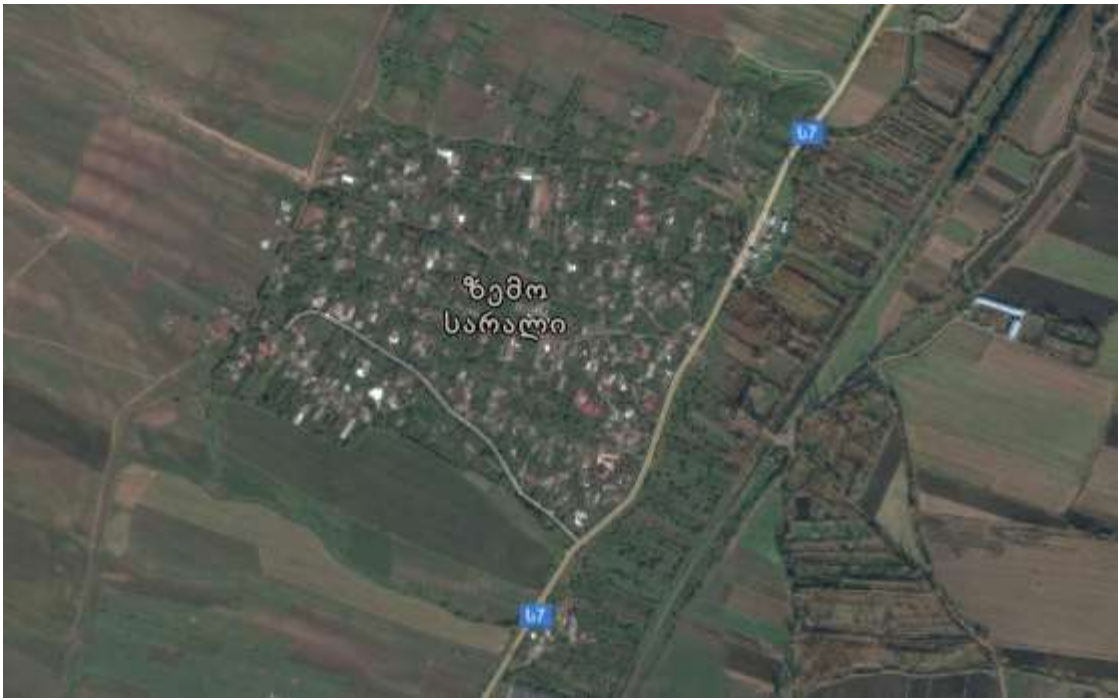

Numbering of houses

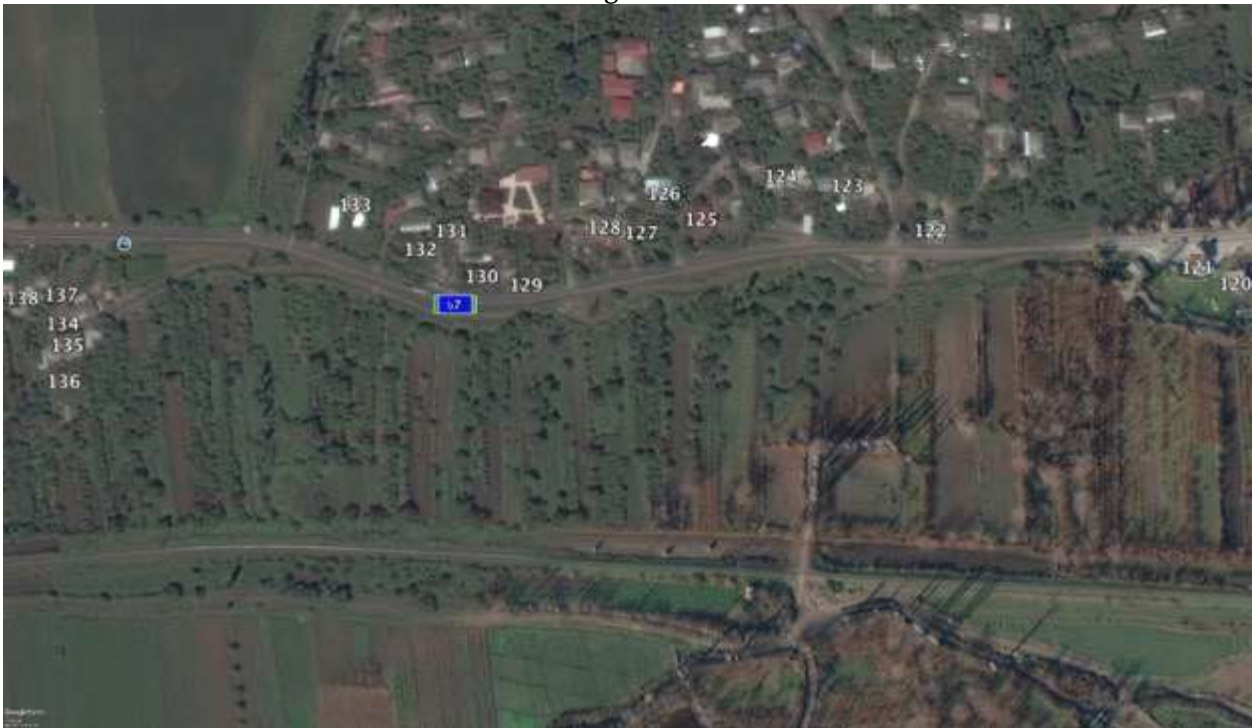


Table of noise level excess

Table of excess						
Zemo sarali						
	Currnet		Without Mitigation			
	Day	Night	Presently		2025	
			Day	Night	Day	Night
Sum of excess (number	18	19	1	1	1	1

of Building)						
-----------------	--	--	--	--	--	--

Fully table of results

Zemo sarali							
Building N				No Mitigation			
	Current		Constru ction	After it is built		2025	
	Day	Night	2025	Day	Nigh	Day	Night
120	65.1	58.2	60.0	55.2	48.9	57.0	50.9
121	70.7	63.4	59.7	54.8	48.5	56.7	50.6
122	70.4	63.1	60.6	56.7	49.6	58.5	51.7
123	62.5	55.8	59.7	55.7	48.7	57.5	50.8
124	61.0	54.6	59.7	56.1	49.0	57.9	51.1
125	64.4	57.9	60.7	57.1	49.9	58.9	52.0
126	59.0	53.0	59.4	55.9	48.8	57.7	50.8
127	63.9	57.0	60.8	57.2	50.1	59.0	52.1
128	57.9	51.3	58.5	54.5	47.8	56.3	49.8
129	67.7	60.6	62.0	56.9	50.1	58.8	52.2
130	69.7	62.4	62.8	58.1	51.0	59.9	53.1
131	58.9	52.7	59.3	55.1	48.3	56.9	50.4
132	65.2	58.3	61.7	57.1	50.1	59.0	52.2
133	61.5	55.5	59.6	55.2	48.3	57.0	50.4
134	61.4	54.9	61.0	55.5	48.9	57.3	50.9
135	56.3	50.0	62.4	57.0	50.1	58.8	52.1
136	53.0	47.3	64.7	59.5	52.4	61.3	54.4
137	64.2	57.6	56.5	50.6	44.7	52.5	46.7
138	63.3	56.8	53.9	48.3	42.3	50.1	44.3

	ly		ly		ly		ly		ly		ly		ly		ly			
	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night		
Sum of excess (number of Building)	9	9	4	4	4	4	1	3	2	3	4	4	4	4	1	2	2	3


Information about barriers

Barriers		
Wall N	Length (m.)	High (m.)
1	300	4
<p>A satellite map showing a barrier (Wall N 1) in a rural area. The barrier is a black vertical line segment. A red double line runs parallel to it. A black arrow labeled '1' points to the barrier. The map includes labels for 'Akhlo Lalalo' (ახლო ლალალო) and 'Platform 2562th km Railway' (პლატფორმა 2562-ე კმ). Road markers for '67' are also visible.</p>		

Fully table of results

Akhlo lalalo																			
			No Mitigation				Wall Barriers				Porous surface				Wall barriers and 100 km/h				
Building N	Current		Construction 2020	After it is built		2025		After it is built		2025		After it is built		2025		After it is built		2025	
	Day	Night		Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night
140	46.7	41.5	62.0	64.4	57.3	66.2	59.4	56.7	49.5	58.5	51.6	61.4	54.3	63.2	56.4	56.0	48.8	57.8	50.9
141	45.7	40.6	58.2	61.7	54.9	63.5	57.0	52.4	45.4	54.2	47.4	58.7	51.9	60.5	54.0	51.7	44.7	53.6	46.8
142	44.9	39.8	55.2	59.6	53.0	61.4	55.0	49.7	42.4	51.6	44.4	56.6	50.0	58.4	52.0	49.1	41.7	50.9	43.7
143	45.6	40.4	59.2	60.4	54.0	62.3	56.1	55.0	48.7	57.0	50.8	57.4	51.0	59.3	53.1	54.5	48.0	56.3	50.1
144	59.8	53.6	57.9	55.2	48.7	57.1	50.7	55.2	48.7	57.1	50.7	52.2	45.7	54.1	47.7	54.6	48.0	56.4	50.1
145	60.6	54.4	52.8	51.9	45.3	53.7	47.4	51.9	45.3	53.7	47.4	48.9	42.3	50.7	44.4	51.2	44.7	53.0	46.7
146	62.1	55.2	53.0	52.1	45.6	53.9	47.7	52.1	45.6	53.9	47.7	49.1	42.6	50.9	44.7	51.4	44.9	53.2	47.0
147	59.8	53.7	52.2	51.6	45.3	53.5	47.4	51.6	45.3	53.5	47.4	48.6	42.3	50.5	44.4	51.0	44.7	52.8	46.7
148	56.2	50.8	51.6	50.7	44.6	52.5	46.6	50.7	44.6	52.5	46.6	47.7	41.6	49.5	43.6	50.0	43.9	51.9	45.9
149	65.4	58.4	53.0	51.7	45.7	53.5	47.8	51.7	45.7	53.5	47.8	48.7	42.7	50.5	44.8	51.0	45.0	52.8	47.1
150	63.0	56.7	50.6	50.0	44.0	51.8	46.0	50.0	44.0	51.8	46.0	47.0	41.0	48.8	43.0	49.3	43.3	51.1	45.4
151	57.2	51.1	51.6	51.0	45.1	52.9	47.1	51.0	45.1	52.9	47.1	48.0	42.1	49.9	44.1	50.4	44.4	52.2	46.5
152	56.9	51.3	51.4	50.9	44.8	52.8	46.8	50.9	44.8	52.8	46.8	47.9	41.8	49.8	43.8	50.3	44.1	52.1	46.1

7. Kirovka

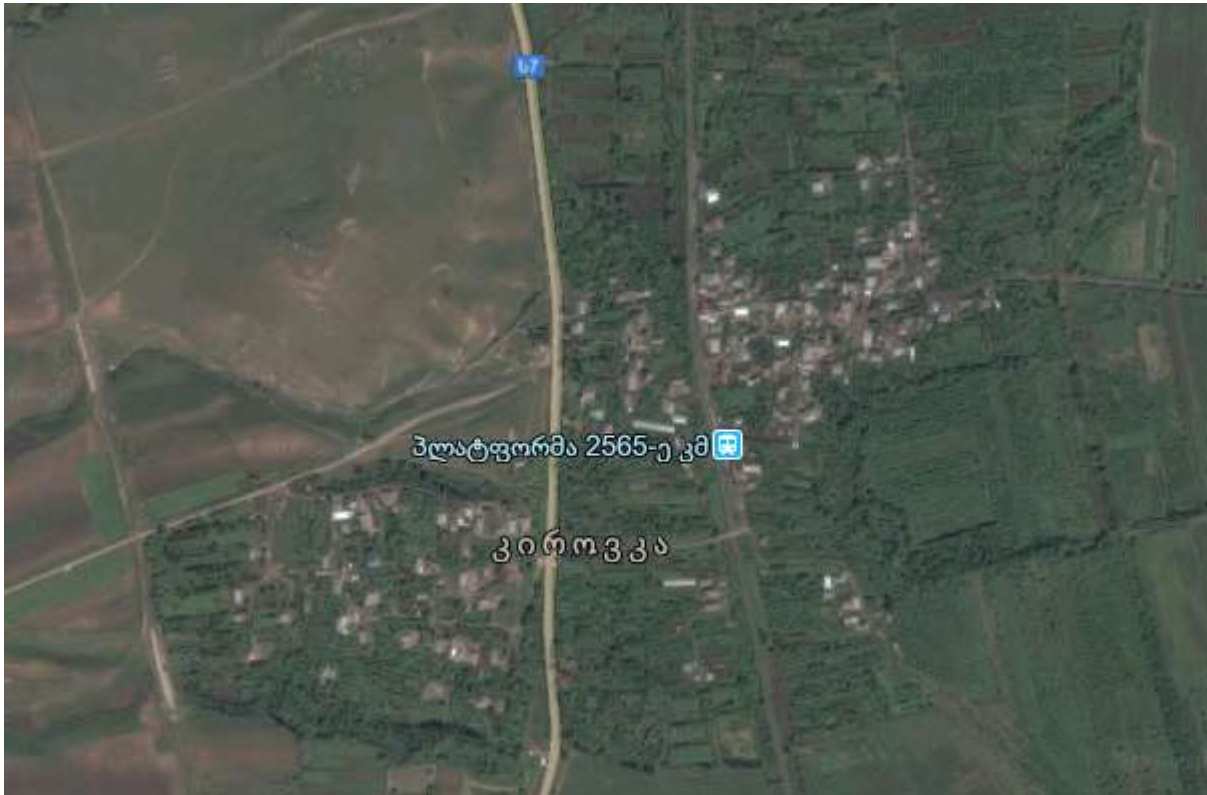

Numbering of houses

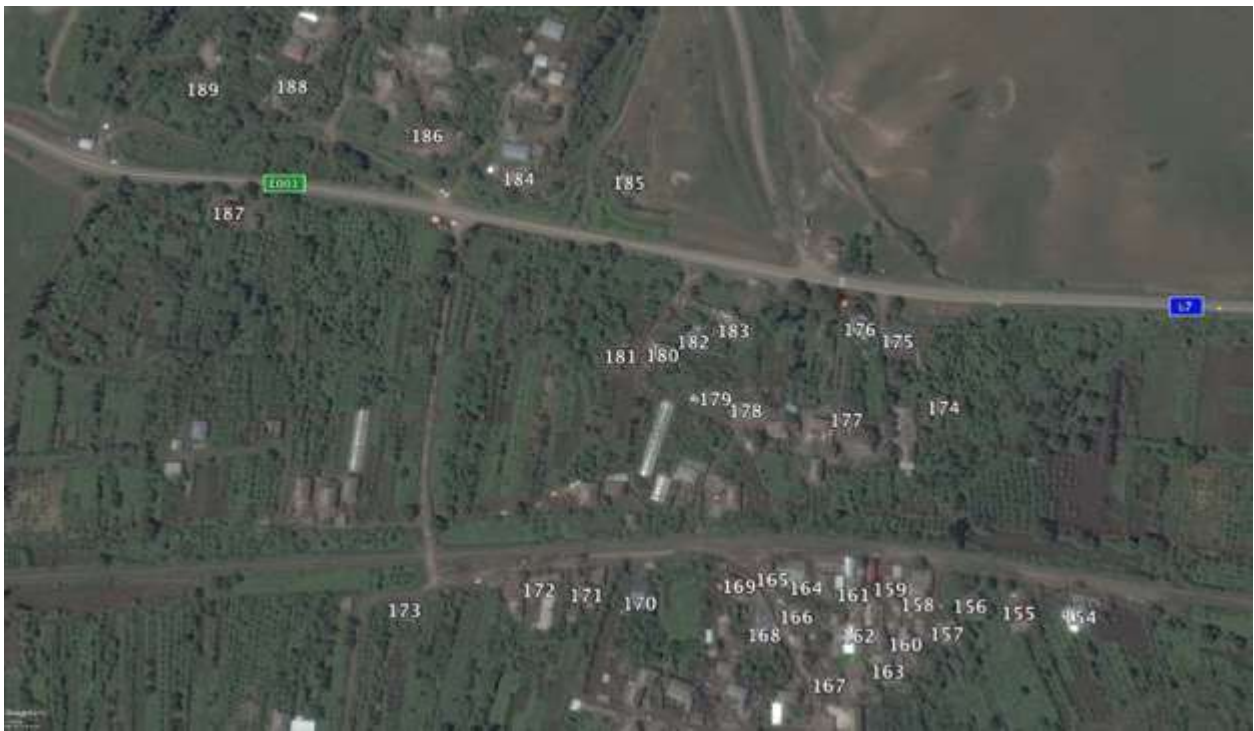


Table of noise level excess

Kirovka																		
	Current		Without Mitigation				With Wall Barriers				Porous surface				Wall barriers and 100 km/h			
			Presently		2025		Presently		2025		Presently		2025		Presently		2025	
	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night
Sum of excess (number of Building)	14	16	21	24	25	25	0	0	0	0	17	24	20	24	0	0	0	0

Information about barriers

Barriers		
Wall N	Length (m.)	High (m.)
1	700	4
2	400	4




Fully table of results

Kirovka																			
			No Mitigation				Wall Barriers				Porous surface				Wall barriers and 100 km/h				
Building N	Current		Construction 2020	After it is built		2025		After it is built		2025		After it is built		2025		After it is built		2025	
	Day	Night		Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night
154	50.7	44.4	66.9	62.8	56.0	64.7	57.8	50.8	43.1	52.6	45.0	59.8	53.0	61.7	54.8	50.1	42.4	52.0	44.3
155	50.4	44.2	66.7	62.7	55.8	64.6	57.7	48.8	40.5	50.7	42.3	59.7	52.8	61.6	54.7	48.1	39.8	50.0	41.7
156	50.2	44.1	66.6	63.1	56.1	64.9	57.9	49.0	40.8	50.9	42.7	60.1	53.1	61.9	54.9	48.3	40.2	50.2	42.0
157	49.2	43.0	63.2	59.8	52.5	61.7	54.4	47.1	39.5	48.9	41.4	56.8	49.5	58.7	51.4	46.4	38.9	48.3	40.7
158	49.7	43.6	66.0	62.7	55.7	64.6	57.6	50.0	42.2	51.9	44.0	59.7	52.7	61.6	54.6	49.3	41.5	51.2	43.4
159	49.6	43.7	65.4	62.8	55.8	64.7	57.7	50.4	42.8	52.2	44.7	59.8	52.8	61.7	54.7	49.7	42.1	51.6	44.0
160	47.9	42.0	60.0	56.7	49.9	58.6	51.8	45.7	38.2	47.6	40.0	53.7	46.9	55.6	48.8	45.1	37.5	46.9	39.4
161	48.6	42.9	65.0	62.1	55.4	64.0	57.3	50.1	42.6	52.0	44.5	59.1	52.4	61.0	54.3	49.4	41.9	51.3	43.8
162	43.6	38.7	58.4	55.8	48.9	57.7	50.8	45.1	38.2	47.0	40.0	52.8	45.9	54.7	47.8	44.5	37.5	46.3	39.4
163	44.9	39.7	55.4	53.2	46.9	55.1	48.8	44.0	37.1	45.9	38.9	50.2	43.9	52.1	45.8	43.3	36.4	45.2	38.3
164	45.8	40.1	60.6	57.9	51.2	59.8	53.1	47.3	40.3	49.1	42.2	54.9	48.2	56.8	50.1	46.6	39.6	48.5	41.5
165	46.4	41.1	64.6	62.0	55.2	63.9	57.1	49.2	41.4	51.1	43.3	59.0	52.2	60.9	54.1	48.5	40.8	50.4	42.6
166	44.9	39.5	56.5	55.0	48.7	56.9	50.6	44.6	37.2	46.4	39.1	52.0	45.7	53.9	47.6	43.9	36.5	45.8	38.4
167	47.0	41.8	57.1	54.5	48.6	56.4	50.5	45.7	39.3	47.6	41.1	51.5	45.6	53.4	47.5	45.0	38.6	46.9	40.5
168	45.5	40.2	59.6	56.6	49.8	58.5	51.7	46.5	39.5	48.3	41.4	53.6	46.8	55.5	48.7	45.8	38.9	47.7	40.7
169	46.7	41.3	64.7	61.1	54.5	63.0	56.4	48.7	41.0	50.6	42.9	58.1	51.5	60.0	53.4	48.1	40.4	49.9	42.2

170	48.0	42.2	64.3	60.6	54.1	62.5	56.0	48.9	41.3	50.8	43.2	57.6	51.1	59.5	53.0	48.3	40.6	50.1	42.5
171	48.0	42.1	65.0	60.1	53.8	61.9	55.7	48.9	41.3	50.8	43.2	57.1	50.8	58.9	52.7	48.3	40.6	50.1	42.5
172	49.1	43.1	66.2	60.1	53.8	62.0	55.7	49.6	41.9	51.4	43.8	57.1	50.8	59.0	52.7	48.9	41.3	50.8	43.1
173	49.4	43.2	65.7	61.1	54.5	63.0	56.3	50.3	43.0	52.2	44.9	58.1	51.5	60.0	53.3	49.7	42.3	51.5	44.2
174	56.2	50.0	68.1	64.6	57.3	66.4	59.2	56.8	49.4	58.7	51.3	61.6	54.3	63.4	56.2	56.1	48.8	58.0	50.6
175	64.2	57.4	63.8	58.5	51.9	60.3	53.8	53.7	46.8	55.6	48.6	55.5	48.9	57.3	50.8	53.1	46.1	54.9	48.0
176	64.9	58.2	63.6	58.3	52.0	60.1	53.8	52.1	45.4	53.9	47.3	55.3	49.0	57.1	50.8	51.4	44.7	53.3	46.6
177	55.2	49.6	70.7	68.9	61.4	70.8	63.3	57.3	50.2	59.2	52.1	65.9	58.4	67.8	60.3	56.7	49.6	58.5	51.4
178	53.1	47.5	70.3	66.5	59.3	68.3	61.2	54.4	46.9	56.2	48.8	63.5	56.3	65.3	58.2	53.7	46.3	55.5	48.1
179	53.8	47.7	69.1	64.7	57.5	66.5	59.3	54.0	46.4	55.8	48.3	61.7	54.5	63.5	56.3	53.3	45.7	55.2	47.6
180	59.3	52.8	66.4	61.0	54.3	62.9	56.2	53.9	46.6	55.7	48.5	58.0	51.3	59.9	53.2	53.2	45.9	55.1	47.8
181	58.8	52.4	66.8	62.8	55.6	64.7	57.5	55.2	47.9	57.1	49.7	59.8	52.6	61.7	54.5	54.6	47.2	56.4	49.1
182	61.1	54.4	61.5	57.4	51.2	59.3	53.0	48.5	41.2	50.3	43.1	54.4	48.2	56.3	50.0	47.8	40.5	49.7	42.4
183	63.3	56.5	61.3	56.3	50.2	58.2	52.1	49.9	43.3	51.8	45.2	53.3	47.2	55.2	49.1	49.2	42.6	51.1	44.5
184	65.0	58.3	59.1	56.9	49.9	58.8	51.8	53.8	46.6	55.7	48.5	53.9	46.9	55.8	48.8	53.1	45.9	55.0	47.8
185	63.4	56.8	58.5	55.9	49.2	57.7	51.0	51.8	44.7	53.7	46.6	52.9	46.2	54.7	48.0	51.2	44.1	53.0	45.9
186	60.8	54.5	57.2	56.4	49.1	58.2	51.0	54.0	46.6	55.9	48.5	53.4	46.1	55.2	48.0	53.3	45.9	55.2	47.8
187	66.2	58.9	58.8	55.8	48.9	57.6	50.7	54.7	47.9	56.6	49.7	52.8	45.9	54.6	47.7	54.1	47.2	55.9	49.1
188	58.7	52.2	55.5	54.1	47.0	55.9	48.9	52.5	45.3	54.3	47.2	51.1	44.0	52.9	45.9	51.8	44.6	53.6	46.5
189	56.4	49.8	54.6	53.4	46.4	55.3	48.2	51.9	44.8	53.8	46.6	50.4	43.4	52.3	45.2	51.2	44.1	53.1	46.0

8. Sadakhlo

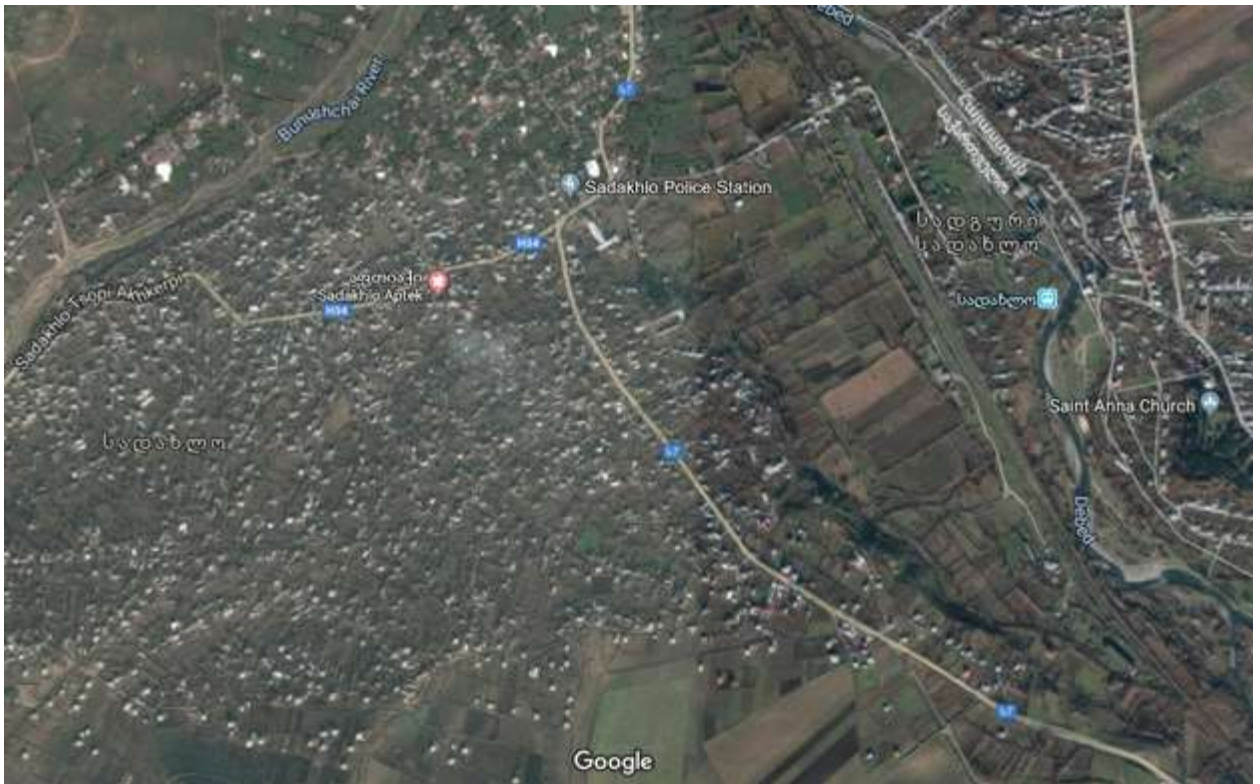

Numbering of houses



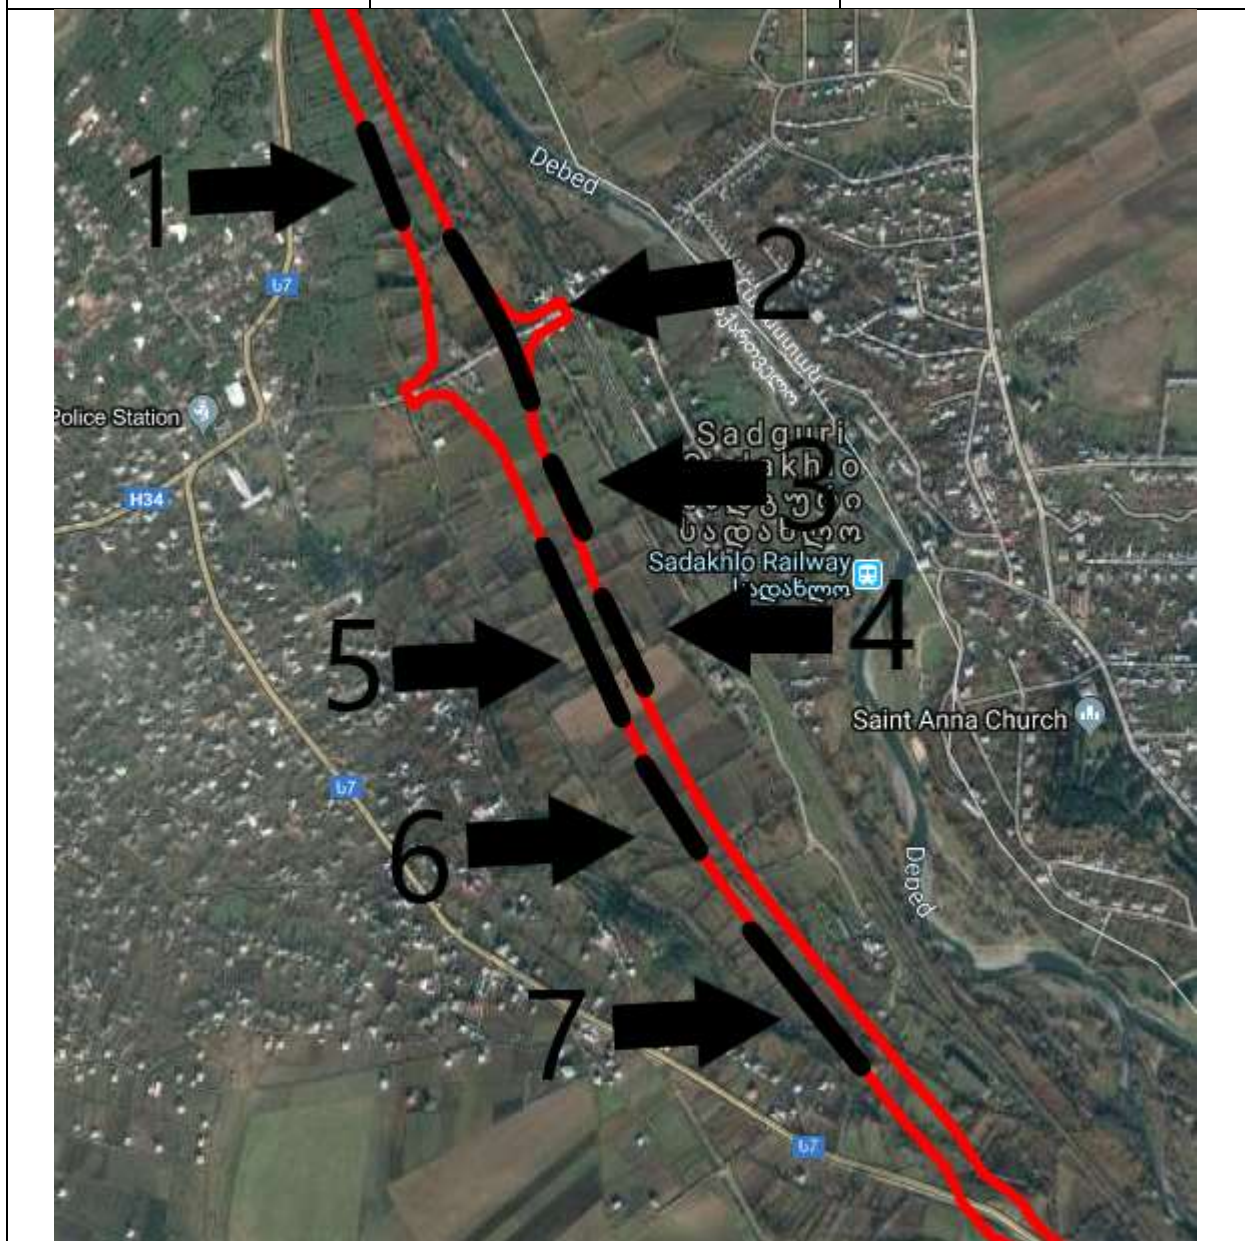


Table of noise level excess

Sadakhlo																		
	Current		Without Mitigation				With Wall Barriers				Porous surface				Wall barriers and 100 km/h			
			Presently		2025		Presently		2025		Presently		2025		Presently		2025	
	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night
Sum of excess (numb	13	13	1	6	13	37	0	1	3	9	0	1	1	8	0	1	3	7

Information about barriers

Barriers		
Wall N	Length (m.)	High (m.)
1	100	4
2	200	4
3	100	4
4	165	4
5	380	4
6	160	4
7	200	4



Sadakhlo																			
			No Mitigation				Wall Barriers				Porous surface				Wall barriers and 100 km/h				
Building N	Current		Construction 2020	After it is built		2025		After it is built		2025		After it is built		2025		After it is built		2025	
	Day	Night		Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night	Day	Night
190	65.4	56.4	60.9	52.6	45.9	56.4	50.0	52.2	45.5	56.0	49.6	49.6	42.9	53.4	47.0	51.6	44.4	55.3	48.9
191	64.7	55.7	59.2	51.7	45.1	55.4	49.2	51.1	44.5	54.9	48.6	48.7	42.1	52.4	46.2	50.4	43.5	54.2	48.0
192	65.5	56.5	57.2	50.6	44.1	54.3	48.2	50.0	43.6	53.8	47.7	47.6	41.1	51.3	45.2	49.4	42.6	53.2	47.0
193	48.7	41.0	60.0	53.3	46.4	57.1	50.5	52.4	45.0	56.2	49.6	50.3	43.4	54.1	47.5	51.8	44.5	55.5	48.9
194	65.4	56.5	57.3	50.3	43.6	54.1	47.7	49.1	42.4	52.9	46.5	47.3	40.6	51.1	44.7	48.5	41.4	52.2	45.9
195	65.2	56.2	57.3	50.9	43.9	54.7	48.0	49.7	42.7	53.5	46.8	47.9	40.9	51.7	45.0	49.0	41.6	52.8	46.1
196	67.5	58.4	57.5	50.6	43.7	54.4	47.8	49.3	42.3	53.1	46.4	47.6	40.7	51.4	44.8	48.7	41.3	52.4	45.8
197	64.4	55.4	57.2	50.4	43.5	54.1	47.6	49.1	42.1	52.9	46.3	47.4	40.5	51.1	44.6	48.4	41.1	52.2	45.6
198	63.9	55.0	56.9	49.8	43.2	53.6	47.3	48.5	41.8	52.2	45.9	46.8	40.2	50.6	44.3	47.8	40.8	51.6	45.3
199	68.6	59.5	56.0	49.6	42.8	53.3	47.0	48.4	41.6	52.2	45.7	46.6	39.8	50.3	44.0	47.7	40.5	51.5	45.0
200	50.9	43.3	58.0	51.4	44.4	55.1	48.5	50.0	42.9	53.8	47.0	48.4	41.4	52.1	45.5	49.3	41.9	53.1	46.4
201	41.0	33.1	53.4	53.1	46.3	56.8	50.4	50.3	43.3	54.1	47.5	50.1	43.3	53.8	47.4	49.6	42.3	53.4	46.8
202	40.8	32.9	51.7	53.3	46.7	57.1	50.8	49.5	42.8	53.3	46.9	50.3	43.7	54.1	47.8	48.8	41.8	52.6	46.2
203	38.8	31.1	52.3	47.0	40.7	50.8	44.8	45.5	39.1	49.3	43.2	44.0	37.7	47.8	41.8	44.9	38.1	48.6	42.5
204	37.2	29.7	52.9	45.3	38.9	49.1	43.1	44.2	37.8	47.9	41.9	42.3	35.9	46.1	40.1	43.5	36.8	47.3	41.2
205	37.2	29.6	52.8	43.2	36.9	47.0	41.0	42.9	36.5	46.6	40.6	40.2	33.9	44.0	38.0	42.2	35.5	46.0	40.0
206	38.3	30.8	53.4	45.4	39.2	49.2	43.3	43.0	36.8	46.8	40.9	42.4	36.2	46.2	40.3	42.3	35.8	46.1	40.2
207	38.9	31.1	51.9	48.0	41.7	51.8	45.8	45.1	38.8	48.9	42.9	45.0	38.7	48.8	42.8	44.4	37.8	48.2	42.2
208	39.1	31.2	60.4	49.9	43.3	53.7	47.4	47.3	40.8	51.1	44.9	46.9	40.3	50.7	44.4	46.6	39.8	50.4	44.2
209	38.2	30.7	60.3	48.3	41.7	52.1	45.8	45.8	39.3	49.6	43.4	45.3	38.7	49.1	42.8	45.2	38.3	48.9	42.8
210	39.1	31.2	55.6	50.2	43.5	54.0	47.6	47.6	41.0	51.4	45.0	47.2	40.5	51.0	44.6	46.9	40.0	50.7	44.4
211	37.5	29.7	52.5	46.9	40.5	50.7	44.6	45.5	39.0	49.2	43.1	43.9	37.5	47.7	41.6	44.8	38.0	48.6	42.4
212	38.8	31.0	52.5	48.3	42.0	52.1	46.1	46.1	39.7	49.8	43.8	45.3	39.0	49.1	43.1	45.4	38.7	49.2	43.2
213	37.1	29.6	53.2	46.7	40.5	50.5	44.6	44.3	38.1	48.1	42.2	43.7	37.5	47.5	41.6	43.6	37.1	47.4	41.6
214	35.4	28.0	56.3	44.1	38.0	47.9	42.1	43.2	37.0	47.0	41.1	41.1	35.0	44.9	39.1	42.5	36.0	46.3	40.5
215	38.4	30.6	56.7	47.4	41.0	51.1	45.1	45.2	39.0	49.0	43.1	44.4	38.0	48.1	42.1	44.6	38.0	48.3	42.4
216	38.8	31.0	53.7	48.0	41.7	51.8	45.8	45.8	39.5	49.6	43.6	45.0	38.7	48.8	42.8	45.2	38.5	48.9	43.0
217	38.8	31.0	56.5	48.2	41.9	52.0	46.0	46.6	40.4	50.4	44.5	45.2	38.9	49.0	43.0	45.9	39.4	49.7	43.8
218	37.9	30.2	54.1	44.8	38.6	48.5	42.7	43.6	37.5	47.4	41.6	41.8	35.6	45.5	39.7	43.0	36.5	46.7	40.9
219	38.3	30.7	52.8	45.1	38.8	48.9	43.0	43.7	37.5	47.5	41.6	42.1	35.8	45.9	40.0	43.1	36.5	46.9	40.9
220	38.2	30.7	56.2	45.1	38.9	48.9	43.0	44.1	37.9	47.9	42.0	42.1	35.9	45.9	40.0	43.5	36.9	47.2	41.3
221	38.3	30.8	52.9	45.5	39.2	49.3	43.3	44.7	38.4	48.5	42.5	42.5	36.2	46.3	40.3	44.0	37.3	47.8	41.8
222	38.5	31.0	55.8	46.1	39.9	49.9	44.0	45.6	39.3	49.3	43.4	43.1	36.9	46.9	41.0	44.9	38.3	48.7	42.7

224	42.6	35.9	55.9	56.5	48.8	60.2	52.9	54.2	46.7	57.9	50.8	53.5	45.8	57.2	49.9	53.5	45.6	57.3	50.1
226	49.1	41.2	56.3	47.3	41.1	51.1	45.2	44.9	38.6	48.7	42.7	44.3	38.1	48.1	42.2	44.2	37.6	48.0	42.1
227	61.0	52.0	54.7	44.9	39.0	48.7	43.1	41.6	35.5	45.4	39.6	41.9	36.0	45.7	40.1	41.0	34.5	44.7	39.0
228	48.1	40.3	54.1	53.4	46.0	57.1	50.1	50.1	42.8	53.9	46.9	50.4	43.0	54.1	47.1	49.4	41.8	53.2	46.2
229	49.1	41.5	54.7	52.0	45.0	55.8	49.1	48.6	41.7	52.3	45.5	49.0	42.0	52.8	46.1	47.9	40.7	51.7	45.0
230	59.1	50.7	55.2	45.7	39.5	49.4	43.6	42.4	36.1	46.2	40.2	42.7	36.5	46.4	40.6	41.7	35.1	45.5	39.5
231	49.0	41.8	56.6	51.3	44.6	55.1	48.7	48.7	42.1	52.5	46.2	48.3	41.6	52.1	45.7	48.1	41.1	51.9	45.5
232	50.8	43.5	61.8	52.0	45.2	55.8	49.3	50.3	43.4	54.1	47.5	49.0	42.2	52.8	46.3	49.6	42.4	53.4	46.9
233	51.7	44.3	53.1	52.0	45.1	55.7	49.2	50.7	43.8	54.4	47.9	49.0	42.1	52.7	46.2	50.0	42.8	53.8	47.2
234	51.9	44.1	50.7	52.8	45.3	56.6	49.4	51.2	43.7	54.9	47.8	49.8	42.3	53.6	46.4	50.5	42.7	54.3	47.1
235	50.9	43.2	59.6	53.7	45.9	57.5	50.0	52.5	44.8	56.3	48.9	50.7	42.9	54.5	47.0	51.8	43.8	55.6	48.2
236	62.3	53.6	59.3	45.2	39.1	48.9	43.2	44.3	38.2	48.1	42.3	42.2	36.1	45.9	40.2	43.6	37.2	47.4	41.6
237	58.3	50.0	53.1	47.7	41.2	51.5	45.3	46.9	40.7	50.7	44.8	44.7	38.2	48.5	42.3	46.3	39.7	50.0	44.1
238	47.9	40.6	58.5	50.7	44.1	54.5	48.2	50.0	43.3	53.8	47.4	47.7	41.1	51.5	45.2	49.3	42.3	53.1	46.8
239	49.9	42.3	58.6	51.5	44.0	55.3	48.1	49.8	42.5	53.6	46.3	48.5	41.0	52.3	45.1	49.1	41.5	52.9	46.0
240	47.3	39.5	58.2	52.1	44.4	55.9	48.5	49.0	41.5	52.8	45.6	49.1	41.4	52.9	45.5	48.4	40.5	52.1	44.9
241	45.5	38.1	59.4	50.7	43.3	54.5	47.4	47.0	39.6	50.8	43.7	47.7	40.3	51.5	44.4	46.4	38.6	50.1	43.1
242	45.2	37.9	60.1	50.8	43.3	54.6	47.4	47.1	39.7	50.9	43.9	47.8	40.3	51.6	44.4	46.5	38.7	50.2	43.2
243	44.1	37.0	52.3	50.9	43.5	54.7	47.6	46.8	39.5	50.6	43.6	47.9	40.5	51.7	44.6	46.1	38.5	49.9	43.0
244	43.8	36.8	54.1	50.0	42.7	53.8	46.8	46.5	39.1	50.2	43.2	47.0	39.7	50.8	43.8	45.8	38.1	49.6	42.6
245	40.6	33.6	57.2	50.8	43.3	54.6	47.4	45.5	38.1	49.3	42.2	47.8	40.3	51.6	44.4	44.8	37.1	48.6	41.6
246	43.3	36.6	53.1	49.7	42.7	53.4	46.8	45.4	38.4	49.2	42.5	46.7	39.7	50.4	43.8	44.7	37.4	48.5	41.9
247	39.4	32.6	53.6	50.6	43.4	54.3	47.5	45.5	38.5	49.3	42.6	47.6	40.4	51.3	44.5	44.8	37.5	48.6	41.9
248	42.8	36.1	53.0	49.3	42.6	53.1	46.7	45.2	38.6	49.0	42.7	46.3	39.6	50.1	43.7	44.6	37.6	48.3	42.0
249	39.5	33.0	54.5	50.0	42.9	53.8	47.1	45.3	38.4	49.0	42.5	47.0	39.9	50.8	44.1	44.6	37.4	48.4	41.9
250	42.6	35.9	55.6	50.3	43.1	54.1	47.2	46.5	39.5	50.3	43.6	47.3	40.1	51.1	44.2	45.8	38.5	49.6	43.0
251	44.3	37.4	54.1	49.3	42.2	53.1	46.3	45.9	38.9	49.7	43.0	46.3	39.2	50.1	43.3	45.2	37.9	49.0	42.4
252	50.9	43.7	56.1	49.0	41.9	52.7	46.0	48.0	40.8	51.8	44.9	46.0	38.9	49.7	43.0	47.3	39.8	51.1	44.3
253	51.0	43.5	55.2	47.8	40.8	51.6	44.9	46.7	39.7	50.5	43.8	44.8	37.8	48.6	41.9	46.0	38.6	49.8	43.1
254 school	51.8	42.9	56.6	48.5	40.8	52.3	44.9	47.2	39.5	51.0	43.6	45.5	37.8	49.3	41.9	46.6	38.5	50.3	42.9
255	48.1	41.0	56.2	47.5	40.5	51.2	44.7	46.3	39.4	50.1	43.5	44.5	37.5	48.2	41.7	45.7	38.4	49.5	42.8
256	46.8	39.6	56.5	47.4	40.5	51.2	44.6	46.2	39.2	50.0	43.3	44.4	37.5	48.2	41.6	45.6	38.2	49.3	42.7
257	41.7	34.8	56.2	47.5	40.6	51.3	44.7	46.3	39.3	50.1	43.4	44.5	37.6	48.3	41.7	45.7	38.3	49.4	42.7
258	44.5	37.4	56.4	47.6	40.6	51.4	44.7	46.3	39.2	50.0	43.3	44.6	37.6	48.4	41.7	45.6	38.2	49.4	42.7
259	41.7	35.0	57.9	48.4	41.4	52.2	45.5	46.8	39.8	50.6	43.9	45.4	38.4	49.2	42.5	46.1	38.8	49.9	43.2
260	45.7	38.0	57.7	50.0	42.3	53.8	46.4	47.9	40.2	51.7	44.3	47.0	39.3	50.8	43.4	47.2	39.2	51.0	43.6